Starting Soon: ITRC Pump & Treat Optimization

- ▶ Pump & Treat Optimization Online Guidance Document, pt-1.itrcweb.org
- ► CLU-IN training page at https://clu-in.org/conf/itrc/pt-1/. Under "Webinar Slides & References", you can download the slides

Use "Join Audio" option in lower left of Zoom webinar to listen to webinar Problems joining audio? Please call in manually

Dial In 301 715 8592 Webinar ID: 834 7035 4992#





Housekeeping

- ► This event is being recorded; Event will be available On Demand after the event at the main training page: https://clu-in.org/conf/itrc/pt-1/
- ▶ If you have technical difficulties, please use the Q&A Pod to request technical support
- ▶ Need confirmation of your participation today?
 - Fill out the online feedback form and check box for confirmation email and certificate





ITRC's Pump & Treat Training


PERFORMANCE-BASED OPTIMIZATION OF PUMP & TREAT SYSTEMS

Sponsored by: Interstate Technology and Regulatory Council (www.itrcweb.org)

Hosted by: US EPA Clean Up

Information Network (www.cluin.org)



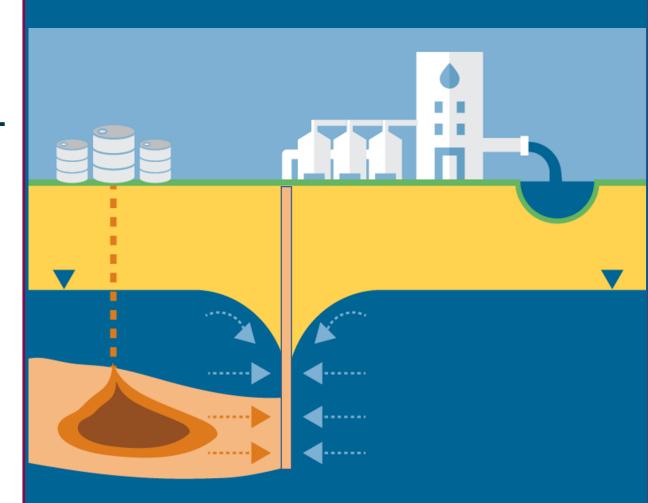

ITRC – Shaping the Future of Regulatory Acceptance

► Host Organization



► Network - States, PR, DC

► Federal Partners







DOE

DOD

EPA

► ITRC Industry Affiliates Program



Academia

- Disclaimer
 - https://pt-1.itrcweb.org/aboutitrc/#disclaimer
- ► Partially funded by the US government
 - ► ITRC nor US government warranty material
 - ► ITRC nor US government endorse specific products

ITRC materials available for your use – see <u>Terms & Conditions</u>

▶ Community Stakeholders







Meet the Trainers



Michael Sexton
Virginia Department of
Environmental Quality
michael.sexton@deq.virginia.gov



Lucas Hellerich
Woodard & Curran
Lhellerich@woodardcurran.com



Patricia Locklin
Maine Department of
Environmental Protection
patricia.a.locklin@maine.gov



Dave Becker
Retired
djbecker@unomaha.edu



Trevor KingWoodard & Curran

TCKing@woodardcurran.com







Poll Question



With how many Pump and Treat (P&T) Systems have you been involved?

- None
- B. 1-10
- 11-25
- 26-50
- More than 50

Of the P&T Systems you have been involved with; roughly what percent have been optimized?

A. None

1-10%

C. 11-25%

26-50%

More than 50%







P&T Introduction

Audience

Assumption

Acknowledgement











P&T Optimization Goals

- Improve the effectiveness and efficiency
 - Maintain or improve receptor protection
 - Ensure adequate maintenance
 - Reduce cost and liability
- Make the remedy more resilient to environmental changes







Key Learning Objectives

Optimization can and should occur throughout the lifecycle of a P&T System.

P&T Optimization can be beneficial to all parties involved in the clean-up.

Recommendations to optimize a P&T system are based on iterative performance evaluations.

Ultimately, P&T systems will either meet their remediation objective or will need to transition.


Optimization is not performed in a vacuum.





Training Roadmap

- ► Life Cycle Optimization Framework (Section 2)
- ► P&T Performance Evaluation (Section 3)
- Process Optimization & Management for Evolving Site Conditions (Section 4)
- ► Transition and Termination (Section 5)
- Baytown Case Study (Appendix B)

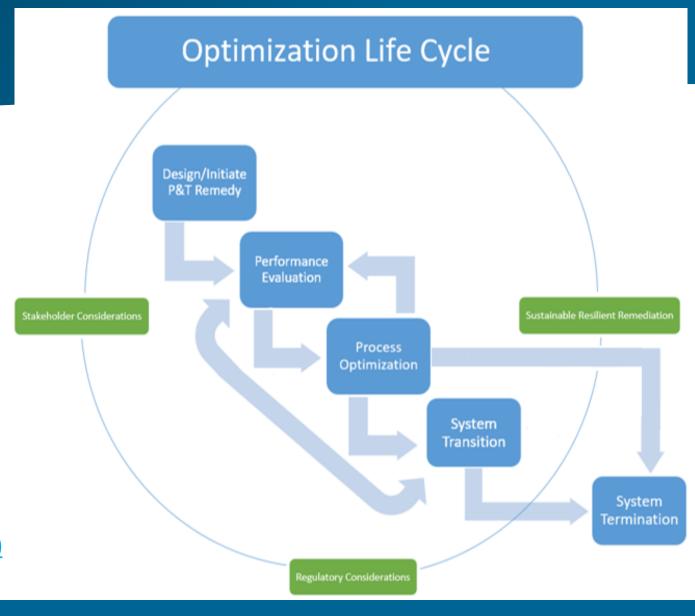







Training Course Icons












Section 2

Life Cycle Optimization Framework for Pump and Treat Systems

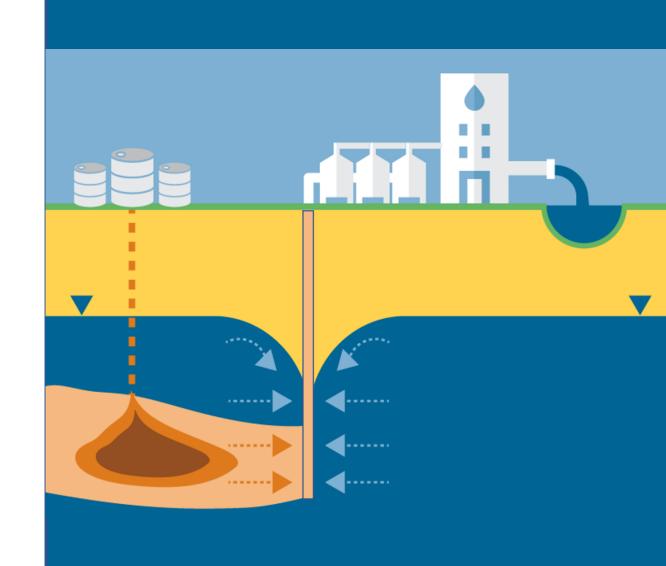

https://pt-1.itrcweb.org/

Life Cycle Optimization Framework

Section Objectives:

- ► Identify when **opportunities for conducting optimization** can occur during the lifecycle of groundwater pump and treat (GWPT) operations.
- Understand how optimization reviews can result in substantial cost avoidance/savings and reduce time to completion.
- ► Identify the opportunities to increase the ability to influence remediation costs.
- ► Evaluate how performance-based P&T optimization can be used to maintain the effectiveness and efficiency of the remedy.





Optimization Life Cycle


Design/Initia P&T Remed Pump and Treat Overview (3) Treatment/ (4) Discharge Control System Conveyance Treatment System Discharge of Remote Processes (e.g., air **Treated Water** Monitoring Equalization (5) Energy/ stripper, GAC, IX) On-site or to Surface Transducers & Tank POTW Extracted Operation water body Sensors Contaminated Water that can flood Ground Surface Downgradient Residual Extraction Monitoring Well Upgradient Reinjection Vadose Zone Well **Monitoring Well** Well Source Extent of Downgradient Capture Zone Overlapping Groundwater Cones of **Water Table** Contamination Depression Well Screen Groundwater Groundwater Flow Direction **Not Captured** Radius of Influence (6) Monitoring (1) Aquifer System **Interception**







Poll Question

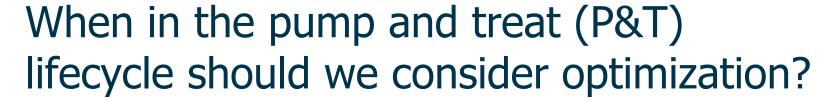


- A. P&T selection and design
- B. Implementation of the P&T system
- c. Evaluation that the system is functioning as designed
- D. Normal operations and maintenance
- E. Site completion
- F. All of the above







Remediation Optimization Stages

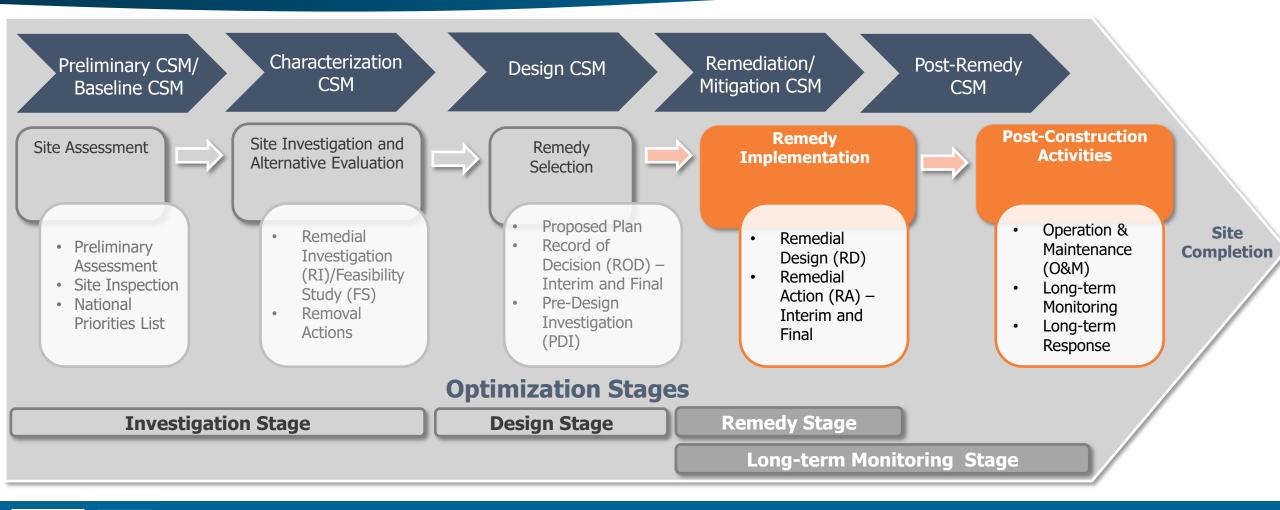








Components of Performance Assessments

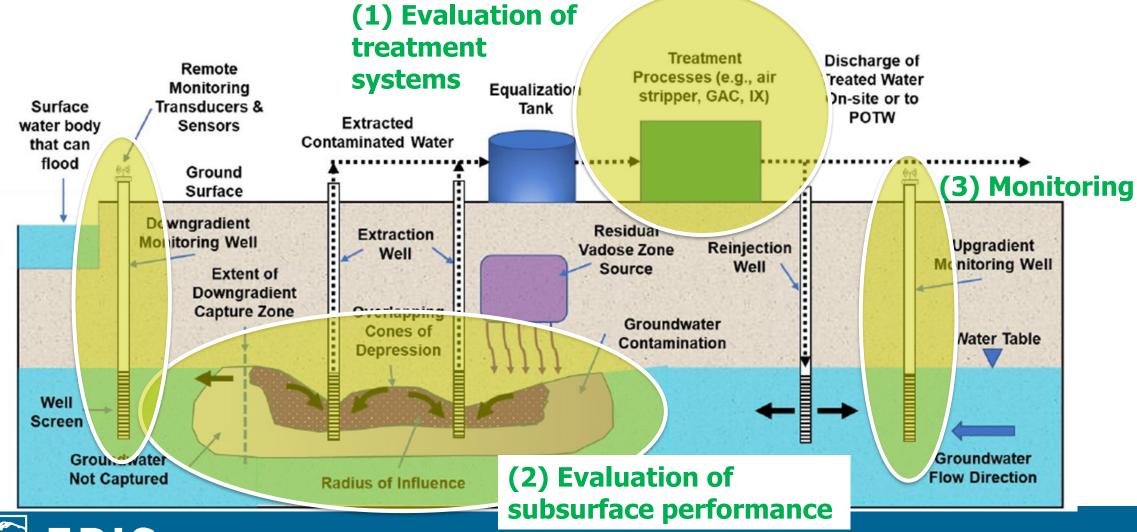







Performance-Based Approach

Considerations	Data
CSM update	Data and information collected during operations to inform further adjustments to the system
Changing conditions	Data on additional sources, additional mass of contaminant, changing concentration distributions, etc
Controlling contaminant transport	Aquifer/hydraulic conditions
Remedy performance	Well design and pumping performance





Poll Question

How can optimization typically affect costs of remediation efforts over time? (choose all that apply)



- A. It may decrease the accuracy of the estimates for total longterm costs
- B. It may increase costs due to longer operation timeframe
- c. It may decrease costs due to shorter operation timeframe
- D. It may increase monitoring costs over time






Remediation Efforts (Costs vs Time)

Figure 2.5. Remediation efforts in relation to remedy lifetime cost and timeframe with performance-based remedial optimization

(ITRC 2004)

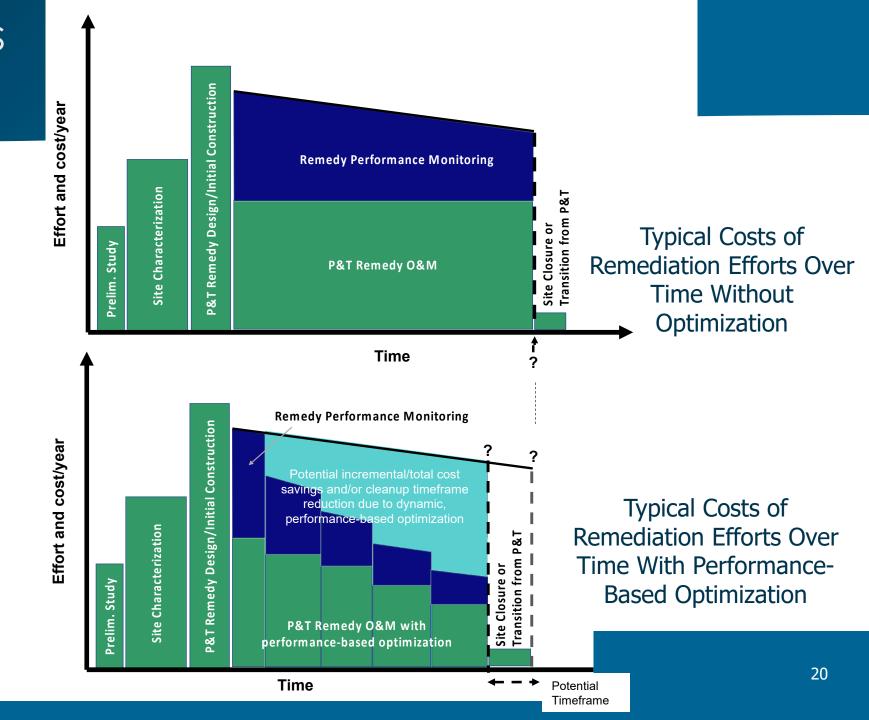







Baytown Township Groundwater Plume Site

- ► Lake Elmo, Minnesota
- ► Metalworks between 1940-1968
- ► First TCE detected in private wells in 1987
- ► Added to NPL in 1994
- ► Contamination under a building, and plume 7 sq mi (up to 270 ft deep)
- ► Hydraulic containment system operating since 2008



Superfund Site boundary of Baytown

Appendix B. Baytown Case Study









Baytown P&T System

- ► Hydraulic barrier system consisting of groundwater extraction wells along the eastern and southeastern perimeter of site property.
- ► Air stripper system to treat the TCE-impacted groundwater.
- ► Treated groundwater is re-infiltrated to the subsurface using a horizontal injection well system.
- ► Problem: Rebounding and fluctuating TCE levels throughout the plume resulted in an Optimization Review in 2011
- ► Relevance: this case study illustrates the framework presented in the ITRC P&T Optimization guidance





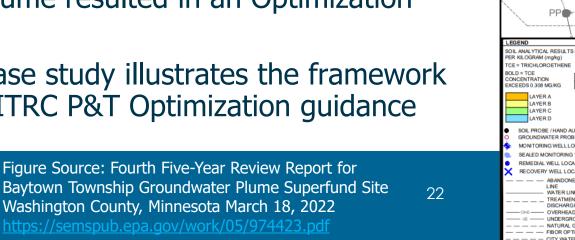

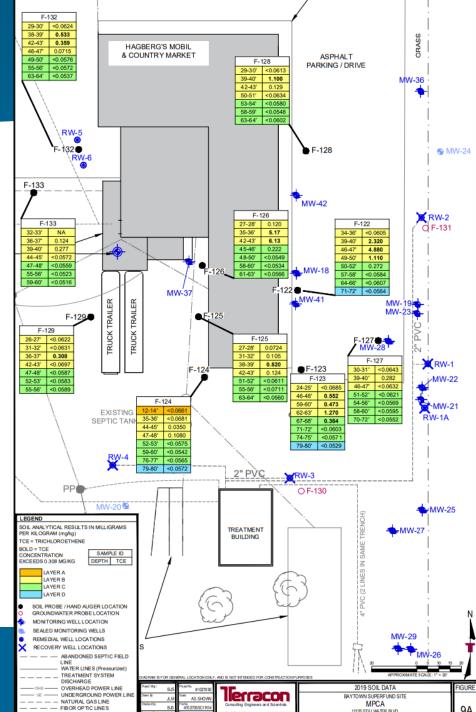

Key Takeaways

Opportunities to conduct optimization can occur throughout the lifecycle of GWPT operations.



Optimization reviews can result in substantial cost avoidance/savings and reduce time to completion.

Opportunities to increase the ability to influence remediation costs include improving operations, modifying the remedy, and/or streamlining of remedy progress monitoring.

Performance-Based P&T optimization uses data to maintain the effectiveness and efficiency of the remedy.









Section 3

Performance Evaluation

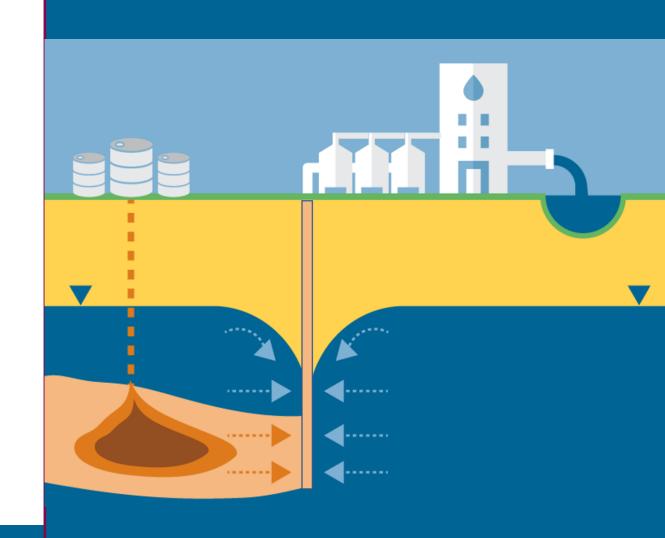



Role Of Performance Evaluation In Life Cycle

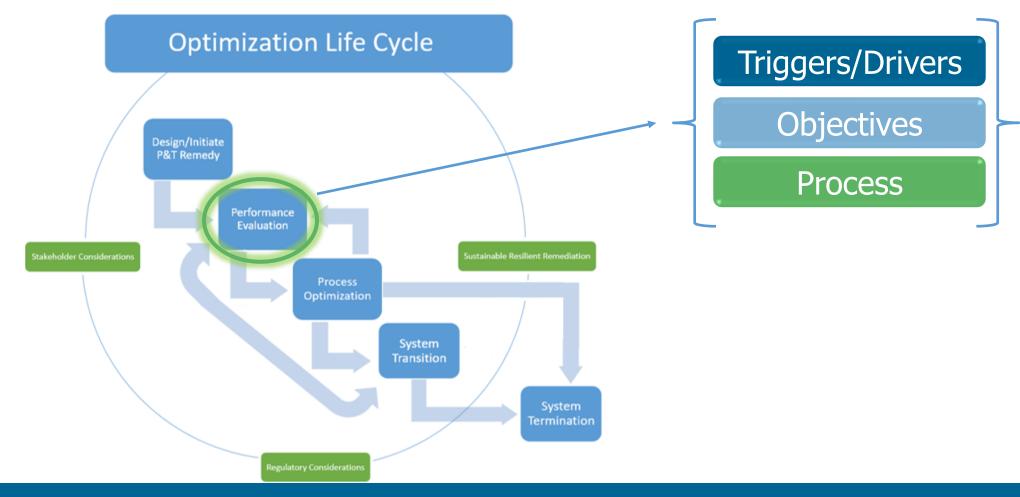







P&T Performance Evaluation

- ► What can trigger the need for performance evaluation
- ► Objectives of performance evaluation
- ► Evaluation process
 - **▶** Overview
 - **►** Elements

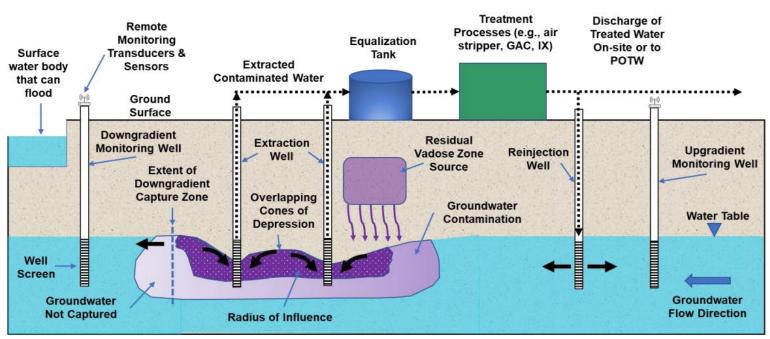


Figure 2-2. Conceptual groundwater P&T system components (adapted from (FRTR 2020)).







Key Takeaways

Performance evaluations are an iterative process. They are not "one-and-done".

Periodic evaluations should be included in scheduled maintenance, after milestones and after external events.

Evaluations should include checking for resiliency and sustainability.

P&T system evaluations may show that the system is already working in an optimal fashion.

Is P&T still the best option?





Poll Question

What can trigger an evaluation of the pump & treat system?


- A. Remediation milestone
- B. Major external event
- c. New regulatory limits
- D. Lack of progress
- E. Stakeholder concerns
- F. All of the above





Internal Drivers (Sec. 3.1.3.1)

- ► Directly related to current system performance
- **►** Examples
 - ▶ New information
 - ► Poor Performance
 - ► Unexpected outcomes

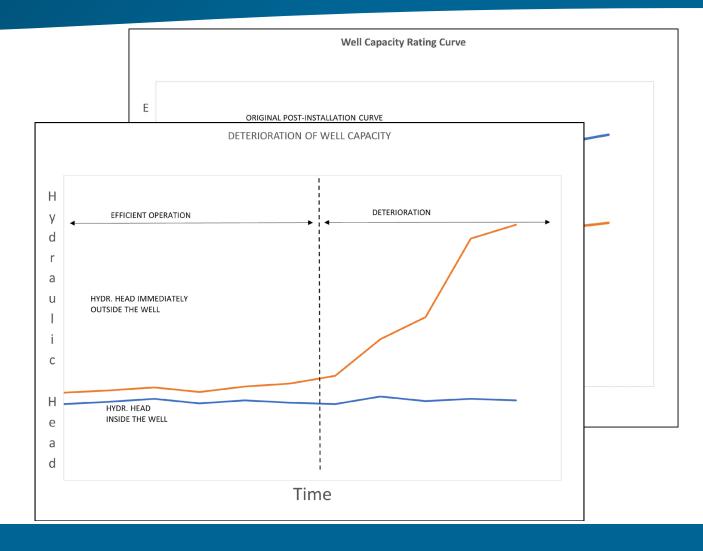







External Driver Considerations (Sec. 3.1.3.2)

- ► Not directly related to current system performance
 - ► Budget Issues
 - ► Regulatory Considerations
 - ► Stakeholder Considerations
 - Resiliency and Sustainability Considerations








Performance Evaluation Objectives (Sec. 3.3)

► Two main objectives:


- ➤ Assess whether the system (as a whole or in part) is fulfilling the project goals (typically capture and discharge limits, sometimes mass removal)
- ► Provide the baseline for recommending possible optimization

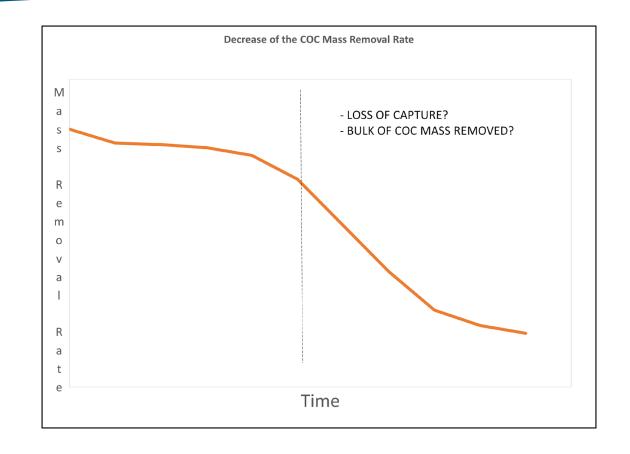





Performance Evaluation Process

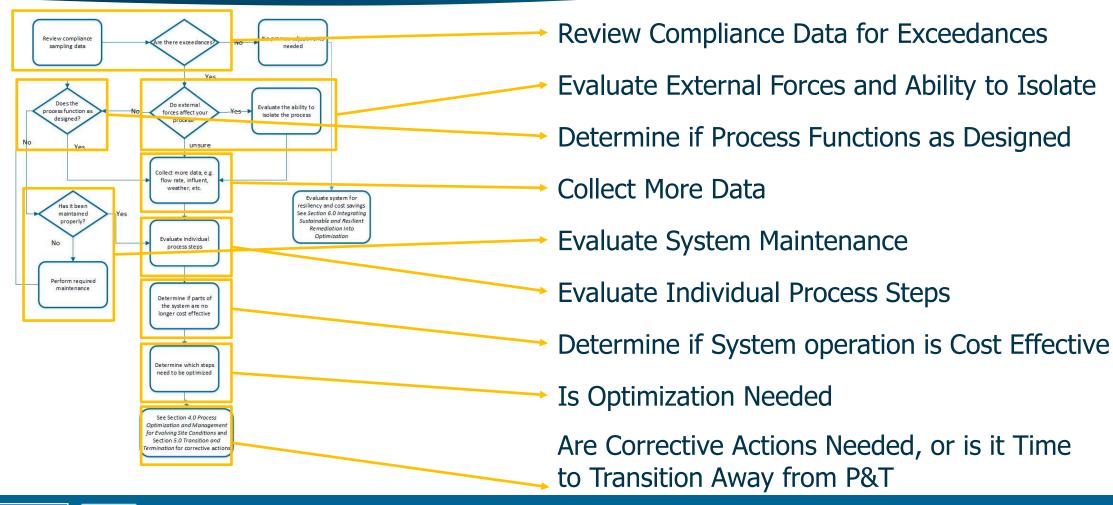







Poll Question






- A. Assess whether hydraulic capture is being maintained
- B. Assess whether discharge limits are being achieved
- c. Obtain the Contaminant Of Concern mass removal history
- D. Acquire historic COC concentration data
- E. Assess the applicability of other remedial technologies



Baytown Township Case Study

- ► Evaluation triggered by:
 - ► Rebounding TCE concentrations after ISCO
 - ► Cost control
- Data gaps in Vadose Zone characterization
- Re-evaluated the system several times

Figure 7D - TCE Concentrations in CJDN East Transect at Select Wells Baytown Ground Water Contamination Site Baytown Township, Minnesota

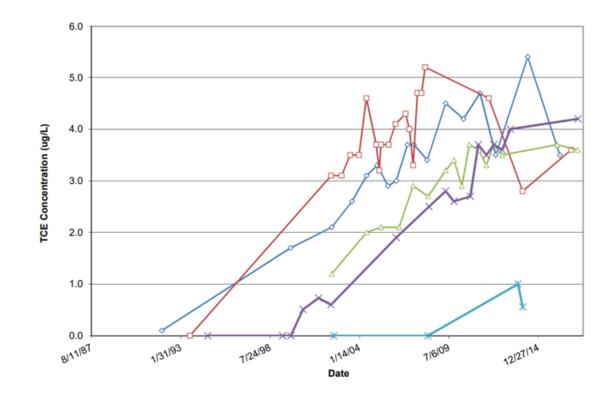







Key Takeaways

Performance evaluations are an iterative process. They are not "one-and-done".

Periodic evaluations should be included in scheduled maintenance, after milestones and after external events.

Evaluations should include checking for resiliency and sustainability.

P&T system evaluations may show that the system is already working in an optimal fashion.

Is P&T still the best option?





Questions











Section 4

Process Optimization

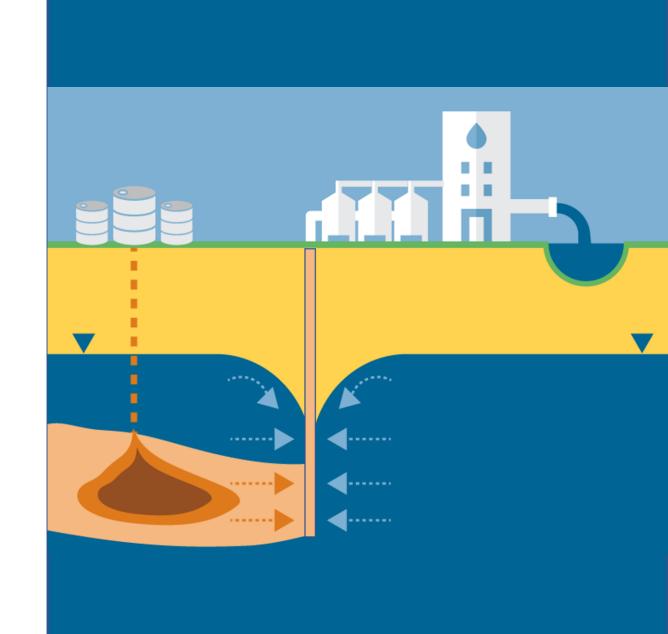

https://pt-1.itrcweb.org/

- ► Directly Building on Results of Performance Evaluation (Sec. 3)
- ► Make Specific Recommendations to:
 - ► **Improve**: Performance, reliability/resilience
 - Reduce: Cost, time to obtaining objectives, and environmental footprint

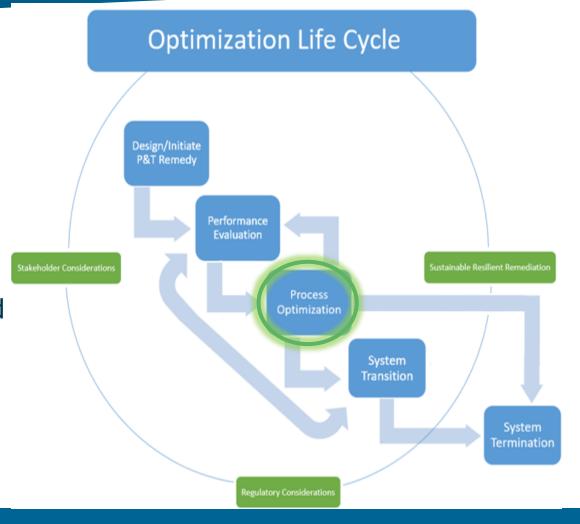







Key Takeaways

Recommendations that address:

Subsurface performance

Above-ground treatment performance

Performance monitoring



Incorporating other technologies or transitioning to other approaches







- ► Optimization of the existing Pump & Treat system
 - ► Necessary to adapt to changes, progress of cleanup
 - ► Can apply better practices, equipment to achieve best value (balance of protectiveness and life-cycle cost)
- ▶ Optimization is forward-looking and should NOT be viewed as an indication of failure but as an opportunity for future improvement









- ► Evaluations can result in changes to the CSM (Sec. 4.2)
 - ▶ Recommend additional source characterization (Sec 4.2.1)
 - ► Recommend identifying additional contaminants (Sec. 4.2.2)
 - ► Changes in groundwater flow directions, saturated thicknesses (Sec. 4.2.3)



*See ITRC Advanced Site Characterization <u>guidance</u> for more information!





Poll Question

Have you undertaken additional site characterization after the P&T remedy was constructed to update the CSM?

- A. Yes, for source area
- B. Yes, for areas near wells
- c. Yes, for several areas
- D. No, the original site characterization had been adequate







► Optimization of existing subsurface components

(Sec. 4.3.1)

- ► Adjust pumping and injection rates and locations to address:
 - ► Inadequate capture (see EPA <u>guidance</u> on capture zone analysis)
 - Shrinking plume
 - Improve resiliency and efficacy, speed cleanup
 - Modeling tools to optimize operations
- ► Address well maintenance issues (guidance provides recommendations)
- ► Recommendations to remedy piping/conveyance issues



Source: Photograph provided by Charles Graff. Used with permission.









Resiliency Check-In: Recommendations can and should consider flooding potential, drought impacts such as declining water levels, and salt-water intrusion potential for coastal sites. See Section 6 of the document for more ideas.

► Optimization of existing above-ground treatment components (Sec. 4.3.3)

Modification of operating conditions to match current conditions

Modification, replacement of older equipment

Increased automation to reduce labor costs







- ► Monitoring Optimization (Sec. 4.3.2)
 - ► Based on understanding of groundwater flow, contaminant concentrations and distribution
 - ► Sampling frequency, locations, methods*
 - ► Analytical methods, reporting*
 - ► **Appendix A** provides overview of tools
 - ► Tools provide a consistent and transparent basis for initial recommendations



*See <u>Section 7</u>, Regulatory Considerations, e.g., for required changes to a permit







- ► Adding enhancements to Pump & Treat (Sec. 4.4)
 - ► Including in situ treatment
- Transition portions or all to monitored natural attenuation
 - ▶ To be discussed more next! Refer to Section 5 of document
- ► Interim measure or in combination with other technologies
 - ► Containment to prevent exposure or uncontrolled migration





- ► Cost estimating for optimization (Sec. 4.5)
 - Cost/benefit analysis
 - ▶ Difficulty in assessing future avoided costs
- ► Content for optimization evaluation report
 - ▶ Background, current conditions, objectives
 - ► Findings and recommendations, cost impacts







Poll Question - Process Optimization

A P&T system has been in operation since 1992 with...

- Air stripping treatment
- High labor and maintenance costs
- Volatile organic compound plume that has been reduced by 50% in footprint and 70% in concentration

What would be some actions that may be appropriate to consider (check all that apply)?

- A. Update automation
- B. Replace equipment/pumps
- C. Optimize well field
- D. Rehabilitate wells, piping











Baytown Case Study

- ▶ 2011 Optimization Evaluation ("Remediation System Evaluation Lite")
- ► Recommendations included:
 - Address source area
 - ▶ Perform additional detailed modeling of natural attenuation
 - ► Capture zone analysis per EPA guidance
 - ► Improve monitoring program
 - ▶ Passive sampling, trend analysis for select private wells





Baytown Case Study

- ► Recommendations (continued...)
 - ► Above-ground treatment systems
 - Reduce blower flow rates on air stripper
 - ► Evaluate point-of-use carbon systems for efficiency
 - ► Reconsider design requirements for class I, division 1 motors
 - Diagnose/address cause of infiltration system scaling, including alternative pH control and altering location of amendment addition
 - ► Implement routine regular inspections of equipment, especially electrical system
 - ► Relocate filtration step in process
 - ► Improve data management, prepare annual reports





Key Takeaways

Recommendations may include any of these:

Modification to the treatment system & monitoring program

Modification to the extraction/injection system

Additional detailed site characterization to support changes

Cost impacts should be assessed & explained

Transitioning to or incorporation of other technologies

Setting the stage for transitioning from pump & treat, discussed next










Section 5


Transition and Termination

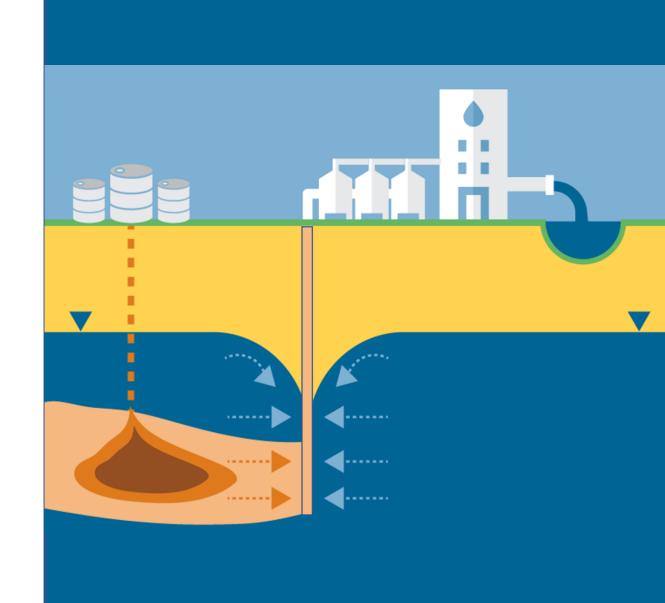

https://pt-1.itrcweb.org/

Introduction to Transition and Termination

- Applies to P&T "end of life"
- Performance evaluation and process optimization completed
- The primary objective is to expedite P&T transitions

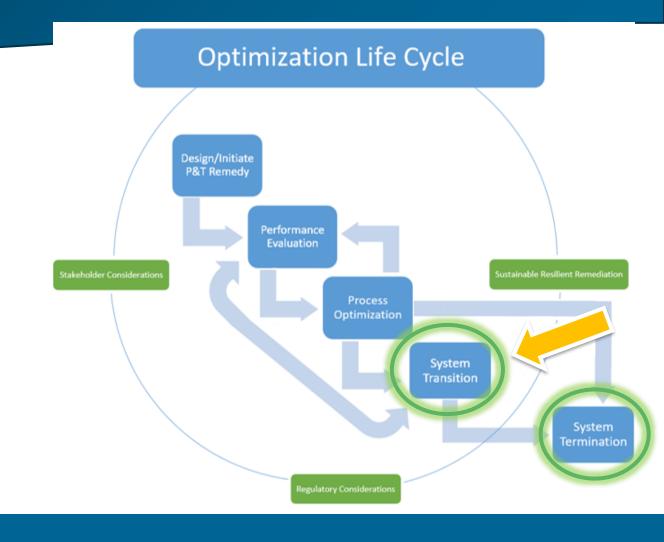







Key Takeaways

Identify key indicators for P&T transition and termination

Value of a transition plan

Step-wise process

Site-specific and variable ways transition can occur

Importance of sustainability/resiliency and regulatory/stakeholders during the process









Poll Question

For sites you worked on, pick the best description of your experience with transitioning out of or terminating a P&T system.

- A. Easily completed after a P&T Optimization program
- B. Smooth, seamless, well-guided, and timely
- c. Clumsy, cumbersome, and time-consuming
- D. Chaotic, no consensus, no directives, messy, or
- E. No experience with P&T transition







Knowledge

Check!

Benefits of a Transition and Termination Plan

- A streamlined approach
- Allows for innovation
- Reduces uncertainties to improve transition process
- Enables more efficient and cost-effective remedies be implemented
- Avoids costly do-overs
- Supports stakeholder needs and confidence





Transition Planning

- Provides strategy for transitioning out of P&T remedy
- Accounts for different remedy outcomes and provides a process to transition to another technology
- Best created prior to starting P&T system as part of the O&M Plan
- Consider performance evaluations and optimization to determine the need for continued operation of the P&T system




*See Section 5.2 of Guidance







Transition and Termination Steps

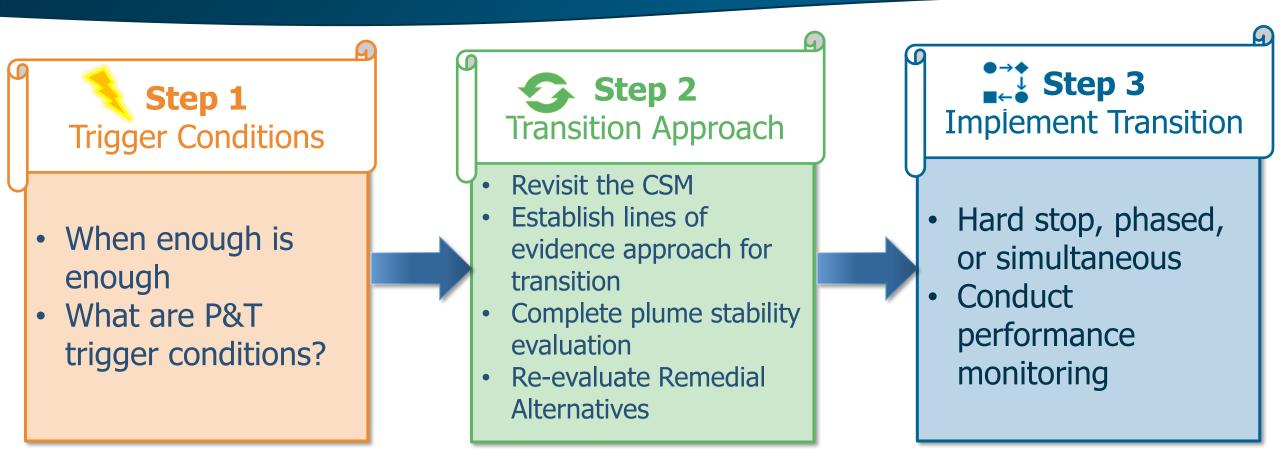







Step 1: Trigger Conditions



- Limitations in meeting remedy objectives
- ► Economic/resource factors
- ► More effective and efficient alternatives
- ► Energy use and waste generation outweighs the value of continued P&T

Step 2 Transition Approach
of non-renewable consumption ces and w**State** generation condinued P&T and form a key trigger for transition

Result of Step 1: Project team consensus on remedy deficiency and need for transition from or termination of P&T






Step 1: Trigger Conditions



► Figure 5-2 from document: Graphical presentation of using mass removal and GHG emission transition metrics

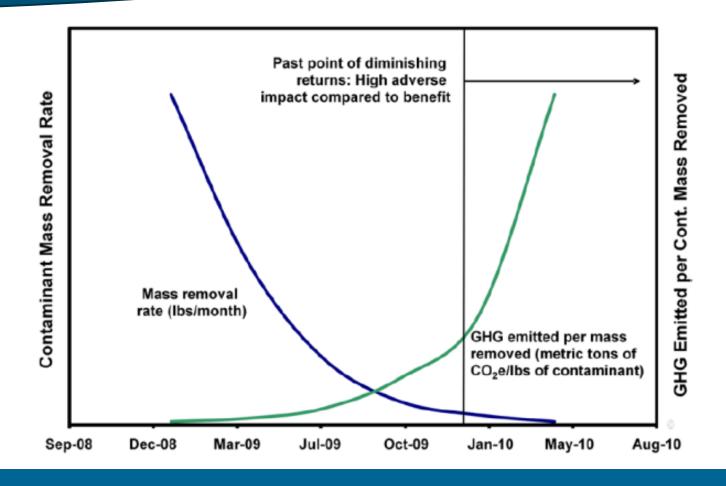





Step 2: Transition Approach



- Identify the preferred remedial alternative
 - e.g., MNA, in situ treatment, and engineering/institutional controls
- Develop lines of evidence that support change in remedy











Step 3
Implement
Transition

Result of Step 2: Identified lines of evidence for a more effective remedial alternative for transition from P&T.







Step 2: Example Lines of Evidence

Decision Element	Outcomes and Associated Criteria				
	P&T Closure	MNA	Continue/Optimize P&T	Supplement P&T	New Remedy Approach
Contaminant Concentrations (C)	C > goal	C> goal but declining	C> goal but declining	C> goal	C> goal
Plume Behavior and Time to RAOs	NA	Plume stable and reasonable time to RAOs	Plume declining and reasonable time to RAOs	Reasonable time to RAOs achievable	Reasonable time to RAOs not achievable
P&T Design, Performance & Cost	NA	NA	Reasonable time to RAOs. Balance time and cost with other remedies	RAOs not readily achievable. Balance time and cost with other remedies	RAOs not readily achievable. Better with new technology








Step 3: Implement Transition



- ► Implementation options include hard stop, phased, or simultaneous
- Transition is site-specific and based on many factors
 - Flexible and adaptable process
- Obtain Regulatory approval for transition

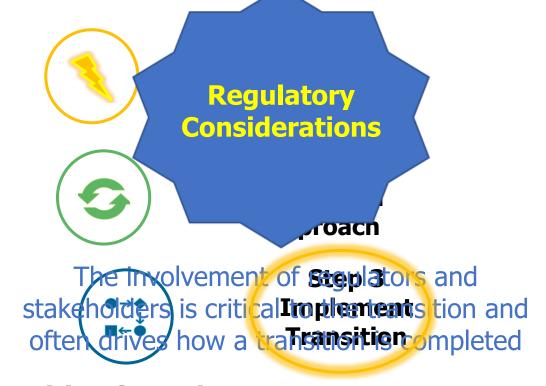


Result of Step 3: Stakeholder agreement on transition from the P&T system to a more effective remedial alternative.





System Termination

- Occurs after implementation of alternative remedial alternative
- ► Requires Regulator approval
- Physical Termination and/or Removal Actions
 - Shutdown Evaluation
 - Final Deactivation of System

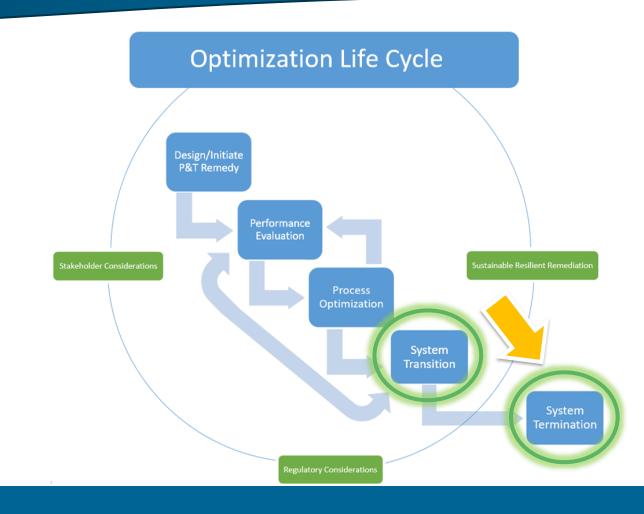





Baytown Case Study

- Transition Evaluation included source area treatment in 2 phases:
 - Phase 1 ISCO
 - Phase 2 ERD
- Transition Complete P&T System shutdown and site transitioned to MNA
- 5-year process








Baytown: System Transition/Termination

- Step 1: Trigger conditions
 - Following source treatment, the P&T system showed diminishing returns.
- Step 2: Transition Approach to Identify the Preferred Alternative and Develop Lines of Evidence
 - MNA is the preferred alternative
 - Trial P&T shutdown started in July 2020.
- Step 3: Implement Transition
 - A Shutdown and Monitoring Plan was prepared by MPCA in 2021.

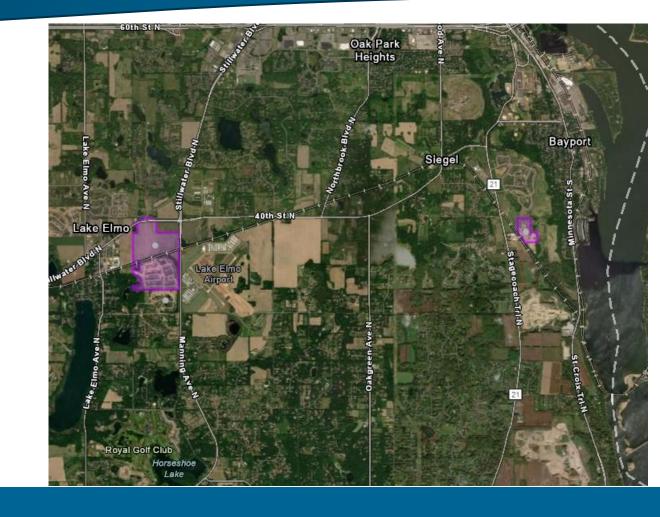







Key Takeaways

Key indicators of the need for P&T transition and termination Determine when "enough is enough" and it's time to make the change

Value of a transition plan to guide project teams during O&M

Step-wise process to implement the transition


Site-specific and variable ways transition can occur

Importance of considering sustainability/resiliency and regulatory/stakeholders during the transition and termination process






Wrap Up

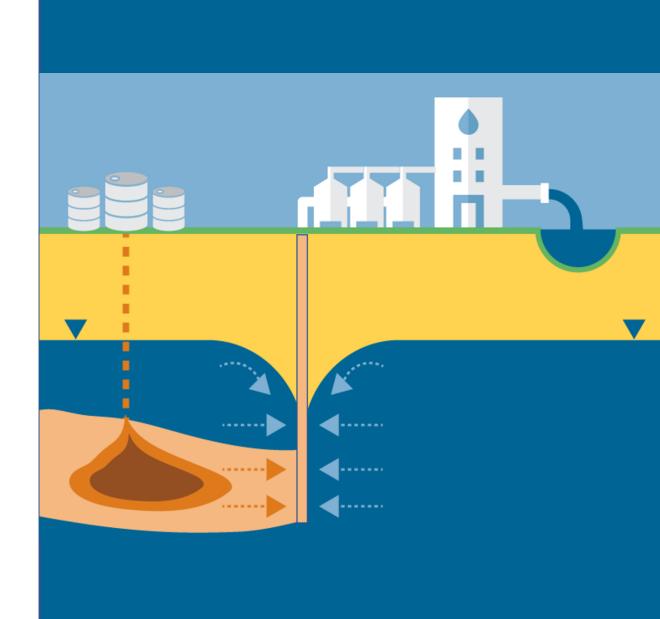

https://pt-1.itrcweb.org/

Training Roadmap

- ► Life Cycle Optimization Framework (Section 2)
- ► P&T Performance Evaluation (Section 3)
- Process Optimization & Management for Evolving Site Conditions (Section 4)
- ► Transition and Termination (Section 5)
- Baytown Case Study (Appendix B)

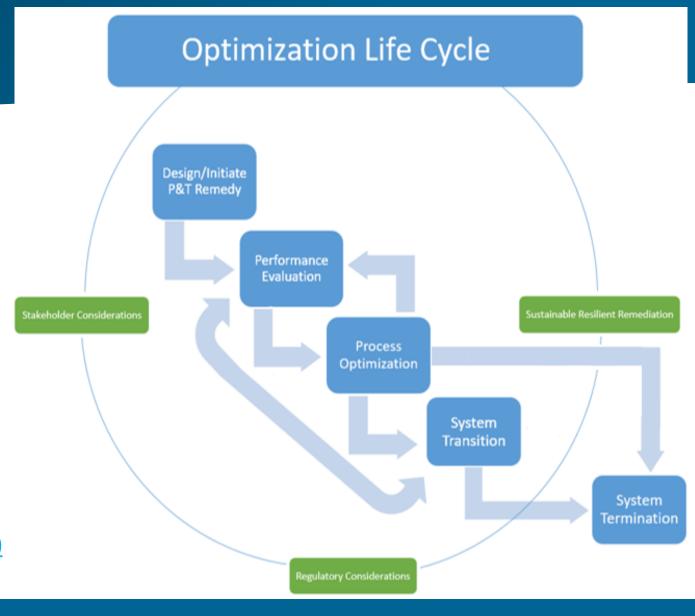







Key Takeaways from the Training

Optimization can and should occur throughout the lifecycle of a P&T System.

P&T Optimization can be beneficial to all parties involved in the clean-up.

Recommendations to optimize a P&T system are based on iterative performance evaluations.

Ultimately, P&T systems will either meet their remediation objective or will need to transition.

Optimization is not performed in a vacuum.





Questions









Thank You!

Certificate of Completion? Fill out the Feedback Form! https://clu-in.org/conf/itrc/pt-1/

Pump & Treat Optimization Online Guidance Document, pt-1.itrcweb.org

Follow ITRC for more trainings and opportunities! https://itrcweb.org











