

**This document was prepared in conjunction with work accomplished under Contract No. DE-AC09-96SR18500 with the U. S. Department of Energy.**

**DISCLAIMER**

**This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.**

# **APPLICATION OF INNOVATIVE TECHNOLOGIES FOR DEVELOPING A STRATEGY TO TREAT CVOCS IN VADOSE ZONE SEDIMENTS – CASE STUDY**

Jay V. Noonkester,\* Ralph L. Nichols, Kenneth L. Dixon

## **Abstract**

Over the last 10 years a mix of innovative and conventional characterization techniques has been used to assess the contamination of vadose zone sediments beneath the pilot-scale test facility known as TNX at the Savannah River Site (SRS) in South Carolina. Shallow soils and groundwater beneath the TNX facility are contaminated with chlorinated volatile organic compounds (CVOCs), trichloroethylene (TCE), carbon tetrachloride (CCl<sub>4</sub>), perchloroethylene (PCE), and chloroform (CHCl<sub>3</sub>). An interim pump and treat remediation system was placed in operation in 1996 to provide hydraulic containment of groundwater containing greater than 500 ug/L dissolved TCE.

In 1994, a vadose zone study was initiated to determine the degree and extent of CVOC contamination above the contaminated groundwater. Headspace sampling and analysis, acoustic infra-red spectroscopy, cone penetrometry, and vadose zone pumping tests were used to determine contaminant concentrations and physical properties related to soil vapor extraction. In 2001, soil vapor extraction (SVE), a presumptive remedy for CVOCs in soils similar to those present beneath TNX, was selected to treat the CVOC contamination. Cone Penetrometer Testing (CPT) with soil vapor sampling provided a detailed understanding of the subsurface geology and CVOC distribution which was essential for proper well design and placement. Twelve SVE wells were installed using direct push technology (DPT) and were tested to determine specific capacity and CVOC concentrations. This information was then used to develop a strategy for operating the SVE system. Based on the results of the baseline testing and previous studies, sets of 2 to 3 extraction wells will be treated using SVE at one-month intervals. This will allow continuous operation of the SVE system and give individual wells up to 3 months for rebound between treatments. This method of operation is intended to maximize contaminant recovery from individual wells and reduce the overall capital investment and operating cost of the SVE system.

\*Noonkester, Jay V., Nichols, Ralph L., Dixon, Kenneth, L., Savannah River National Laboratory, Westinghouse Savannah River Co., Aiken SC 29808

## Background

For approximately 40 years the Savannah River Site produced nuclear material for use in national defense, space, and medical programs in the United States. Pilot-scale tests of chemical processes used in the Defense Waste Processing Facility, Separations Area, and fuel and target manufacturing areas were conducted in the TNX Area of SRS. Non-radioactive waste generated at TNX was disposed in unlined excavations and basins resulting in contamination of the vadose zone and shallow groundwater.

The SRS began monitoring groundwater quality at TNX in 1981 and detected several contaminants in groundwater. Since that time many innovative and emerging characterization and remediation technologies have been demonstrated. Primary contaminants in the shallow groundwater and vadose zone sediments beneath the TNX Area are *dissolved* and *residual* CVOCs such as TCE, CCl<sub>4</sub>, PCE, and CHCl<sub>3</sub>.

In November 1994, an Interim Record of Decision was agreed to and signed by the U. S. Department of Energy (DOE), the U. S. Environmental Protection Agency (EPA), and the South Carolina Department of Health & Environmental Control (SCDHEC). The Interim Record of Decision required the installation of a hybrid groundwater corrective action to stabilize the plume of groundwater contamination by capturing and containing the dissolved contamination that was greater than 500 ug/L TCE (WSRC, 1994). In 2001, the Interim Record of Decision was modified to incorporate the use of SVE to treat soil contaminated with CVOCs (WSRC, 2001a). This paper presents a case study of innovative and conventional techniques to select and deploy a treatment for the contaminated vadose zone soils at TNX.

## Geologic Setting

The TNX Area is located in South Carolina on a terrace adjacent to the Savannah River in the southwest portion of the SRS, (Figure 1). The vadose zone is approximately 15 meters thick at TNX and is composed of fluvial sediments in the Savannah River valley and underlying Coastal Plain sediments consisting of sand, clayey sand, sandy clay and clay layers with several zones containing quartz pebbles and cobbles. The sands are yellow, red and orange and range from poorly to well sorted quartz sand. They have characteristics of fluvial and shallow marine, lagoon or marsh depositional environments.

TNX is underlain by two aquifer systems - a deep aquifer system and a shallow aquifer system. The aquifer systems are separated by a thick layer of clay and silt with thin sand lenses, (Figure 2). There is an upward gradient between the deep and shallow aquifer system equal to about 17 meters of water (24 psi). The upward gradient results in upward groundwater flow from the deep aquifer system to the shallow aquifer system. Lateral groundwater flow in the shallow aquifers beneath TNX is to the west-southwest towards the Savannah River (Nichols, 1993).

The shallow aquifer system is comprised of an unconfined aquifer and a semi-confined aquifer. Depth to the water table varies from zero to 50 feet in the area of groundwater contamination. The unconfined aquifer outcrops in the swamp adjacent to the Savannah River.

## **Previous Investigations and Studies**

The first groundwater monitoring wells at TNX were installed and sampled in 1980. Several constituents including CVOCs, TCE, PCE, CCL<sub>4</sub>, and CHCl<sub>3</sub> were detected in concentrations that exceeded maximum concentration levels (MCLs) for drinking water (Nichols, 1993) Initial characterization efforts were concentrated on groundwater activities and it was not until the mid 1990's that vadose zone characterization began. During the period from 1980 to the mid 1990's, work was stalled because of a pending lawsuit initiated by the National Resources Defense Council. Following the settlement of the lawsuit, work was again stalled until all involved parties agreed to and signed the Federal Facilities Agreement which allowed work to resume.

The first contaminant profiles were prepared in 1995 using results from the headspace analysis of soil samples collected from areas of known CVOC disposal and overlying the most contaminated groundwater, greater than 500 ug/L dissolved TCE, (Figure 3). The analysis was performed on sediment samples collected in sealed vials using a gas chromatograph. The gas chromatograph was equipped with an auto sampler, an electron capture detector and a flame ionization detector. The use of dual detectors provided excellent sensitivity and a large dynamic range in the analysis of CVOCs. This technique allowed depth discrete sampling to become a routine method because it was efficient and cost-effective. This technique is similar to Method 5021 that was later published by the EPA in 1996 (EPA, 1996).

The headspace sampling results were used to finalize the design of a test of the air-lift recirculation well treatment groundwater technology (ARW). Water table wells and vadose zone piezometers installed as part of the ARW test were pump tested to estimate the permeability of vadose zone sediments (WSRC, 1999) and to determine the zone of influence. Data from the pumping tests were analyzed using techniques similar for groundwater pumping tests analysis

by correcting for viscosity and density differences as reported by Massman, (1994). Figure 4 shows typical results for a vadose zone pumping test at TNX.

Following the success of the vadose zone pumping tests, a long-term pulsed SVE test was conducted to study the rate of contaminant recovery. Initially, the concentration of TCE, CCl<sub>4</sub>, and PCE in the exhaust from the pilot-scale SVE test were monitored continuously with a multi-gas, infra-red, photo-acoustic sensor. This provided a detailed record of contaminant recovery data during the early stages of the test that was analyzed to estimate several parameters such as diffusion rates and zone of influence related to contaminant transport in the vadose zone (WSRC, 2000).

After approximately 6 weeks of operation, the continuous monitoring was replaced by the collection of grab samples in Tedlar™ bags for subsequent analysis on gas chromatograph using an electron capture (ECD) and flame ionization detectors (FID), (Figure 5). The pilot scale SVEU was intermittently operated for 2 years to study the effectiveness of SVE by monitoring the rebound of CVOC concentrations in the SVE well, (Figure 6). The pilot scale test provided the necessary data for optimization of the design and operation of the full-scale SVE system.

The strategy for implementing SVE at TNX consists of pulsed pumping in sets of individual wells. The SVE system includes a portable 15 hp portable SVEU connected to individual clusters of SVE wells in the well network using 2 inch diameter flexible hose. This design facilitates pulsed operation of the SVEU on individual sets of wells optimizing the use of equipment by keeping it in continuous operation and decreasing the investment necessary to complete the SVE remediation at TNX. Use of a portable SVEU for pulsed remediation on individual set of wells also increases flexibility in use of the well network and minimizes the amount of permanent piping necessary for operation. After the contaminant recovery rate from a given set of wells has decreased significantly, the SVEU is removed and connected to another set of wells and the CVOC concentration in the previous set is allowed to recover. This method of operation optimizes use of energy for contaminant removal by maximizing the ratio of contaminant mass removed to energy consumed.

## **Full Scale Soil Vapor Extraction**

Data from historical waste disposal records, groundwater contaminant plume maps, headspace soil samples, contaminant profiles, and short and long term SVE tests were analyzed to select potential well locations for the full-scale SVE system. The analysis showed that the area with CVOC contamination in the vadose zone was most likely located beneath building 672-T in the central portion of TNX.

### *Selection of Extraction Zones and SVE Well Installation*

The SVE well network was installed in two phases to incorporate the depth discrete nature of the design associated with well clusters having screens at different depths to address the stratified nature of CVOC contamination at the site. Cone Penetration Testing (CPT) with soil gas sampling was used to accurately locate the zones that would be used to extract contaminated soil vapors (WSRC-TR-2001-00596). Fifteen locations were selected for the CPT investigation in the vicinity of and inside building 672-T, (Figure 7). CPT was utilized because it collects detailed, high quality lithologic data, and can be used to simultaneously collect soil vapor samples, is fast and cost effective, and does not produce Investigation Derived Waste (IDW). Direct Push Technology (DPT) was used to install the SVE wells at the locations identified using CPT.

### Cone Penetrometer Testing

CPT collects continuous data related to sediment behavior by measuring the mechanical response of sediments to the hydraulic advancement of a probe equipped with several sensors and a sampling port. Measurements taken include cone penetration resistance ( $q_c$ ), sleeve friction ( $f_s$ ), and pore pressure ( $u$ ). The penetration resistance and sleeve friction are used to calculate friction ratio ( $R_f=f_s/q_c$ ) which has been correlated to sediment texture (Robertson, 1998). Typically the cone penetration resistance is high in sands and low in clays, and friction ratio is low in sands and high in clays.

The vapor sampling module is a simple screen with a sample port located approximately 0.2 m from the cone penetrometer tip. The cone penetrometer is pushed through the subsurface collecting soil property lithology data and displaying it in real time. When a permeable zone (typically  $R_f < 2\%$ ) is identified, a soil gas sample is collected. Polyethylene tubing is connected to the sample port and extended through the CPT rods into the work area where samples are collected and analyzed. A vacuum pump is used to pull soil vapor through the polyethylene tubing into a Bruel & Kjaer (B&K) infra-red, photo acoustic multi-gas monitor, which continuously analyzes the soil vapor and displays the results on an LCD screen. The B&K monitor analyzed soil vapor for TCE, PCE, CCL<sub>4</sub>, carbon dioxide (CO<sub>2</sub>) and soil moisture.

The sampling system was purged to assure gas samples were representative of subsurface conditions before field data and samples were collected. The system was considered purged when CO<sub>2</sub> concentrations stabilized and were representative of the subsurface environment. CO<sub>2</sub> works well for this purpose since CO<sub>2</sub> levels are much higher in soil

vapor (2,000–40,000 ppmv) than in ambient atmospheric background (500-1,000 ppmv). After the system was purged and CO<sub>2</sub> stabilized, the B&K readings for TCE, PCE, CCl<sub>4</sub> were considered representative of soil vapor concentrations and recorded. In addition to the B&K results, soil gas samples were collected in Tedlar bags from 25% of the sample zones and analyzed with gas chromatography.

Soil gas sample depths were selected using two methods. The first method has been previously described and was based on CPT data. The second method required reversing the vacuum pump flow direction so the flow direction was into the CPT sampling module. As the CPT was advanced into the subsurface, pressure variations were observed with a pressure gauge that was connected in the system. High pressures were observed as the CPT advanced through a clayey zone and low pressures in a sandy zone. When the pressure dropped, the push was stopped and the vacuum hoses were reversed creating a vacuum and a soil gas sample was collected. This method proved to be effective and easy to perform and was the method most relied upon to pick permeable zones for soil gas samples. An additional benefit of reversing the vacuum pump hoses and creating a positive airflow into the screen is it helped prevent smearing and clogging of the sample port screen when advancing through clayey zones. Seventy-two soil vapor samples were collected and analyzed for TCE and CCl<sub>4</sub> using the B&K monitor and 18 duplicates were collected in Tedlar bags for analysis using gas chromatography.

Sediment data from CPT and soil gas samples results were compiled into cross-sections and contour maps for further analysis to select screen intervals for SVE wells. One cross-section (A – A') is included as an example to show TCE concentrations at sample depths and selected screen zones, (Figure 8). The stratigraphy was divided into four zones, Zone A through Zone D, with Zone A being the shallowest and Zone D the deepest (Figure 8). Two of the zones were permeable enough to collect soil gas samples, Zone B and Zone D, while Zone A and Zone C were too clayey to yield soil gas samples. The upper permeable zone, Zone B, consisted mostly of sand, silty sand and clayey sand and varied in thickness from 3 to 5.5 meters. The lower permeable zone, Zone D, consisted of sand and silty sand, varied in thickness from 1.2 to 2.1 meters, and extended into the capillary fringe at several of the locations. A contour map was created to show TCE concentrations in Zones B and D, (Figure 9).

SVE wells were installed at locations with detectable CVOC concentrations and screens were placed permeable Zones, B or D. Separate wells designated U (upper) for Zone B and L (lower) for Zone D were installed in each zone to allow the use of depth discrete SVE. Well spacing was based on drawdown test results from previous SVE pumping

tests and the anticipated surface seal effect of the foundation of building 672-T. More wells were screened in zone D since CVOCs were found in higher concentrations and over a wider area (Figure 10).

## Well Installation

Direct Push Technology (DPT) was selected to install the SVE wells because it has been found to produce high quality SVE wells in unconsolidated sediments in the vadose zone (WRSC, 2001b). The well installation process involves pre-pushing a pilot hole using a standard DPT rod and tip to total well depth. The pilot hole is enlarged to receive the well materials by advancing a standard DPT rod with a 7.62 cm (3 in.) diameter modified “dummy” tip. After the pilot hole is completed, the well assembly begins. A solid steel tip is threaded to the first section of well material, which is usually a sump section. The steel tip provides a solid platform for the DPT rods to push against as the well is pushed to depth. The well is pushed to depth from the inside of the well casing using the DPT rods. Once the well is pushed to total depth, the DPT rods are removed.

SVE wells were constructed using 5.08 cm (2 inch) diameter PVC casing and stainless steel screens and sumps. Well screens were constructed of 0.254 mm slot 305 stainless steel schedule 5 shutter screen (a.k.a. louver screen) with ASTM F480 compatible flush threads. Shutter screen was developed for water well installations in large diameter, deep, gravel envelope wells with the louvers facing down. Shutter screens were chosen because of their unique design that prevents smearing and clogging of the screen during installation when the well is pushed into the subsurface. Smearing and clogging can become a particularly difficult problem when the well is pushed through clayey sediment. The shutter screens were installed with the louvers facing up to push sediment away from the screen openings as the well is advanced through clayey material, (Figure 11). Grout was used to seal the annulus above the well screen to prevent short circuiting of air along the well casing. A one foot long collar (grout upset), the same diameter as the pilot hole, was welded to the top of each well screen before installation to prevent grout from fouling the screen. A tag line was lowered into each well to make sure no grout had made it by the collar and contaminated the screen.

Sumps were installed on most of the wells for the purpose of collecting sediment that is pulled into the well during SVE operations, thus reducing clogging of the screen. A five foot sump was installed on the U wells screened in Zone B. Since the DPT tool was not capable of pushing through a saturated fine-grained sand layer at approximately 15 meters, most of the wells installed in Zone D were not installed to the total desired depth. Sump lengths were shortened or eliminated to maximize total depth of screen zones in Zone D. Screens were extended into the water table when



possible to take advantage of temporal declines in the water table that drain sediments and expose more contaminated sediment.

### *Baseline Testing*

Baseline SVE tests were performed on each of the twelve SVE wells to establish operating parameters including flow rate and CVOC concentrations. The results from the baseline test were subsequently used to develop a strategy for pulsed pumping of different sets of wells to allow continuous operation and maximum contaminant removal rate. The baseline tests were conducted as follows:

1. Collect pre-test soil gas sample using oil-less sampling vacuum pump and Tedlar bag™
2. Pump SVE well for approximately 1 day
3. Monitor flowrate with Kurz™ insertion flow transmitter
4. Monitor vacuum at wellhead
5. Collect soil gas sample at wellhead sample port after one hour of operation and after twenty-four hours.
6. Measure vacuum in the other eleven SVE wells using digital manometer immediately before terminating the test.

### **Well Performance**

Baseline SVE testing was performed using a portable, trailer mounted SVE unit with a maximum capacity of 355 mm Hg vacuum and flow of 3,483 slpm. A portable generator was used to power the unit. A 2 inch diameter flexible hose was used to connect to the SVE wells. Vacuum pressure was measured from a direct reading vacuum gauge located at the well head.

Flow rates varied greatly during the baseline testing ranging from 8 slpm (<1 scfm) to 3,483 slpm (123 scfm). The average specific capacity (flowrate/applied vacuum) for Zone B wells of 23 slpm/mmHg was higher than the specific capacity for the Zone D wells, 2 slpm/mmHg (Table 1). The difference in specific capacity between the U and L wells can be attributed to differences in lithology, length of screened interval, and soil moisture. L wells are screened across Zone D through the highly layered sediments in the capillary fringe and beneath the water table. As a result, the “effective length” of these well screens depends on the depth to water.

Cross-section A – A” (Figure 8) shows the fine grained texture and layered nature of sediments in the L well screen interval. Variations in effective screen length for L wells, heterogeneity in the sediments in Zone D, and increased soil moisture in the capillary fringe, reduce specific capacity for L wells. The U wells are screened primarily

in Zone B that has a more uniform thickness and is less heterogeneous than the L well screen interval. As a result there is less variability in specific capacity for the U wells.

### Contaminant Recovery

Vapor samples were collected from each of the SVE wells during baseline testing and analyzed for CVOC using gas chromatography. Varying amounts of TCE, PCE,  $\text{CCl}_4$ ,  $\text{CHCl}_3$ , and cis-1,2-dichloroethylene (c-DCE) were detected in the samples (Table 1). TCE and PCE concentrations in samples from the SVE wells were consistently less than in samples collected during the CPT with the exception of well TVX-7L. The lower CVOC concentrations from SVE wells can be attributed to the larger soil gas sample zone. Samples collected from wells are collected from a screen that is 3 to 6 m in length compared to the CPT soil gas sampling port length which is only 0.2 m in length, so mixing of varying soil gas concentration occurs.

SVE well TVX-7L had the highest concentration of individual CVOCs during the baseline test. TVX-7L was unique in that it had the lowest flow rate (8.5 slpm) of the wells. Even though it had the highest concentrations, because of the low flow rate, it will be one of the least productive for contaminant removal. The low flow rate most likely indicates the presence of fine grain materials in the screen zone which is where the highest concentrations have been found. The higher concentration in TVX-7L may be the result of diffusion from fine grained sediments where residual CVOCs are present and it is expected that the higher concentrations will drop quickly during active SVE because of the slow diffusion rate. The baseline test for well TVX-7L lasted for only one hour due to the very low specific capacity of the well. Additional tests will be performed on TVX-7L to determine if higher flow rates can be achieved by development from pumping and if the higher concentrations can be sustained over a longer period of time.

### Zone of Influence

Estimating the Zone of Influence (ZoI) produced by an SVE well network is a common method for designing vapor extraction systems. The ZoI is the volume of soils that is subjected to a vacuum that exceeds a predetermined critical vacuum to ensure containment/removal of contaminated vapors within the ZoI. A critical vacuum for the ZoI is established by monitoring subsurface gas pressure to determine the nominal magnitude of natural variations resulting from diurnal changes in atmospheric pressure. Results from previous studies at TNX show that natural diurnal variations in subsurface pressure are approximately 2–3 cm  $\text{H}_2\text{O}$  (Nichols 1997). Based on this result and presence of heterogeneous soils, particularly in zone D, a conservative critical vacuum of 25 cm  $\text{H}_2\text{O}$  was selected. Contour maps were constructed to show ZoI for each well. Baseline test data for TVX-5U and TVX-5L are shown as examples, Figure

12. A digital manometer vented to the atmosphere was used to measure vacuum in surrounding SVE wells during each test to measure individual well vacuum drawdown, Table 2. In general, the U wells have larger zones of influence than the L wells as would be expected based on the average specific capacities for each series of wells.

The ZoI appears to propagate across zone C, which was believed to be a confining unit separating zones B and D. During baseline testing, high vacuum readings were recorded, Table 2. Even though vacuum drawdown is propagating across zone C does not necessary result in the ZOI crossing zone C.

The concrete foundation of Building 672-T which lies in the center of the area of contamination, acts as a surface seal to prevent short circuiting of atmospheric gas into the subsurface. The results from the baseline test performed on TVX-5U and TVX-5L are shown in, Figure 12. Testing on well TVX-5U demonstrates the positive effect that a surface seal has on the ZoI. TVX-5L, which is in the much less permeable zone D, has a much smaller ZOI. Results from the other baseline tests show the same relationship between U and L wells during individual well tests (Table 2). Based on the results of the baseline testing and previous studies, sets of 2 to 3 extraction wells will be treated with SVE on one month intervals. This will allow continuous operation of the SVE and give individual wells up to 3 months to rebound between treatments. This method of operation is intended to maximize contaminant recovery from individual wells and reduce the overall capital investment and operating cost for the SVE system.

## **Summary and Conclusions**

The TNX SVE case study is an example of integrating innovative and baseline characterization for cost effective remedial SVE testing. An understanding of the subsurface geology in Coastal Plain sediments and the associated heterogeneities in the sands and clays is the first step to an effective system design. Understanding the vadose zone soil properties allowed proper well design and construction materials that would minimize clogging and smearing of the well screen and maximize vapor recovery. Combining knowledge of the subsurface with depth discrete headspace sample data and soil vapor sample data minimized the size of the SVE well network and associated equipment. Understanding the specific capacities and relationships between the shallow and deeper wells assisted in delineating the areal and vertical extent of ZoI and the distribution of CVOCs concentrations in the subsurface. This study is a good example of integrating geology and engineering in designing and testing a remedial system. The overall remedial strategy combined with cost effective implementation has produced an effective and simplified system both technically and financially.

## **Acknowledgement**

The information contained in this article was developed during the course of work under Contract No. DE-AC09-96SR18500 with the U.S. Department of Energy (DOE). The authors specifically acknowledge the support of the DOE Environmental Management Program, the Environmental Restoration Division and other operating divisions of the Savannah River Site who support the clean-up of the TNX Area. The authors express particular appreciation to Charles Betivas for his tireless efforts to ensure the highest quality of field work throughout the odyssey that is the remediation of CVOCs at TNX. We would also like to recognize the support of Gerald Blount and Dennis Stapleton for their programmatic support and contributions to the regulatory strategy to implement this graded approach to remediation.

By acceptance of this document, the publisher and/or recipient acknowledges the U.S. Government's rights to retain a nonexclusive, royalty-free license in and to any copyright covering this document, along with the right to reproduce and to authorize others to reproduce all or part of the copyright material. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the Westinghouse Savannah River Company. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the Westinghouse Savannah River Company, and shall not be used for advertising or product endorsement purposes

## References

EPA, 1996. Volatile Organic Compounds in Soils and Other Solid Matrices Using Equilibrium Headspace Analysis. Method 5021.

Massman, 1994. Estimating air conductivity and porosity from vadose zone pumping tests. Journal of Environmental Engineering, American Society of Civil Engineers. Vol. 120, No. 2, pp. 313-327.

Nichols, R. L. 1993. Characterization of Shallow Groundwater at TNX (U). WSRC-TR-92-508, Rev. 0. Westinghouse Savannah River Company, Savannah River Site, Aiken SC

Nichols, R. L. 1997. TNX Area Soil Vapor Extraction Test Treatability Study Report (U). WSRC-TR-97-0336, Rev. 0. Westinghouse Savannah River Company, Savannah River Site, Aiken SC.

Robertson, P. K. 1998. Cone Penetration Testing Geotechnical Applications Guide. Produced by: ConeTec Inc. and Gregg In Situ Inc.


WSRC, 1994. Interim Action Record of Decision Remedial Action Alternative – TNX Area Groundwater Operable Unit (U). WSRC-TR-94-0375, Rev 0. Westinghouse Savannah River Company, Savannah River Site, Aiken SC.

WSRC 1999. TNX Area Phase II Soil Vapor Extraction Test Treatability Study Report (U), WSRC-TR-99-00051, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2000. TNX Soil Vapor Extraction Multiphase Model Summary (U), WSRC-TR-2000-00291, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2001a. Explanation of Significant Differences to the Revision 1 Interim Record of Decision for the TNX Area Operable Unit Groundwater (U), WSRC-RP-2001-00764, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2001b. Report on the Effectiveness of the C-Area Burning/Rubble Pit (CBRP) (U), WSRC-RP-2001-4086, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

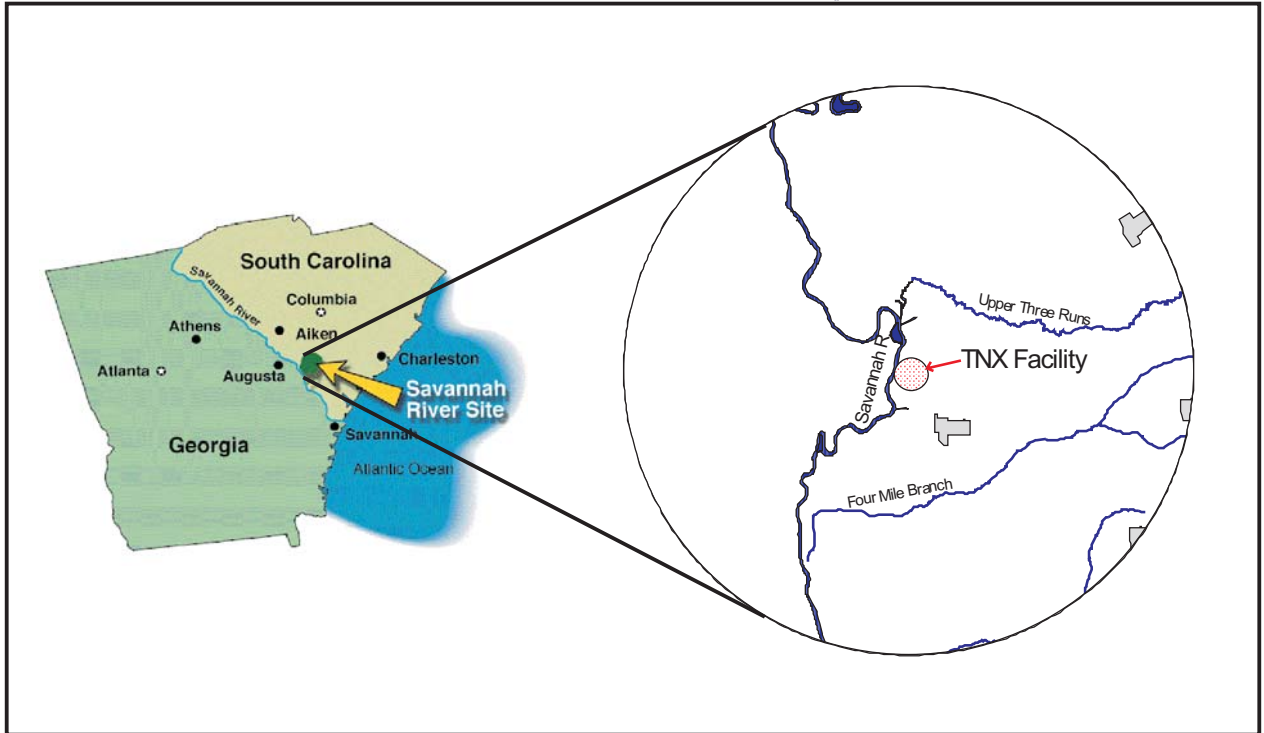

**Figure 1: Location of the TNX facility at the Savannah River Site**


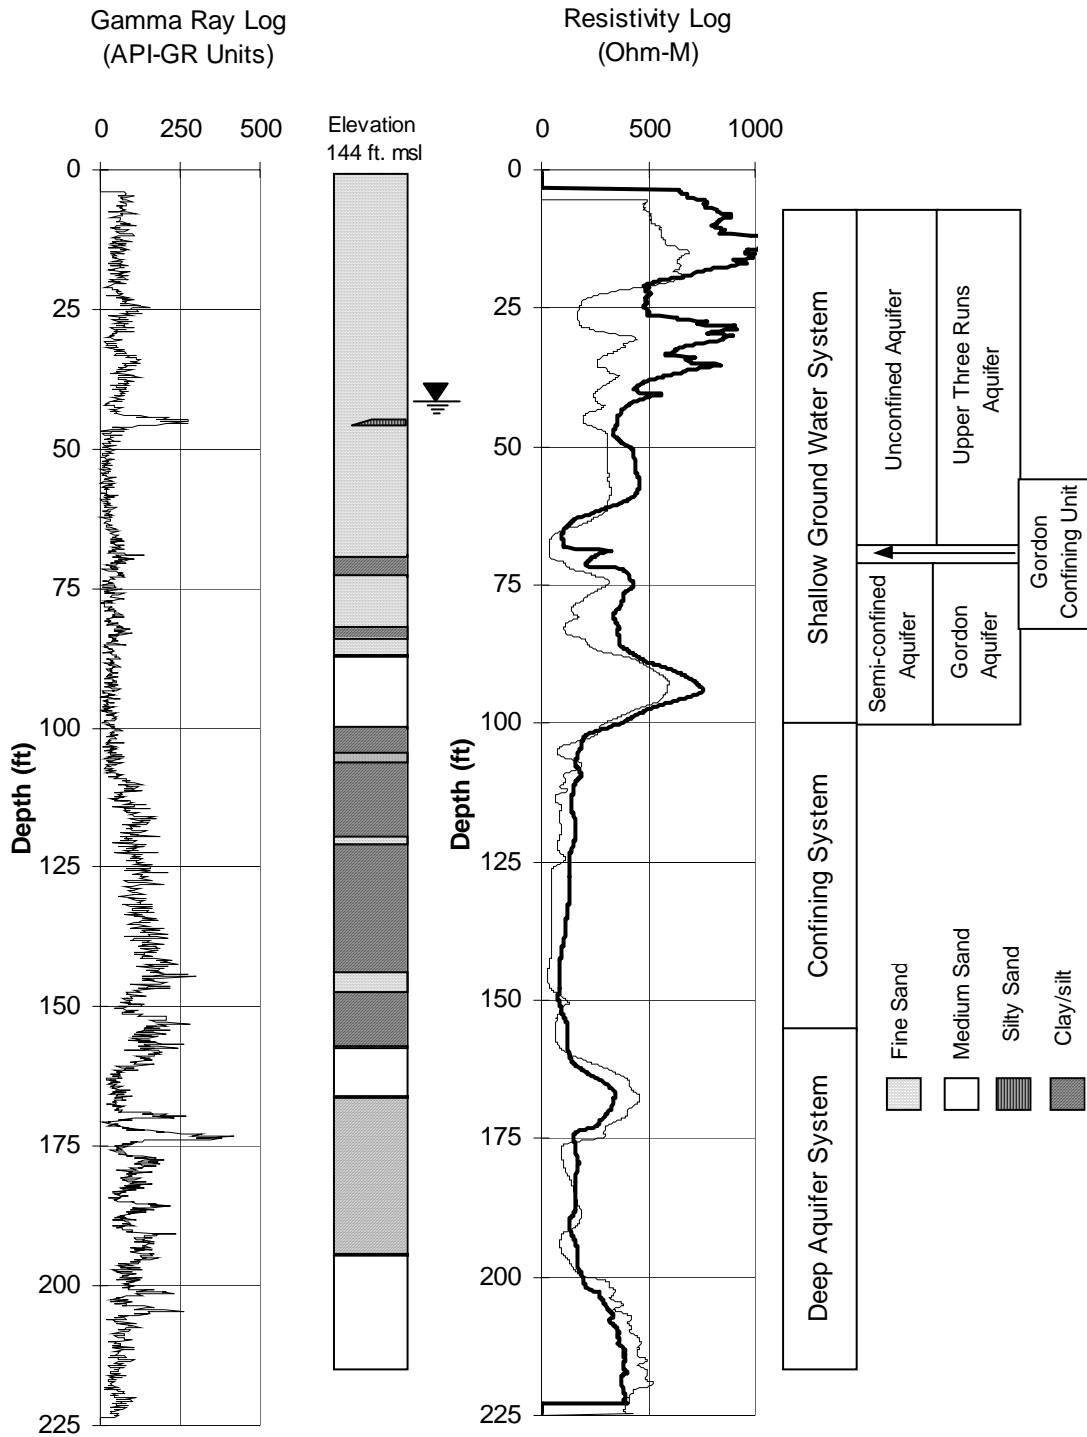


Figure 2: Hydrostratigraphic section for the shallow groundwater system at TNX

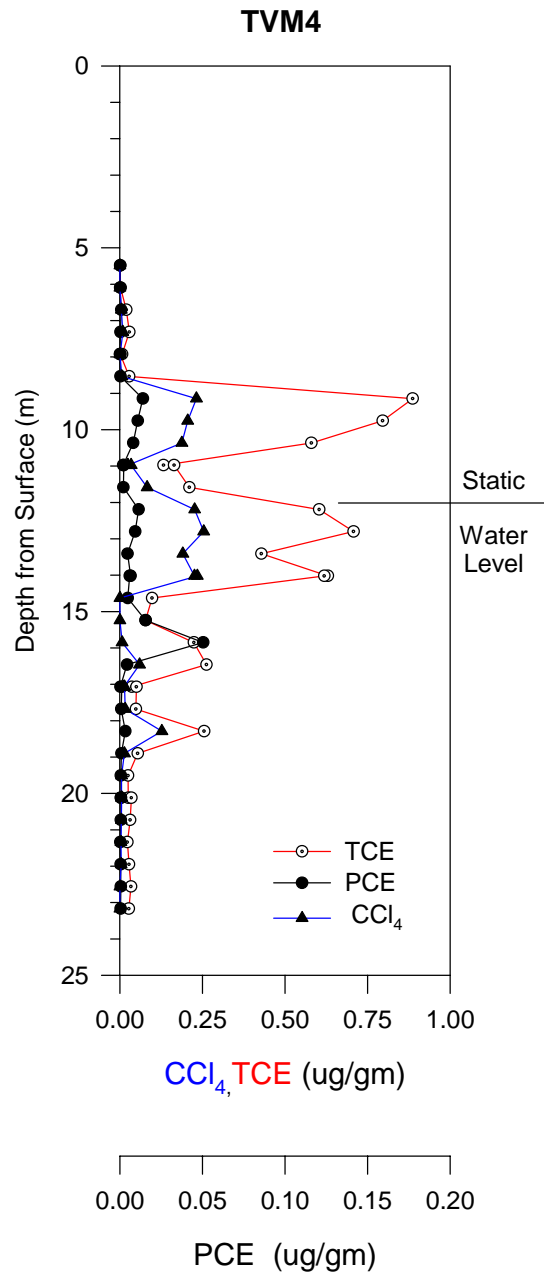

**Figure 3: Typical contaminant profile beneath the TNX facility**



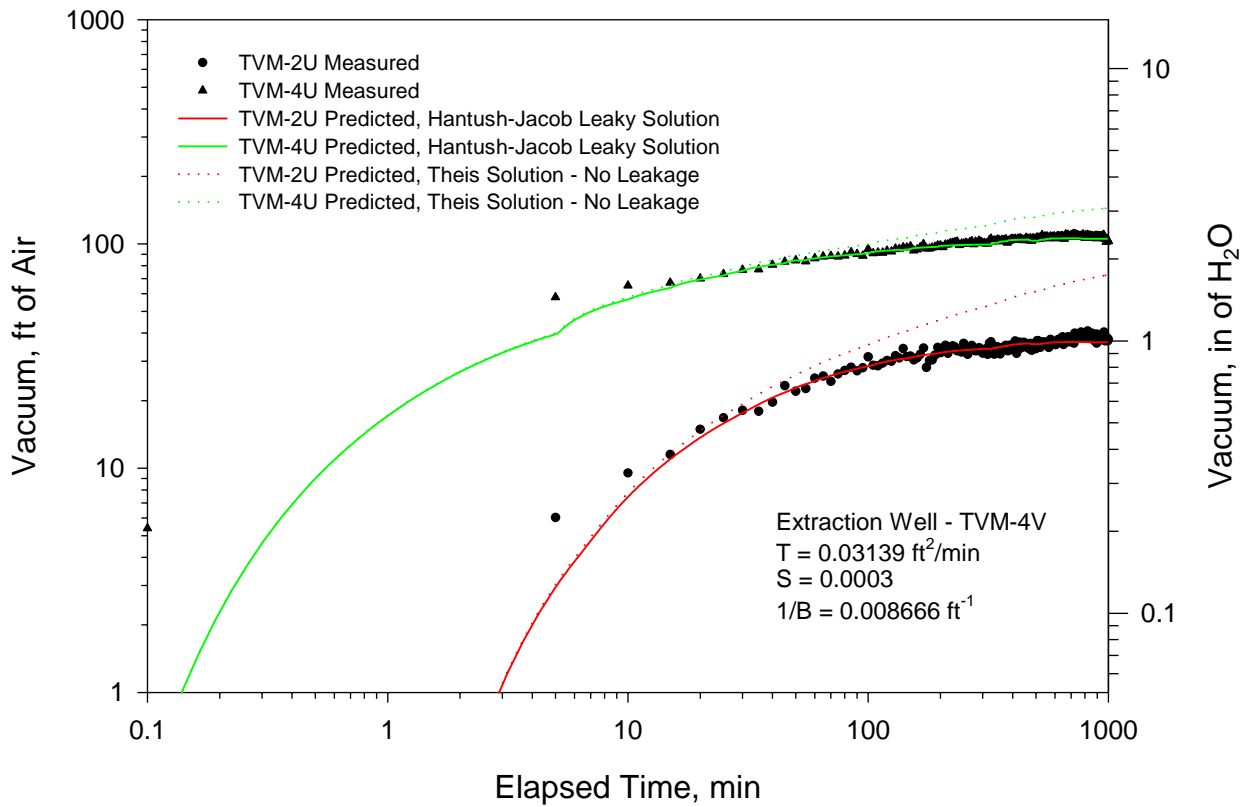


Figure 4: Results from a vadose zone pumping test performed at TNX

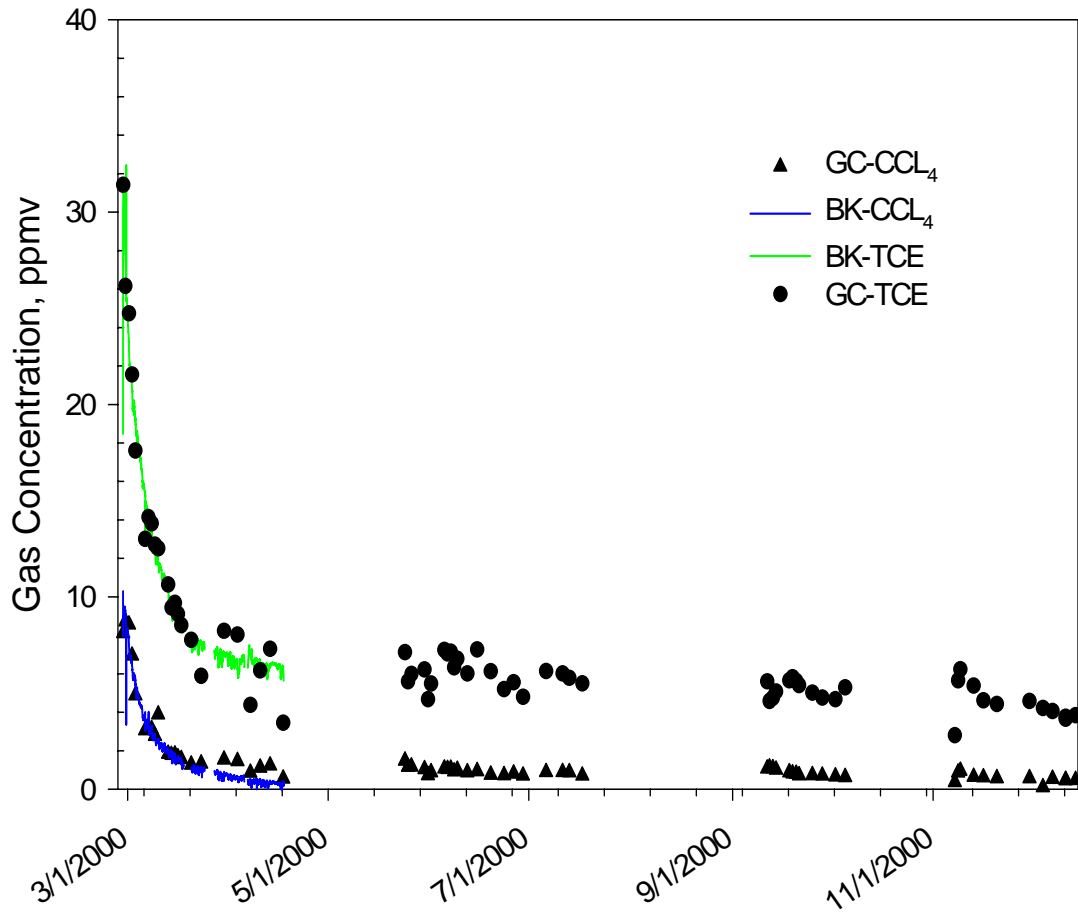


Figure 5: Results from real-time sensor (B&K) and grab samples from SVE emissions

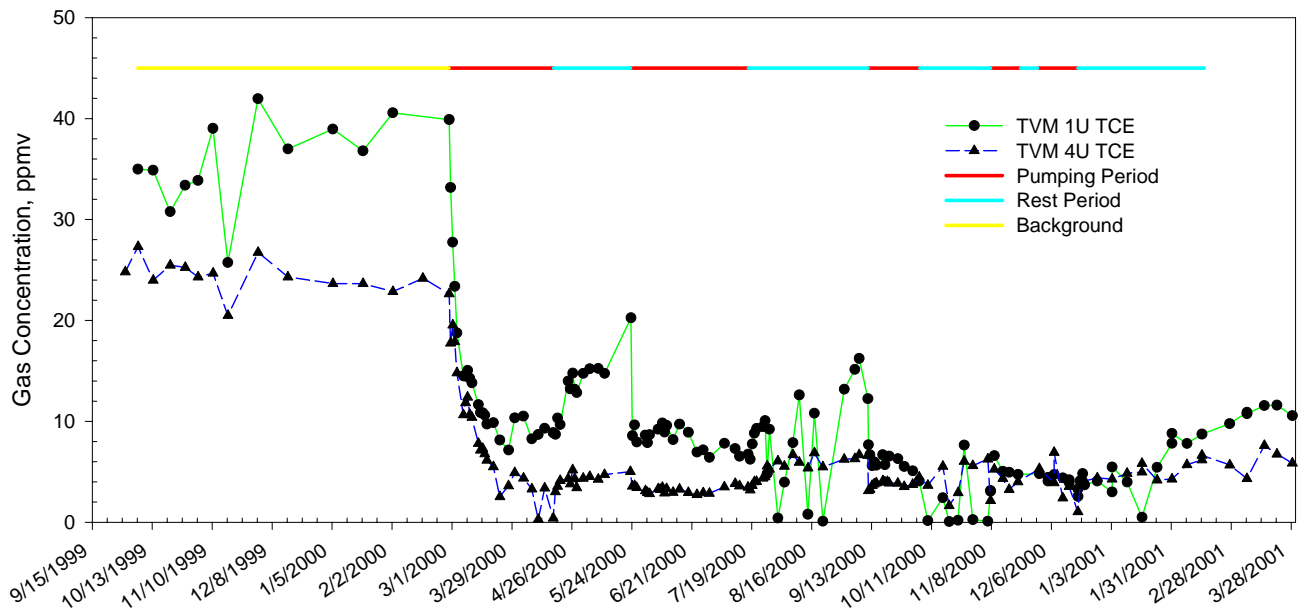


Figure 6: Rebound test results for TCE in SVE well TVM-1U and TVM-4U

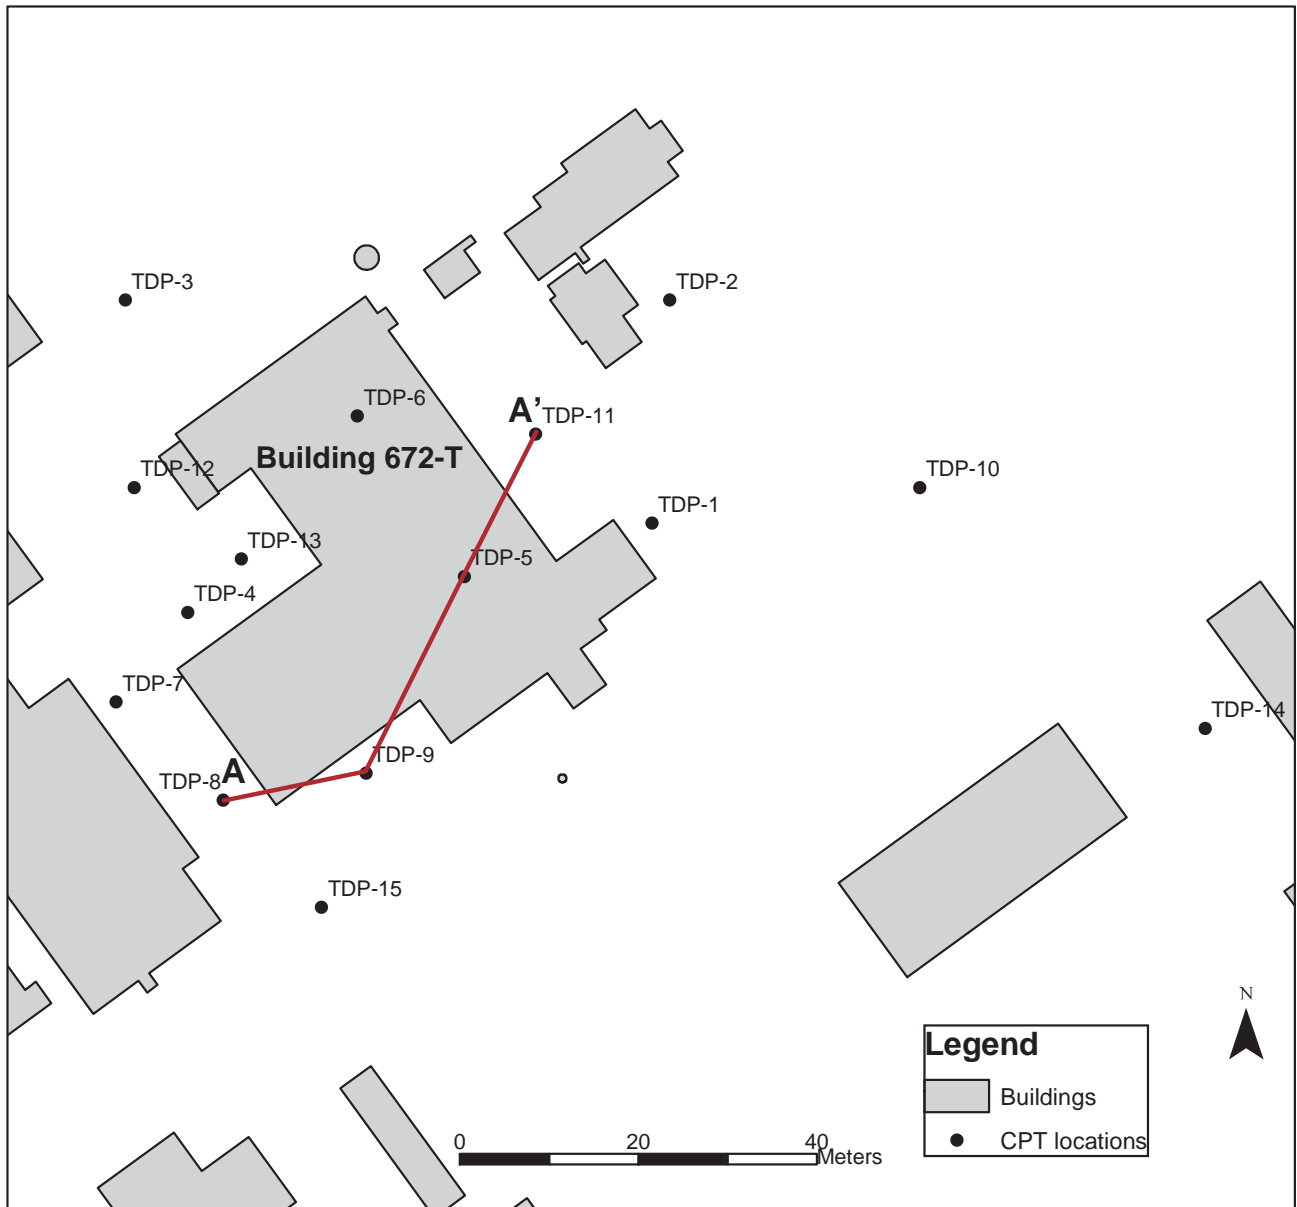


Figure 7: CPT Soil Gas Locations and cross-sections A-A'

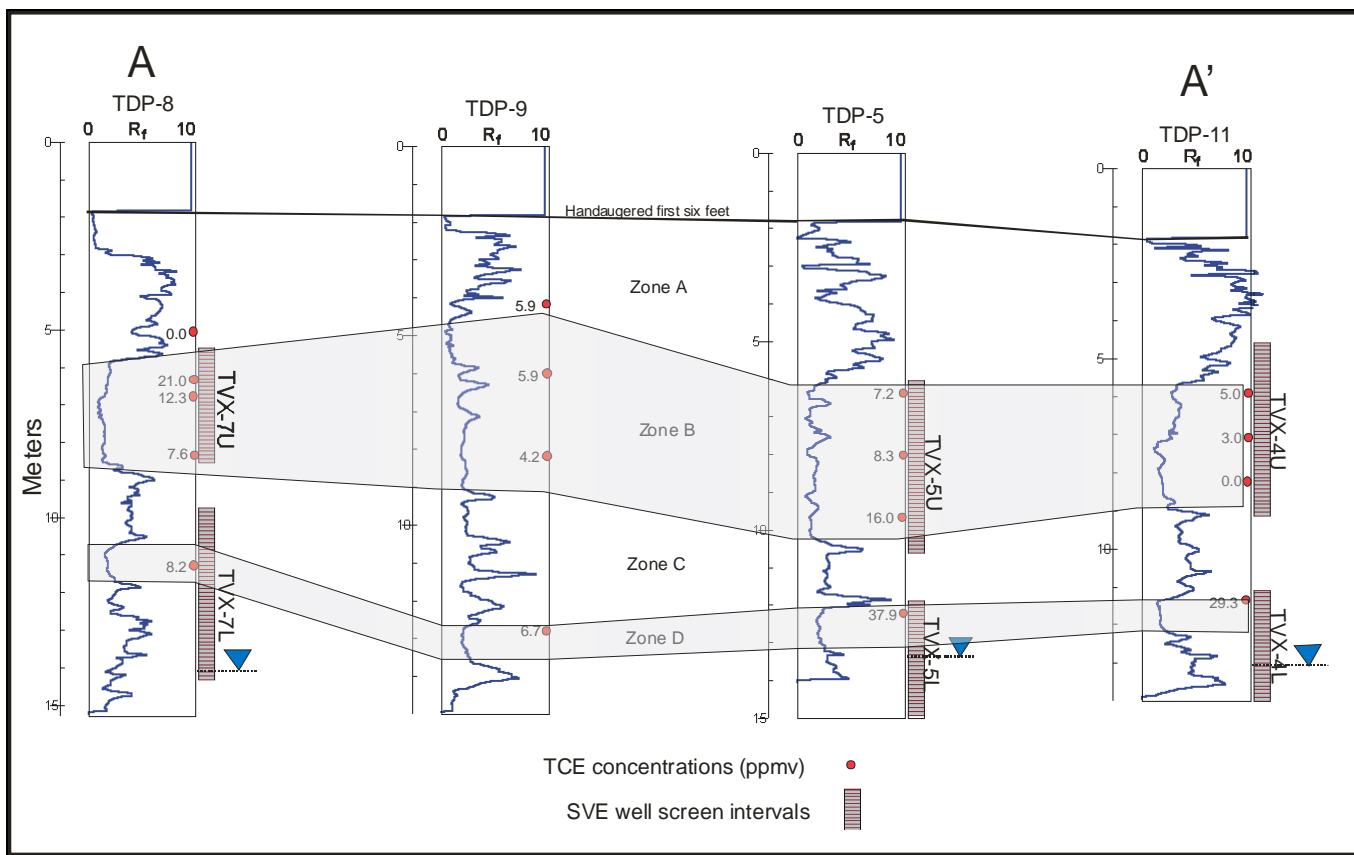


Figure 8: Cross-section A-A' with CPT soil gas TCE results and SVE screen zones

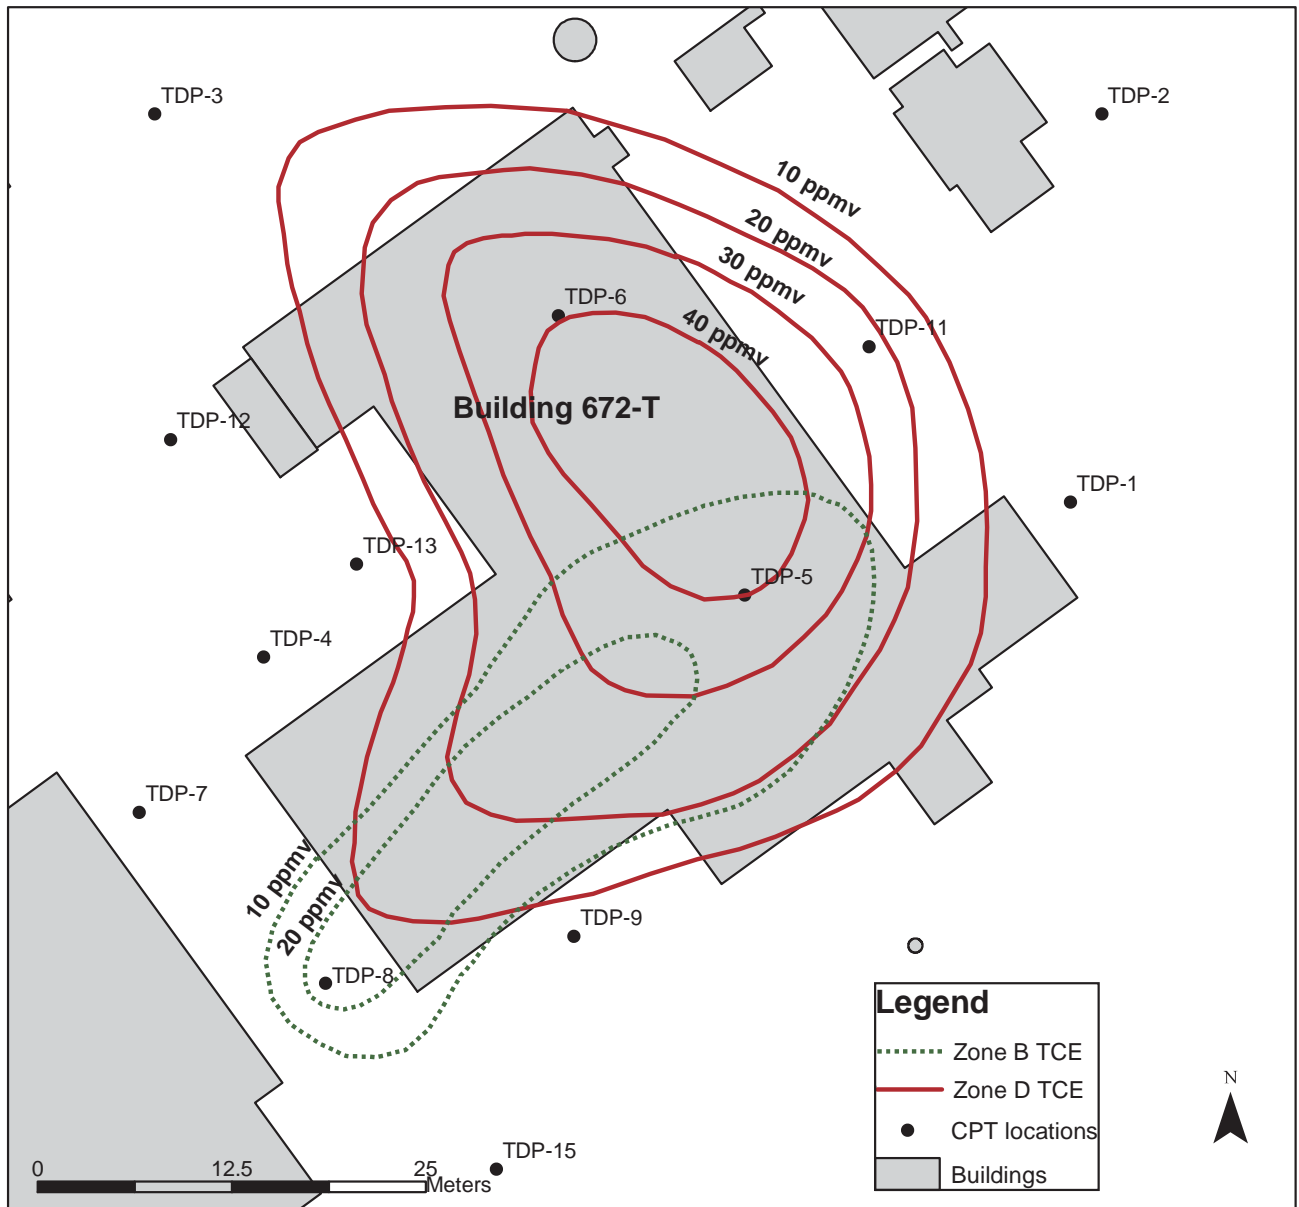


Figure 9: TCE Concentration Contour Map

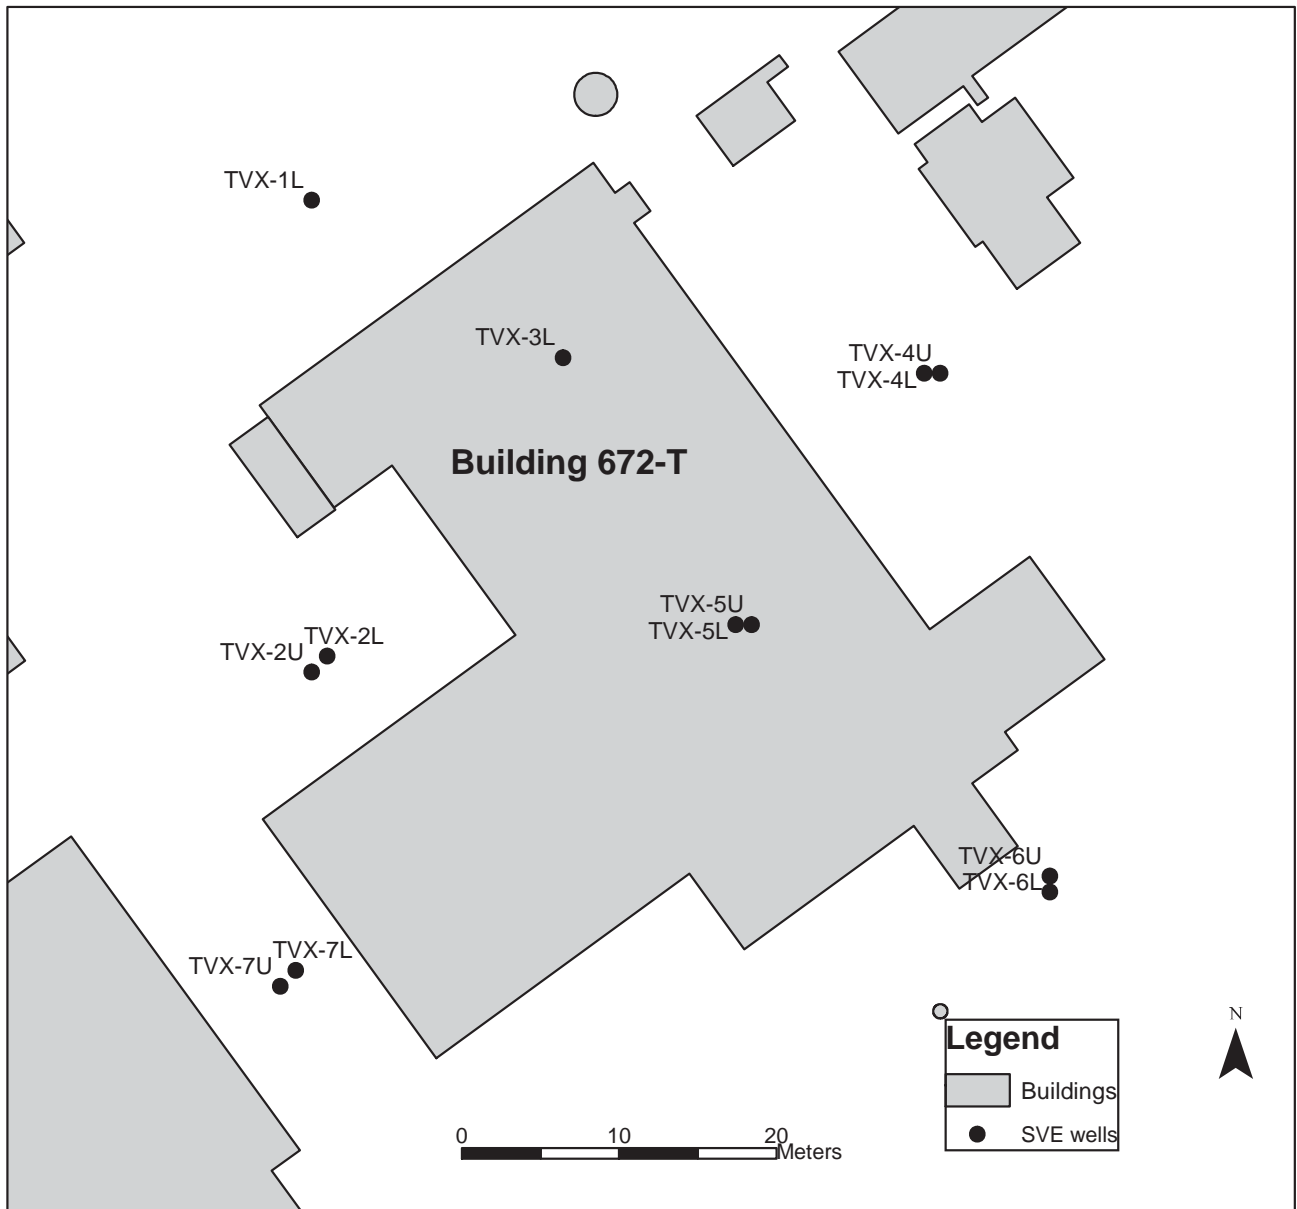


Figure 10: Soil Vapor Extraction Wells



**Figure 11: Shutter (Louver) screen used for SVE wells to prevent clogging and smearing during installation**



SVE well	flow rate (slpm)	vacuum (mm Hg)	specific capacity (slpm/ mm Hg)	TCE (ppmv)	CCl <sub>4</sub> (ppmv)	PCE (ppmv)	CHCl <sub>3</sub> (ppmv)	C-DCE (ppmv)
TVX-1L	620.1	276.1	2.2	0.8	<0.1	<0.1	<0.1	<0.1
TVX-2L	1500.8	213.4	7.0	1.4	0.1	0.4	<0.1	<0.1
TVX-2U	1424.3	123.0	11.6	0.5	0.1	0.1	<0.1	<0.1
TVX-3L	147.2	288.7	0.5	6.9	<0.1	<0.1	<0.1	<0.1
TVX-4L	407.8	293.7	1.4	10.8	<0.1	<0.1	<0.1	<0.1
TVX-4U	1925.5	208.3	9.2	2.3	<0.1	0.0	<0.1	<0.1
TVX-5L	192.6	281.1	0.7	8.4	<0.1	0.7	<0.1	2.0
TVX-5U	3284.8	90.4	36.4	1.8	0.1	<0.1	<0.1	<0.1
TVX-6L	218.0	326.3	0.7	6.2	<0.1	<0.1	<0.1	<0.1
TVX-6U	2373.0	125.5	18.9	0.2	<0.1	<0.1	<0.1	<0.1
TVX-7L	8.5	288.7	<0.1	62.5	27.7	0.6	1.6	19.1
TVX-7U	3502.8	110.4	31.7	1.9	0.2	0.2	<0.1	<0.1

**Table 1: Flow rate, vacuum, specific capacity and contaminant concentrations from baseline tests**

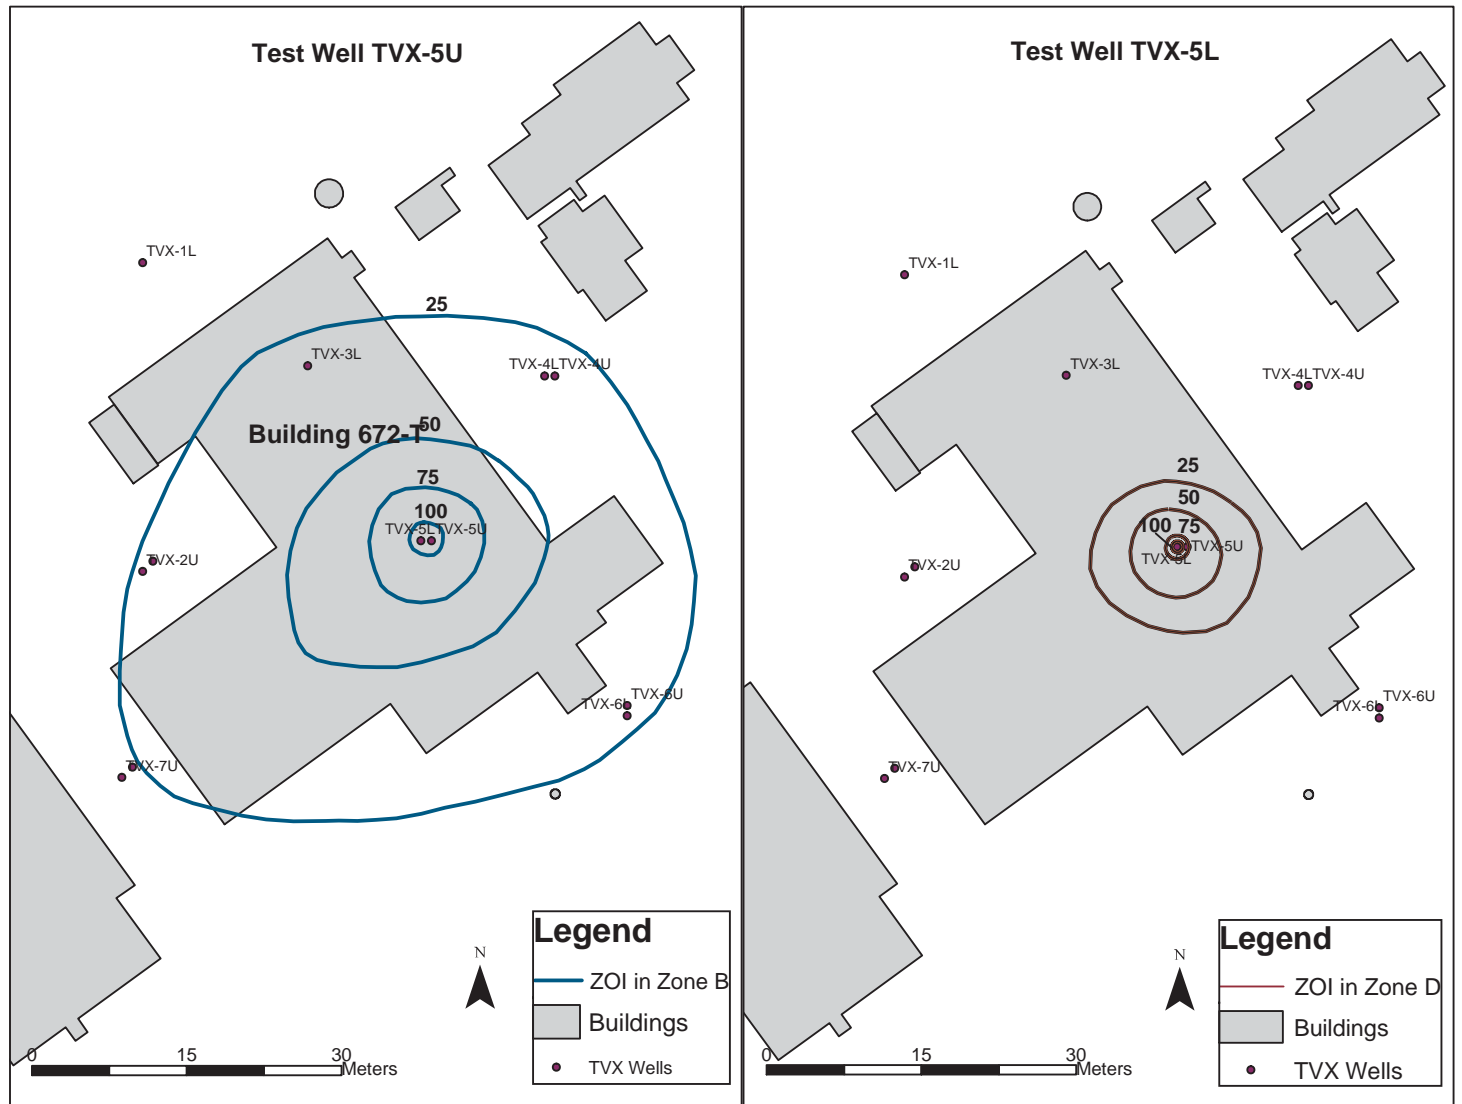


Figure 12: Contour Map of Vacuum during Baseline Test at TVX-5L and TVX-5U

Well Name	Test well TVX-7U	Test well TVX-7L	Test well TVX-5U	Test well TVX-5L	Test well TVX-3L	Test well TVX-1L	Test well TVX-2U	Test well TVX-2L	Test well TVX-6U	Test well TVX-6L	Test well TVX-4U	Test well TVX-4L
TVX-1L	16.99	*	19.86	2.16	3.25	test well	7.01	10.69	8.89	0.97	11.63	2.16
TVX-2L	29.85	*	27.13	2.64	3.18	5.59	12.93	test well	11.76	1.35	12.73	2.39
TVX-2U	31.60	*	26.82	2.62	3.15	5.59	test well	17.73	11.79	1.35	12.78	2.36
TVX-3L	19.48	*	28.17	2.90	test well	7.59	8.59	14.86	12.14	1.37	16.71	3.15
TVX-4L	-0.03	*	-0.18	-0.20	-0.03	-0.18	-0.10	-0.05	1.14	-0.91	0.15	test well
TVX-4U	16.84	*	30.10	2.95	3.15	4.75	6.17	8.92	15.19	1.68	test well	5.84
TVX-5L	23.80	*	41.00	test well	3.30	5.16	8.48	13.06	15.57	1.80	19.76	3.89
TVX-5U	24.18	*	test well	3.53	3.23	5.00	8.36	12.47	16.46	1.83	19.61	3.40
TVX-6L	19.38	*	28.12	2.64	2.92	4.11	5.97	9.83	19.71	test well	14.91	2.95
TVX-6U	19.91	*	27.10	2.46	2.82	3.84	5.51	8.99	test well	2.06	15.04	2.90
TVX-7L	-0.58	*	14.99	1.37	2.01	3.84	7.26	15.60	6.65	0.81	5.79	1.09
TVX-7U	test well	*	24.61	2.16	2.74	4.34	10.21	13.79	11.86	1.37	11.18	2.06

\* no vacuum measures were recorded

Table 2: Vacuum (cm H<sub>2</sub>O) recorded during baseline testing to determine Zone of Influence for each SVE well