



Workbook Tools for Calculating Soil and Ground Water Cleanup Levels under the Model Toxics Control Act Cleanup Regulation

User's Guide *For* *MTCATPH 11.0 & MTCASGL 11.0*

Washington State Department of Ecology
Toxics Cleanup Program

Revised August 2006

Publication No. 01-09-073

Printed on Recycled Paper ♻️

***If you have special accommodation needs, please contact the Toxics Cleanup Program
at (360) 407-7170 (voice), 711 or 1-800-833-6388 (TTY).***

This Guidance is available on the Department of Ecology's website at:

<http://www.ecy.wa.gov/programs/tcp/tools/toolmain.html>

For additional copies of this publication, please contact:

**Department of Ecology
Publications Distribution Office
P.O. Box 47600
Olympia, WA 98504-7600
(360) 407-7472**

**Refer to Publication No. 01-09-073
Revised August 2006**

Questions or Comments regarding Workbook Tools (MTCASGL 11.0 and MTCATPH 11.0) and User's Guide should be addressed to:

Hun Seak Park
Washington State Department of Ecology
Toxics Cleanup Program
PO Box 47600
Olympia, WA 98504-7600

Disclaimer: This User's Guide and associated programs are provided "AS IS" and without warranties as to performance or any other warranties of any kind whether expressed or implied. The user assumes the entire risk of using this User's Guide and associated programs. In no event shall the State of Washington and all parties associated with the preparation of this manual be liable for damages or losses of any nature or kind, including but not limited to any compensatory, direct, special, incidental, indirect, or consequential damages whatsoever including, without limitation, damages for injuries to persons or property, loss of business profits, business interruption, loss of business information, or any other pecuniary or non-pecuniary loss arising out of or relating to the use of or inability to use this manual and associated software, even if the State of Washington and associated parties have been advised or are aware of the possibility of such damages. This manual and associated software are not intended, and cannot be relied on, to create rights, substantive or procedural, enforceable by any party in litigation with the State of Washington. Ecology reserves the right to act at variance with this User's Guide or associated software at any time.

Table of Contents

List of Figures	iii
List of Tables	iv
List of Acronyms and Abbreviations	v
 Chapter 1 Introduction	 1
1.1 Purpose of the Workbook Tools	1
1.2 Caution on Use of the Workbooks	3
1.2.1 Calculation of Soil Cleanup Levels	3
1.2.2 Calculation of Potable Ground Water Cleanup Levels	3
1.3 Overview of Files	4
1.3.1 ZIP Archive File Download	4
1.3.2 Hardware and Software Requirements to run the Workbooks	4
1.4 Getting Started	5
1.4.1 Installing the Workbooks	5
1.4.2 Assessing the Worksheet and Opening the title Screen	6
1.5 Common Error Messages and Troubleshooting/Operating Tips	7
1.6 Saving and Closing the Workbook	12
 Chapter 2 MTCASGL – Workbook for Calculating Cleanup Levels for Individual Hazardous Substances	 13
2.1 Overview	13
2.2 What's New on MTCASGL 11 (Version 11)?	14
2.3 Calculating Soil Cleanup Levels (Soil Worksheet)	15
2.3.1 Accessing the Soil Worksheet	15
2.3.2 Caution on Use of the Soil Worksheet	15
2.3.3 Equations and Parameters	16
2.3.4 Entering Data for Input Parameters	17
2.3.5 Output – Interpreting the Result	27
2.3.6 Output – Adjustment of Result	31
2.4 Calculating Potable Ground Water Cleanup Levels (Ground Water Worksheet)	31
2.4.1 Accessing the Ground Water Worksheet	31
2.4.2 Caution on Use of the Ground Water Worksheet	31
2.4.3 Equations and Parameters	32
2.4.4 User Input – Soil and Ground Water Worksheets	32
2.4.5 Output – Interpreting the Result	34
2.4.6 Output – Adjustment of Result	34
2.4.7 Output – Transfer of Adjusted Result to Soil Worksheet	34
 Chapter 3 MTCATPH – Workbook for Calculating Cleanup Levels for a Petroleum Mixture	 35
3.1 Overview	35
3.2 Prerequisites for Use	35
3.3 Restrictions and Cautions on Use	36
3.3.1 Calculating Soil Cleanup Levels	36

3.3.2	Calculating Ground Water Cleanup Levels	37
3.4	What's New on MTCATPH 11 (Version 11)?	38
3.5	Overview of Equations and Parameters	39
3.5.1	Calculating Soil Cleanup Levels	39
3.5.2	Calculating Ground Water Cleanup Levels	41
3.6	Navigating the Workbook and Visual Organization of the Workbook Interface ..	42
3.7	Calculating Soil TPH Cleanup Levels	44
3.7.1	Quick Instruction on How to Calculate the Soil TPH Cleanup Levels.....	44
3.7.2	Entering Data – Input A1	45
3.7.3	Executing the Calculation and Analyzing the Output (Calculation Summary Table)	50
3.7.4	Advanced Features (Optional)	52
3.7.5	Output-Adjusting the Results (Optional)	63
3.8	Calculating Ground Water TPH Cleanup Levels.....	64
3.8.1	Quick Instruction on How to Calculate the Ground Water TPH Cleanup Levels	64
3.8.2	Entering Data- Input	64
3.8.3	Executing the Calculation and Analyzing the Output.....	66
3.8.4	Output-Adjusting the Results.....	69

Appendices

Appendix A – Equations and Default Values for Calculating Potable Ground Water Cleanup Levels

Appendix B – Equations and Default Values for Calculating Soil Cleanup Levels based on the Direct Contact Pathway

Appendix C – Equations and Default Values for Calculating Soil Cleanup Levels based on the Leaching Pathway (Protection of Ground Water)

Appendix D – Equations and Default Values for Calculating Air Cleanup Levels

Appendix E – Primer on TPH Fractions and Analytical Requirements for TPH Mixtures

Appendix F – Revised Properties of Chemicals commonly found at Petroleum Contaminated Sites.

List of Figures

Figure 1-1 Opening Title Screen of MTCASGL	6
Figure 1-2 Opening Title Screen of MTCATPH	7
Figure 1-3 De-linking Error Message	7
Figure 1-4 Add-in Features	8
Figure 1-5 Compile Error Message	8
Figure 1-6 Locating Solver Built-In Function	10
Figure 2-1 Examples of Footnotes	14
Figure 2-2 General Information	18
Figure 2-3 Toxicological Properties	19
Figure 2-4 Exposure Parameters	19
Figure 2-5 Physical and Chemical Properties	21
Figure 2-6 Target Ground Water Cleanup Level	23
Figure 2-7 Site-specific Hydrological Information	24
Figure 2-8 Vapor Attenuation Factor	26
Figure 2-9 Example: Method B Ground Water Cleanup Levels	33
Figure 3-1 Overview of MTCATPH Interface (Navigator)	42
Figure 3-2 Quick Calculation Instruction for Soil TPH Cleanup Levels	44
Figure 3-3 Site Information	45
Figure 3-4 Entering Soil Concentration Measured	46
Figure 3-5 Entering Site-specific Hydrological Data	47
Figure 3-6 Entering Target TPH Ground Water Concentration	49
Figure 3-7 Notes for Data Entry	50
Figure 3-8 Calculating with New Data Entered	50
Figure 3-9 Test Current Condition Box	53
Figure 3-10 Calculate Protective Condition Box	54
Figure 3-11 Floating Calculation Buttons	55
Figure 3-12 Test Adjusted Condition Box	55
Figure 3-13 Dialogue Box for Entering Soil TPH Concentration	56
Figure 3-14 Buttons for Soil Quality Criteria for Method C	56
Figure 3-15 Protective Condition or Testing Box	58
Figure 3-16 Floating Buttons for Soil-to-Ground Water Exposure Pathway	58
Figure 3-17 Model Results	60
Figure 3-18 Soil Vs. Ground Water Concentration Predicted for TPH	60
Figure 3-19 Soil Vs. Ground Water Concentration Predicted for each Component	61
Figure 3-20 TPH Mass Distribution in Soil Matrix	61
Figure 3-21 Mass Balance Navigator	62
Figure 3-22 Mass Distribution of Individual Component in Soil Matrix	62
Figure 3-23 Quick Instruction for Calculating TPH Ground Water Cleanup Levels	64
Figure 3-24 Entering Site Information	64
Figure 3-25 Entering Ground Water Concentration Measured	65
Figure 3-26 Testing Current Condition Box	66
Figure 3-27 Calculate Protective Condition Box	67
Figure 3-28 Floating Buttons for Calculating Protective Ground Water TPH	68
Figure 3-29 Test Adjusted Condition Box	69

List of Tables

Table 1-1 Description of Workbooks	4
Table 2-1 Porosity and Density Information	24
Table 2-2 Calculation Summary Table	28
Table 2-3 Summary of Calculation for Each Exposure Pathway	29
Table 3-1 Method B Equations	40
Table 3-2 Method C Equations	40
Table 3-3 Equivalent Carbon Numbers	47
Table 3-4 Porosity Calculation	48
Table 3-5 Summary of Calculation Results for Soil TPH	51

List of Acronyms and Abbreviations used in the MS Excel® Workbooks and This User's Guide

AL_EC	Aliphatic Equivalent Carbon number
AR_EC	Aromatic Equivalent Carbon number
BTEX	Benzene, Toluene, Ethylbenzene, and Xylenes
CLARC	Ecology, <i>Cleanup Levels and Risk Calculations under the Model Toxics Control Act Cleanup Regulation</i> ; Refer to Ecology's interactive web site at https://fortress.wa.gov/ecy/clarc/CLARCHome.aspx .
Conc	Concentration
cPAHs	Carcinogenic Polycyclic Aromatic Hydrocarbons
EC	Equivalent Carbon number
Ecology	Washington State Department of Ecology
EPA	U.S. Environmental Protection Agency
GW	Ground Water
HI	Hazard Index
HQ	Hazard Quotient
MCL	Maximum Contaminant Level
mg/kg	milligrams per kilogram for soil media sample (same as part per million: ppm)
MTCA	Model Toxics Control Act
MW	Molecular Weight
NA	Not Applicable
NAPL	Nonaqueous Phase Liquid
PQL	Practical Quantitation Limit
RISK	Carcinogenic Risk
TPH	Total Petroleum Hydrocarbon
µg/L	micrograms per liter for ground water media sample (same as parts per billion ppb)
WAC	Washington Administrative Code
100% NAPL	TPH concentration at which air-filled pore volume is completely filled by equilibrated NAPL. This concentration is usually well above Residual Saturation Level

See Appendices "A" through "F" for definitions of the parameter abbreviations found in the equations.

Chapter 1 Introduction

1.1 Purpose of the Workbook Tools

The purpose of this User's Guide is to introduce the user to the features of two Workbooks (MTCATPH and MTCASGL) for calculating Soil and Ground Water Cleanup Levels. This guide is arranged as a set of tutorials that allow the user to learn the basics of Workbooks in a "hands-on" environment.

The Model Toxics Control Act (MTCA) Cleanup Regulation, chapter 173-340 WAC, sets forth the requirements and procedures for establishing cleanup levels that are protective of human health and the environment. The Workbooks described in this User's Guide provide tools for the calculation of Method B and Method C cleanup levels for soil and ground water based on protection of human health.

The regulation provides for the establishment of both **standard** and **modified** Methods B and C cleanup levels.

- Under **standard** Methods B and C, protective concentrations are calculated using standard equations and default assumptions provided in the regulation. Except for petroleum mixtures, protective concentrations calculated for hazardous substances under standard Methods B and C are published in **CLARC**. One of the **Workbooks** described in this User's Guide provides the necessary tools for calculating protective soil and ground water concentrations under **standard** Method B or Method C for petroleum mixtures.
- Under **modified** Methods B and C, specified default assumptions may be adjusted based on site-specific or chemical-specific data. The regulation specifically describes which parameters may be adjusted and how they may be adjusted. The **Workbooks** described in this User's Guide provide the necessary tools for calculating protective soil and ground water concentrations under **modified** Method B or Method C.

For the calculation of **soil cleanup levels**, the Workbooks provide tools for evaluating the direct contact pathway, the leaching pathway (protection of ground water), and the vapor pathway (protection of air quality).

- For the evaluation of the **direct contact pathway**, the Workbooks use the equations provided in the regulation. The Workbooks allow the user to evaluate the soil ingestion pathway alone or in conjunction with the dermal pathway.
- For the evaluation of the **leaching pathway**, the Workbooks use the 3-phase and 4-phase equilibrium partitioning models described in the regulation to calculate a soil cleanup level that will not cause an exceedance of the ground water cleanup level established under WAC 173-340-720.

- For the evaluation of the **vapor pathway**, the Workbooks provide **informational** tools for calculating air cleanup levels and soil concentrations that will not cause an exceedance of the air cleanup level established under WAC 173-340-750.

NOTE: The tools for evaluating the vapor pathway are provided for informational purposes only. Please consult the regulation and the site manager for more information regarding whether the pathway must be evaluated and how the pathway may be evaluated.

For the calculation of **ground water cleanup levels**, the Workbooks provide tools for calculating only potable ground water cleanup levels, as defined in the regulation.

When establishing cleanup levels for hazardous substances at a site, the site manager often asks **two types of questions**:

- Is the measured (or current) concentration at the site protective?
- If not, what is the protective concentration?

The Workbooks allow the user to answer both of these questions. The Workbooks provide the tools to calculate the risk under current site conditions (forward calculation) and to calculate protective concentrations (backward calculation) if the measured concentrations at the site are not protective. In the first instance, the Workbooks require the user to enter measured soil or ground water concentrations. The Workbooks then execute a "forward" calculation using the equations in the regulation and solving for risk. In the second instance, the Workbooks "back-calculate" a protective concentration based on the target risk levels set forth in the regulation. Also, the Workbooks provide printing and previewing capabilities for all input and output screens.

This User's Guide describes the capabilities and limitations of the Workbooks and provides step-by-step instructions for installing and using the Workbooks.

This information is provided to document the methods used by the Department to develop concentrations that meet the acceptable risk levels required by The Model Toxics Control Act (MTCA) Cleanup Regulation, chapter 173-340 WAC.

Note: *This User's Guide document replaces the Department's August, 2001 document entitled "Workbook Tools for Calculating Soil and Ground Water Cleanup Levels under the Model Toxics Control Act Cleanup Regulation: User's Guide; Publication No. 01-09-073."*

1.2 Caution on Use of the Workbooks

The requirements and procedures for establishing cleanup levels that are protective of human health and the environment are specified in the MTCA Cleanup Regulation, chapter 173-340 WAC. The use of this User's Guide and the associated programs may not be sufficient to establish cleanup levels under the regulation. The Workbooks are merely computational tools and do not provide all the information necessary to establish cleanup levels for a site. Appropriate background, training, and experience are necessary to accurately use the Workbooks.

1.2.1 Calculation of Soil Cleanup Levels

The **soil cleanup levels** calculated using the Workbooks account for the following:

- Concentrations based on protection of human health (direct contact pathway);
- Concentrations based on protection of ground water (leaching pathway);
- Natural background concentrations; or
- Practical quantitation limits.

The **soil cleanup levels** calculated using the Workbooks **DO NOT** account for the following:

- Concentrations established under applicable state and federal laws;
- Concentrations based on protection of air (vapor pathway);
- Concentrations based on protection of terrestrial ecological receptors;
- Residual saturation limit for protection of ground water; and
- Total site risk.

The soil cleanup levels calculated using the Workbooks might need to be manually adjusted to account for these considerations.

1.2.2 Calculation of Potable Ground Water Cleanup Levels

The potable ground water cleanup levels calculated using the Workbooks account for the following:

- Concentrations established under applicable state and federal laws;
- Concentrations based on protection of human health;
- Natural background concentrations; and
- Practical quantitation limits.

The potable ground water cleanup levels calculated using the Workbooks **DO NOT** account for the following:

- Concentrations based on potential surface water impacts;

- Nonaqueous phase liquid (NAPL) limitation; and
- Total site risk.

The ground water cleanup levels calculated using the Workbooks might need to be manually adjusted to account for these considerations.

1.3 Overview of Files

1.3.1 ZIP Archive File Download

The zip archive file (*MTCACALC11.exe*) contains two MS Excel® files (2003 version) format and one MS Word® file (2003 version) format. This manual provides instructions on the use of the following two Microsoft Excel® Workbook files described below in Table 1-1. This zip archive file may be obtained by:

- Contacting Ecology (360-407-7224; cesg461@ecy.wa.gov) to obtain a compact disk (CD) containing the files; or
- Downloading the files from Ecology's Internet web site: <http://www.ecy.wa.gov/programs/tcp/tools/toolmain.html>

Table 1-1 Description of Workbooks

File Name	File Size (MB)	Version	Description
<i>MTCASGL11.xls</i>	0.2	11.0	Workbook for Calculating Cleanup Levels for Individual Hazardous Substances
<i>MTCATPH11.xls</i>	1.8	11.0	Workbook for Calculating Cleanup Levels for Petroleum (TPH) Mixtures

1.3.2 Hardware and Software Requirements to run the Workbooks

This section describes the required (or recommended) hardware and software for using the Workbooks. Any hardware capable of operating MS Excel® (version 2003 SP2) will run the Workbooks. A math coprocessor is not required, but is recommended. Modern processors may have the coprocessor included. Please note you can check your hardware configuration if you are using MS Windows® by “right-clicking” on “my computer” on the windows desktop and selecting “system information.” Some Workbook routines require intensive numeric processing best handled by hardware with greater amounts of Random Access Memory (RAM) and Pentium-level processors. Additional **hardware** recommendations include:

- A CD-ROM drive, if you have received the Workbook on CD;
- A hard disk drive with at least 40 MB of free disk space;
- A minimum of 64 megabytes of system memory (RAM);
- 486 DX or higher processor running at 66 MHz or faster;

- Any monitor supported by Windows, with video graphics array (VGA) or better resolution; and
- An 800 x 600 or higher monitor resolution.

Recommended software needed to run the Workbook and associated functions is MS Excel® version 2003 (or XP version) for Windows. However, MS Excel® 2000 or earlier should be compatible with the Workbooks. The software is implemented as an MS Excel® Workbook, programmed in Visual Basic® and Visual Basic for Applications® (VBA), and requires MS Excel®. Both Workbooks use automatic procedures programmed in MS Visual Basic®. However, it should not be necessary to have Visual Basic® installed on your particular system to operate the Workbook.

Visual Basic® routines included in the Workbook make references or “calls” to library or add-in functions that may or may not be installed on your particular computer or activated in your current MS Excel® application. Even if these elements are installed, the Visual Basic® routines need to be edited to provide the correct path for them. The Visual Basic® routine needs to know where they “are” on your particular computer’s hard drive or network. The discussion under Sections 1.4 and 1.5 below, describes how to check the status of these elements and make the appropriate modifications so that the Workbooks can run without encountering errors.

Note: Workbooks are offered for use without warranty or support. They are made to work with MS Excel® 2003 and may not work properly with other applications, or with early versions of MS Excel®. It is recommended that you have no other files open in Excel when using these Workbooks.

1.4 Getting Started

1.4.1 Installing the Workbooks

This section provides instructions for installing and opening the two Workbook files.

Once the Workbook is copied to your hard drive, several modifications and changes to your MS Excel® “add-in” components are required to allow the routines contained in the Workbook to operate correctly. To install the Workbook, follow these instructions:

1. Copy and save the Workbook file to the directory of choice.
2. Open Excel® and then open the file or simply double-click the Workbook icon as you would do with any other Excel® file.
3. Click “**YES**” if you are asked about enabling the MACRO.
4. Click “**Don’t Update**” when you are asked about updating links.
5. On the **Tools** menu, click **Add-Ins**. In the **Add-Ins available** box, select the check box next to “solver Add-In” and then click **OK**. If the add-in you want to use is not listed in the **Add-Ins available** box, click **Browse**, and then locate the add-in as explained in this section of this document.


6. Save a working file under a user-specified (different from original) name. Use the **END** button when closing the file.

*Note: Do not attempt to run the Workbooks without saving the files to your hard drive. It may cause the error messages as described below, or the Workbooks may not run properly. It is important to use the **END** button when closing the file. And it is good practice to save working files under a new name.*

1.4.2 Assessing the Worksheet and Opening the title Screen


Once the Workbook is successfully loaded into MS Excel®, the title sheet will appear. Be sure to enable the MACROS. To use the Workbooks, click on the **START** button (to exit, click on the **END** button). It is important to use the **END** button to exit the Workbook so your previous default MS Excel® settings (toolbars, work-area format) are restored. Selecting the **START** button makes the Navigator appear on your screen (light blue background). By opening MTCASGL11.xls, you will view Figure 1-1. At this point, you should see the following title screens as it appears below:

Figure 1-1 Opening Title Screen of MTCASGL

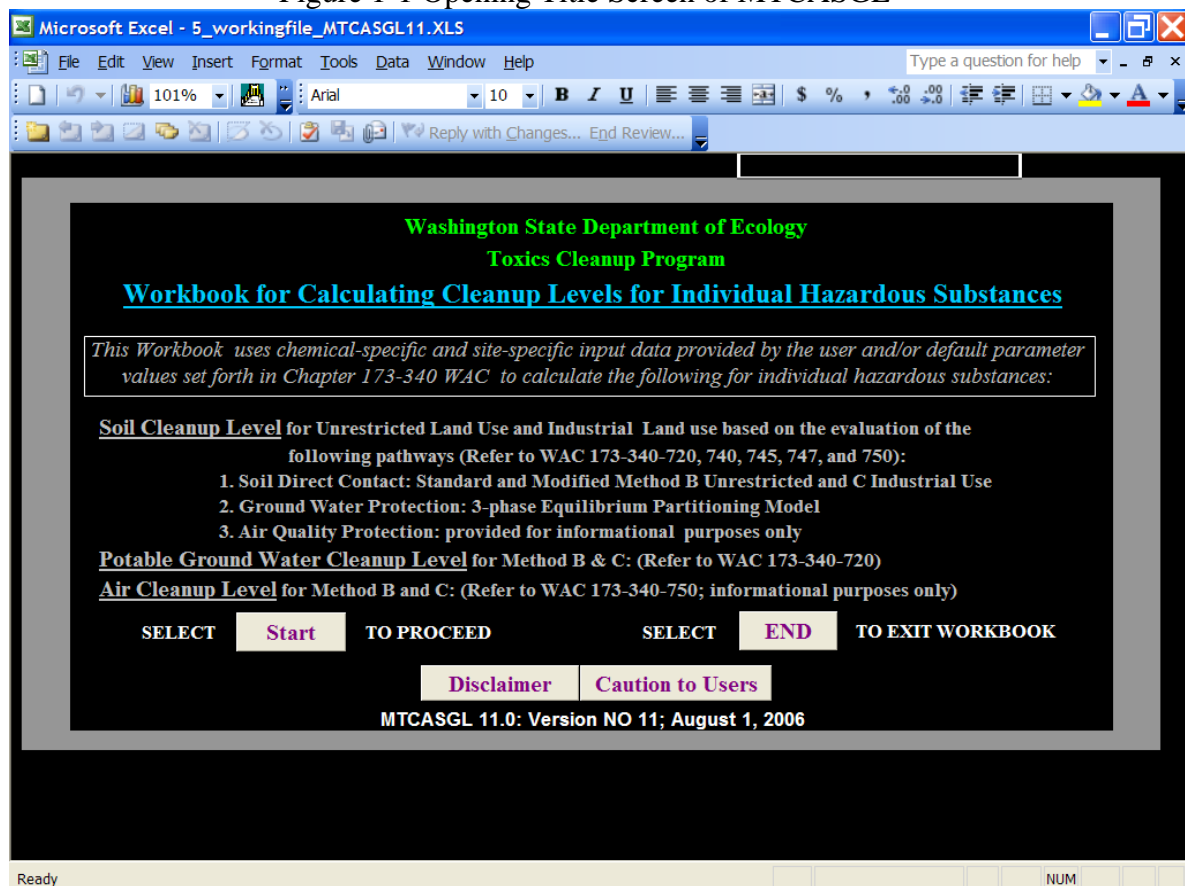

By opening MTCATPH11.xls, the user will view Figure 1-2.

Figure 1-2 Opening Title Screen of MTCATPH

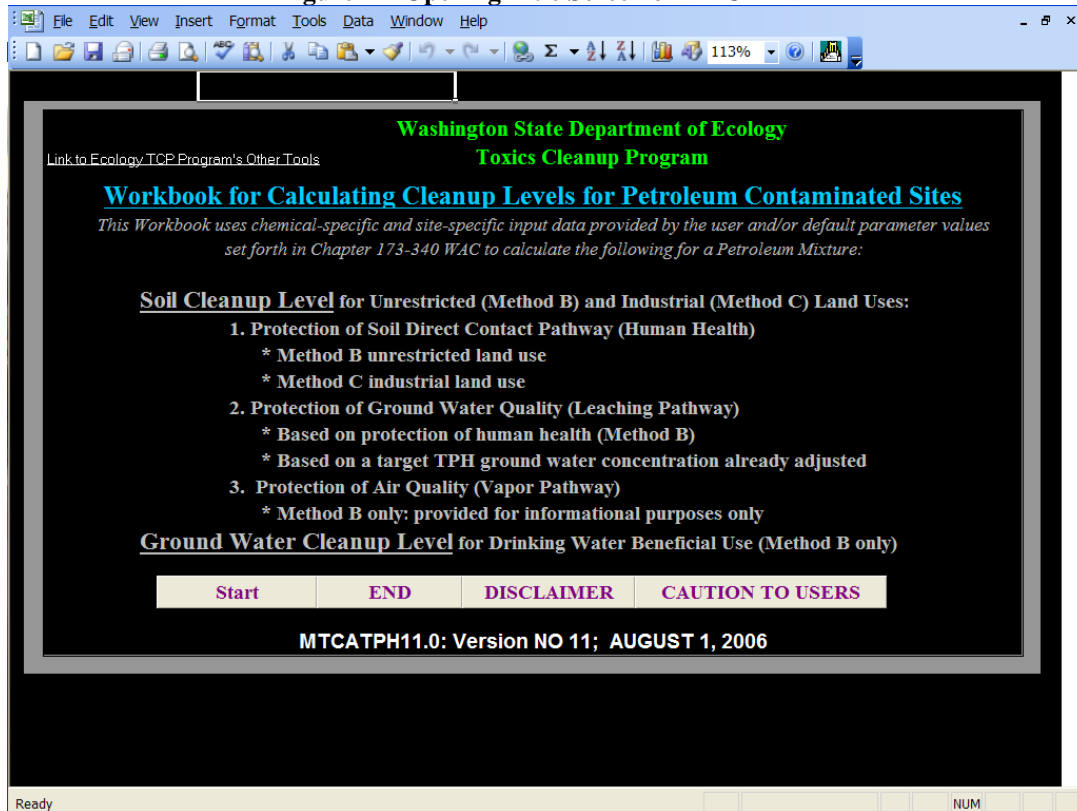

1.5 Common Error Messages and Troubleshooting/Operating Tips


Failing the “MTCATPH.xls” Workbook on the Ecology website link to run:

When the user clicks on the link (on the Ecology website) the document may not open up. The user should download the EXCEL Workbooks before trying to run them. To download a file the user should right-click on the link. This will bring up a menu. Then left-click on “Save Target As...” or “Save Link As...” After clicking on “Save”, the file will be downloaded onto your computer. The user should then close the browser and open the spreadsheet as the user would any other file on the computer.


Opening with error message “This Workbook contains links to other data source...” as shown or “#NAME?” is displayed in cell boxes:

The most common cause of this problem is that necessary “add-ins” components are not added properly. Follow installation instructions described in Figure 1-3:

Figure 1-3 De-linking Error Message

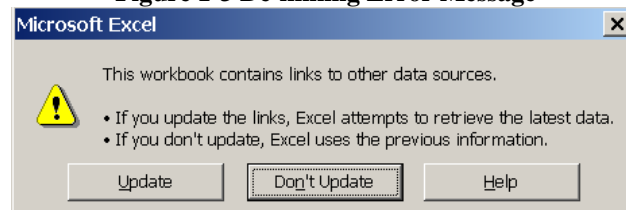


1. Click “**Don’t Update**” when you are asked about updating links.
2. On the **Tools** menu, click **Add-Ins**. In the **Add-Ins available** box, select the check box next to the add-in you want to load as shown to the right, and then click **OK**. If the add-in you want to use is not listed in the **Add-Ins available** box, click **Browse**, and then locate the add-in. If necessary, follow the instructions in the setup program. Or, you can reinstall an Excel® add-in by using the program that you used to install Excel®. See Figure 1-4.

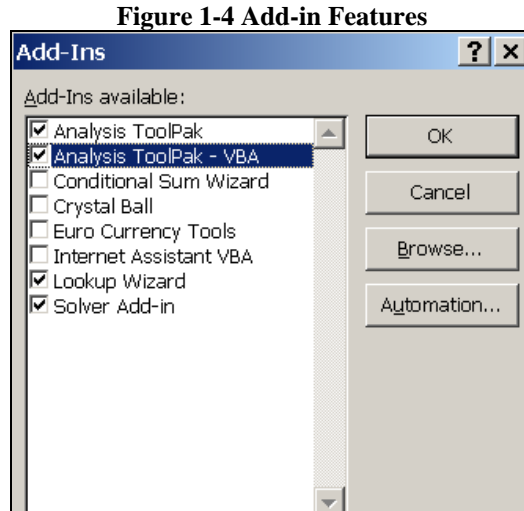

- *Analysis ToolPak*
- *Analysis ToolPak-VBA*
- *Lookup Wizard*
- *Solver Add-In*

Opening error message “Compile error: can’t find project or library” or not executing the calculation or compatibility problem with different versions of MS EXCEL:

The revised Workbook is developed for MS EXCEL 2003 because that was the version that Department was using at the time. Ecology has had mixed reports from outside users about their ability to use the Workbooks on older versions. How to resolve this problem is to exactly locate two built-in function files.

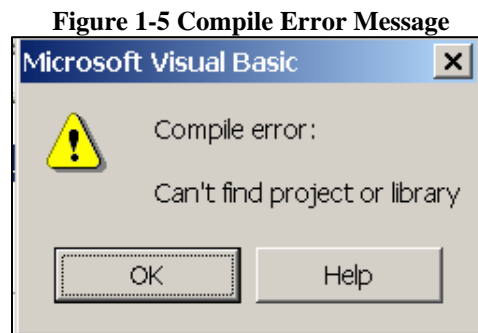

It is possible that MS Visual Basic® may open with an error window that states “**Compile error: Can’t find project or library**” as shown in Figure 1-5. If this is the case, it is likely that the Visual Basic® routines included in the Workbook cannot locate one or both of the following function files that need to be present on your computer’s hard drive to allow the Workbook to perform correctly:

- **LOOKUP.XLA**
- **SOLVER.XLA**

This usually is caused by not having the **Solver Add-in** open and loaded. It is the user’s responsibility to verify that these files are correctly loaded. To see if you have these files, use your file browser to search for them. See Figure 1-6. Usually, these files are located in the Library folder contained in the Office folder. The file “**SOLVER.XLA**” probably is contained in a folder called “**Solver**” within the library folder. If you don’t have these files, you may need to install one or both of them from your original MS Office® source disk. In order to establish a path to these files for the Workbook, you may need to do the following:

1. In Visual Basic® (with the error window showing), click on [OK] in the error dialogue window to close it.
2. Click on [Run] in the main toolbar and select [Reset].
3. Click on [Tools] in the main toolbar and select [References].


A list of available references with checkmarks will appear for the Workbook. Follow these instructions for each checked reference that is labeled as “MISSING” (you should repeat this procedure for each missing reference):

1. Highlight the file with your cursor (if it is not already highlighted).
2. Click on [Browse] at the right side of the dialog box.
3. Using the browser, locate the missing file (probably under Office/Library). Be sure to select “All Files” in the [Files of Type:]; scroll-down window so that all files in the particular folder will be displayed. If you still have trouble locating a particular file, you may right-click on “My Computer” on your desktop and select “Explorer” from the pop-up menu. Then fill in the appropriate file name to search for the location. To search for the missing file under MS Windows® 2000:
 - a) Click **Start**, point to **Search**, and then click **For Files or Folders**.
 - b) In **Search for files or folders named**, type all or parts of the missing file name you want to find.
 - c) In **Look in**, click the drive, folder, or network you want to search.
 - d) To specify additional search criteria, click **Search Options**, and then click one or more of the options to narrow your search.
 - e) Click Search Now.

If the file is not located, you may need to install it from the source disk or check with your PC administrator. In most cases, you may be able to find the file "**SOLVER.XLA**" located in the following folder:

- “C:\Program Files\Microsoft Office\Office11\Library\Solver” for MS Excel® 2003
- “C:\Program Files\Microsoft Office\Office10\Library\Solver” for MS Excel® XP & 2002
- “C:\Program Files\Microsoft Office\Office\Library\Solver” for MS Excel® 97

Figure 1-6 Locating Solver Built-In Function

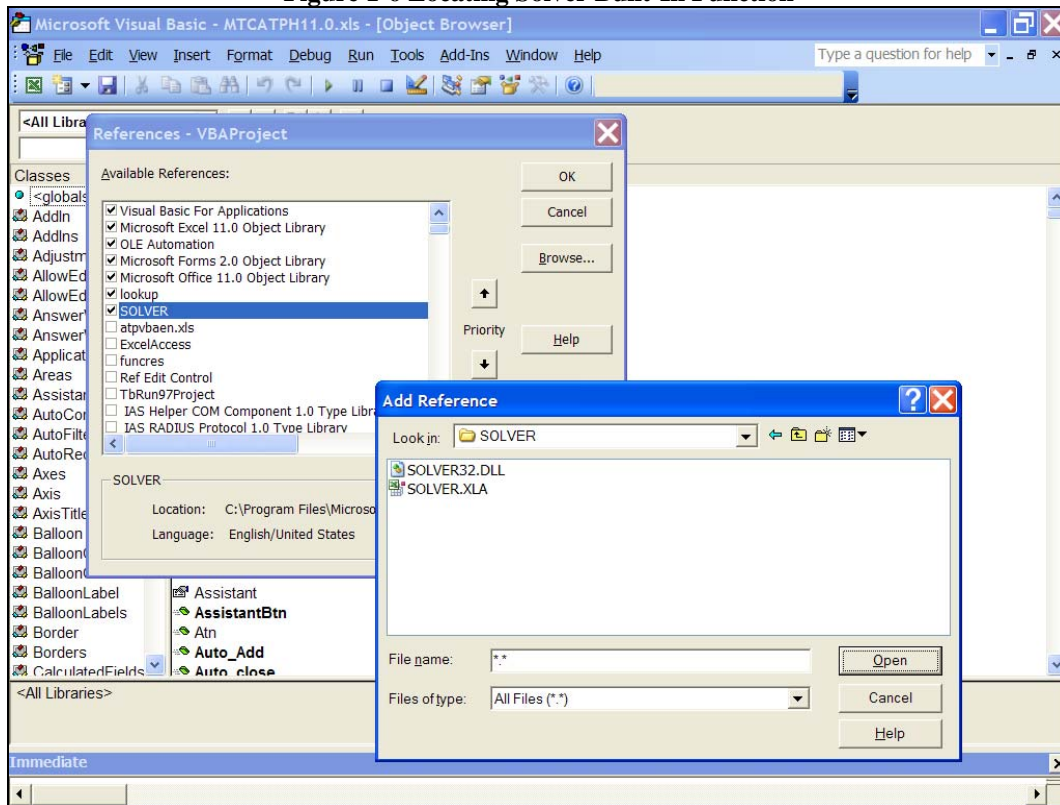

4. Once the file is located (be sure it's the one with the "**xla**" extension), click on it (highlight it) and then click on the [Open] button. The window should return to the "Available References" list. The file should have a check-mark next to it. Repeat this process for each additional missing file.
5. Click [OK] to close the Available References window.
6. Click [File] in the main toolbar and select [Save]. Close Visual Basic® (this should return you to the MS Excel® Workbook). Save the corrected Visual Basic® Routines under a new file name if necessary. Installation is now complete. Check by closing the Workbook and re-opening in MS Excel®. It should open to the title sheet without any error messages.

Note: The macro within the Workbook that calls the subroutines operated upon by "SOLVER" and/or "LOOKUP" does not know where to look on the hard drive: it only "looks" in the

folder it is operating within, UNLESS the user establishes a path to these files for the Workbook. If the instruction given above does not work, please copy three MS Excel® files (SOLVER.XLA, SOLVER32.DLL, and LOOKUP.DLL or equivalent files for a different version of MS Excel® 2003) into the same folder that contains the downloaded Workbook.

“# # # #” is displayed in a number box:

Display properties chosen by users are not compatible with the cell format originally designed for the value (e.g., the number is too big to fit into the cell window). To fix this problem, select the cell, pull down the format menu, select “Cells” and click on the “Number” tab. Change either the format, length of column, or the font size of the cell until the value is visible.

“# DIV/0!” or “#NAME?” is displayed in a box:

The most common cause of this problem is that some input data are missing. Double-check to make certain that all of the input cells required for your run have data in them.

The buttons won’t work:

Click on another cell or hit the enter/return key, and then click the buttons and they should work.

Text labels appear to be cut off:

On some monitor resolutions in MS Windows® some cell labels may appear cut off. This should affect only the screen display, and in most cases, printouts should not be affected.

Other potential error messages and opening more than one Workbook at a time:

It is possible that you may receive other error messages when trying to open the Workbooks. Be sure the MACROS are activated in order to use the tools properly. Some error messages may require you to refer to online help or the documentation of the host application. Check with your network operator or information technology specialist to be sure your MS Excel® application can accept MACROS operation and to address other host application-related errors. It is not advisable to load and use more than one copy of the Workbook at the same time. It may cause it to function improperly.

Resizing and rescaling the graph:

Users can manually resize the graph or rescale (e.g., from or to normal to log scale) the axis to make it look more meaningful by double-clicking on the graph and resizing and rescaling it. Refer to the MS Excel® user’s manual.

Preview, printout (reporting features) and readability of worksheet:

The Workbooks provide printing and reviewing capabilities for all input/output screens. To view the printable worksheet, click on the “Preview” button at the top of any worksheet. Each worksheet can be printed by selecting the appropriate “Print” button. The same print options are available on the “Main Menu.” Some users may have difficulty viewing worksheet numbers or text. To enlarge your view of a particular sheet, click on “View” in the main toolbar and select “Zoom.” Choose a magnification that works best for your needs and save it as modified.

Input/output worksheet prints on one page for most computer/printer configurations. The worksheet is designed at “1024 x 768” pixel screen resolution, making it more readable on new computer configurations. For older systems with lower resolution, simply changing the screen “zoom” level to a higher percent (or more) instead of lower percent will improve readability.

Security and protection of worksheet:

The worksheets have been provided **unlocked** and **unprotected**. It therefore is critical that Ecology site managers are confident that the formulas used for calculations are accurate.

Restoring EXCEL tools bars and miscellaneous options:

In order to maximize screen area on the computer to view the data, most of the typical EXCEL toolbars are turned off when these Workbooks are loaded. However, if you prefer to have these toolbars available, you can restore them from EXCEL’s menu. Select “View/Formula Bar”, “View/Toolbars/Standard” and “View/Toolbars/Formatting” to return the typical toolbars. You can then resize the pages the percent box to make the tables and text larger or smaller. You can also use “Tools/Options/View/Row & Column Headers” to restore the standard row and column labels.

1.6 Saving and Closing the Workbook

—————→ **USE THE END BUTTON** ←————

Once an analysis is complete, it is good practice to print out a copy of the entire Workbook as a record. At this point, you may also wish to save the Workbook under a new name [FILE – SAVE AS]. If you accidentally exit without using the END button, you can re-establish your toolbars by clicking on [VIEW-TOOLBARS] and selecting the toolbars you wish to use. You may also need to click on [TOOLS-OPTIONS] and make selections as appropriate to re-establish certain work area components.

When you click on the END button, you will be prompted to save your work and you can do so by answering [yes] and saving the file under a new file name. Otherwise, answer [no] and you will exit the Workbook without saving any changes.

Note: The Workbook should be closed (exited) using the END button at the top of the sheet. Do not close the Workbook using the typical means provided in Excel® (i.e., [FILE-CLOSE] or clicking on the “X”). Using the END button allows the programmed routines in the Workbook to return the Excel® toolbar displays and other format options to those you normally use.

Chapter 2 MTCASGL – Workbook for Calculating Cleanup Levels for Individual Hazardous Substances

2.1 Overview

The **MTCASGL Workbook** allows the user to use chemical and toxicity data, site-specific information, and risk-based exposure assumptions to calculate either of the following for a **single** chemical contaminant:

- **Risk under Current Conditions:** The Workbook provides the tools necessary to calculate the risk (carcinogenic and non-carcinogenic) under current conditions. To calculate the risk under current conditions, the Workbook requires the user to enter a measured soil or ground water concentration. The Workbook then executes a "forward" calculation using the equations in the regulation and solving for risk. For soil measurements, the Workbook calculates the risk corresponding to the direct contact pathway, the leaching pathway (protection of ground water), and the vapor pathway (protection of air quality). The program indicates whether or not the measured concentration (current condition) is above or below the acceptable risk indices (pass/fail).
- **Cleanup Levels for Soil and Potable Ground Water:** The Workbook provides the tools necessary to calculate protective soil concentrations under Method B and Method C. The Workbook "back-calculates" a protective concentration based on the target risk levels (carcinogenic and non-carcinogenic) set forth in the regulation. For soil, the Workbook calculates a protective concentration for the direct contact pathway, the leaching pathway (protection of ground water), and the vapor pathway (protection of air quality). This calculated cleanup level might be lower or higher than the concentration actually measured in the sample.

The **MTCASGL Workbook** consists of two worksheets – the Worksheet for Calculating Soil Cleanup Levels (see Section 2.3) and the Worksheet for Calculating Potable Ground Water Cleanup Levels (see Section 2.4).

The **Worksheet for Calculating Soil Cleanup Levels** (soil worksheet) provides tools for evaluating both the direct contact pathway and the leaching pathway.

- For the evaluation of the **direct contact pathway**, the worksheet uses the equations provided in the regulation (see **Appendix B**). The worksheet allows the user to evaluate the soil ingestion pathway alone or in conjunction with the dermal pathway.
- For the evaluation of the **leaching pathway**, the worksheet uses the 3-phase equilibrium partitioning model described in the regulation (see **Appendix C**) to calculate a soil cleanup level that will not cause an exceedance of the ground water cleanup level established under WAC 173-340-720.

- For the evaluation of the **vapor pathway**, the worksheet uses the equations provided in the regulation to calculate an air cleanup level (**see Appendix D**) and then calculates a soil cleanup level that will not cause an exceedance of that air cleanup level using the 3-phase equilibrium partitioning model and the site-specific vapor attenuation factor entered by the user.

NOTE: The tools for evaluating the vapor pathway are provided for informational purposes only. Please consult the regulation and the site manager for more information regarding whether the pathway must be evaluated and how the pathway may be evaluated.

The **Worksheet for Calculating Potable Ground Water Cleanup Levels** (ground water worksheet) provides tools for calculating cleanup levels for potable ground water. The worksheet uses the equations in the regulation (**see Appendix A**). The worksheet does not provide tools for calculating cleanup levels for nonpotable ground water.

2.2 What's New on MTCASGL 11 (Version 11)?

Very minor modifications are made to enhance the usability of the program.

- Footnotes are inserted for input parameters to indicate which exposure pathway evaluations these inputs are used for. See Figure 2-1.

Figure 2-1 Examples of Footnotes

2.1 Oral Reference Dose ^{1, 3}
2.2 Oral Carcinogenic Potency Factor ^{1, 3}
2.3 Inhalation Reference Dose ⁵
2.4 Inhalation Carcinogenic Potency Factor ⁵

- 1: Soil ingestion only
 - 2: Soil dermal contact,
 - 3: Soil to ground water (leaching pathway),
 - 4: Ground water ingestion,
 - 5: Soil to air (vapor pathway).
- Codes are revised to reduce memory requirements, file size and simulation time and to increase calculation efficiency.

2.3 Calculating Soil Cleanup Levels (Soil Worksheet)

2.3.1 Accessing the Soil Worksheet

Once the MTCASGL Workbook is successfully loaded into Excel®, the title sheet will appear. Be sure to enable the MACROs. To use the Workbook tool, click on the **START** button (to exit, click on the **END** button). It is important to use the **END** button to exit the Workbook so your previous default Excel® settings (toolbars, work-area format) are restored. Selecting the **START** button makes the soil worksheet appear on your screen (light blue background).

Note the following regarding the structure and contents of the soil worksheet:

- Non-colored (white) cells in the sheet are used for data entry (other cells in the Workbook are write-protected and cannot be modified).
- The sheet is divided (“split”) into two windows – one shows the upper data entry portions, and the lower provides the means of viewing the bottom “calculation summary” portion of the sheet. Place your cursor in the upper window to begin data entry. If you prefer, you can remove the split by clicking on “**Window**” in the main toolbar and selecting “**Remove Split**.” The Calculation Summary shown in the bottom half of the screen is located at the bottom of the sheet.

2.3.2 Caution on Use of the Soil Worksheet

The soil cleanup levels calculated using the soil worksheet account for the following:

- Concentrations based on protection of human health (direct contact pathway);
- Concentrations based on protection of ground water (leaching pathway);
- Natural background concentrations; and
- Practical quantitation limits.

The soil cleanup levels calculated using the soil worksheet **DO NOT** account for the following:

- Concentrations established under applicable state and federal laws;
- Concentrations based on protection of air quality (vapor pathway);
- Concentrations based on protection of terrestrial ecological receptors;
- Residual saturation limit for protection of ground water; or
- Total site risk.

The soil cleanup levels calculated using the soil worksheet may need to be manually adjusted account for these considerations (see **Section 2.3.6**).

2.3.3 Equations and Parameters

The soil worksheet provides tools for evaluating the direct contact pathway, the leaching pathway (protection of ground water), and the vapor pathway (protection of air quality).

2.3.3.1 *Direct Contact Pathway*

For the evaluation of the direct contact pathway, the worksheet uses the standard equations provided in the regulation (**see Appendix B**). The worksheet allows the user to evaluate the soil ingestion pathway alone or in conjunction with the dermal pathway.

For each of the parameters used in the equations, default assumptions (values) are set forth in the regulation to calculate **standard** Method B or C cleanup levels. Under **modified** Methods B and C, specified default assumptions may be adjusted based on site-specific or chemical-specific data. The regulation specifically describes which parameters may be adjusted and how they may be adjusted.

- IF the regulation does not allow a parameter to be adjusted, THEN the worksheet uses the default value for that parameter provided in the regulation. Also, the parameter is not listed in the worksheet and the user may not input data for that parameter.
- IF the regulation allows a parameter to be adjusted, THEN the parameter is listed in the worksheet and the user may input either the default value provided in the regulation or a site-specific or chemical-specific value derived under the regulation.

2.3.3.2 *Leaching Pathway*

For the evaluation of the leaching pathway, the worksheet uses the 3-phase equilibrium partitioning model described in the regulation (**see Appendix C**) to calculate a cleanup level that will not cause an exceedance of the ground water cleanup level established under WAC 173-340-720. For each of the parameters used in the equations, the user may input either the default value provided in the regulation or a site-specific or chemical-specific value derived under the regulation.

For the evaluation of the leaching pathway, the worksheet also checks for soil saturation limits and warns the user if the soil saturation condition is exceeded.

2.3.3.3 *Vapor Pathway*

For the evaluation of the vapor pathway, the worksheet **first** uses the standard equations provided in the regulation (**see Appendix D**) to calculate air cleanup levels. For each of the parameters used in the equations, default assumptions (values) are set forth in the regulation to calculate **standard** Method B or C cleanup levels. Under **modified** Methods B and C, specified default assumptions may be adjusted based on site-specific

or chemical-specific data. The regulation specifically describes which parameters may be adjusted and how they may be adjusted. Irrespective of whether a parameter may be adjusted under the regulation, the worksheet uses the default value for that parameter provided in the regulation. Also, the parameter is not listed in the worksheet and the user may not input data for that parameter

Second, the worksheet converts the calculated air cleanup level into a soil vapor concentration using the vapor attenuation factor entered by the user.

Third, the worksheet uses the 3-phase equilibrium partitioning model (see **Appendix C**) and the soil vapor concentration to calculate the associated soil concentration – the concentration that is protective of air quality at the exposure point (point of compliance).

Ecology is currently evaluating appropriate procedures for evaluating the vapor pathway, including the use of vapor attenuation factors, and intends to provide further guidance on this issue.

2.3.4 Entering Data for Input Parameters

As discussed above, the worksheet lists only those parameters that may be adjusted by the user. For each of the parameters listed in the worksheet, the user must either enter the default value provided in the regulation or a site-specific or chemical-specific value derived under the regulation.

NOTE: If no data is available for an input parameter, then leave the input box blank unless specified otherwise.

As illustrated in the following sections, the parameters for which the user must enter data are listed on the left side of the worksheet. The user must enter the data in the corresponding non-shaded (white) boxes on the right side of the worksheet.

The worksheet is organized into **seven parts**. Each of the parameters listed under those parts is listed and described below. For each parameter, this User's Guide lists the default value provided in the regulation and references the applicable procedures for deriving a site-specific or chemical-specific value under the regulation.

Header Information: In the rectangular box at the top of the soil worksheet, enter the date, site name, and evaluator name. **NOTE:** Once an evaluation has been completed for a particular site, it is good practice to print out the results. Click on the **Preview** or **Print** button to confirm that the proper header information appears on all printout sheets. Remember to change the header information **EACH TIME** a new set of data is entered.

2.3.4.1 *Input Data – Part 1: General Information*

The first part of the worksheet (illustrated below in Figure 2-2) requires the user to input the following general information:

Figure 2-2 General Information

Item	Symbol	Value	Unit
1. General information			
Name of Chemical:		DDT	
Measured Soil Concentration, if any:	C_s	5	mg/kg
Natural Background Concentration for Soil:	NB_s		mg/kg
Practical Quantitation Limit for Soil:	PQL_s	0.008	mg/kg
To evaluate the ingestion and dermal pathways concurrently, check here and input values for AF , ABS_d , GI :			<input checked="" type="checkbox"/>

Name of Chemical: Enter the name of the chemical to be evaluated.

Measured Soil Concentration (if known): This parameter is used to calculate the carcinogenic and non-carcinogenic risk at the site under current conditions. Enter the soil concentration in milligrams per kilogram of soil (dry weight basis).

Natural Background (NB_s) Soil Concentration (if known): This parameter is used to adjust the soil cleanup level, if necessary. Methods for defining natural background concentrations are provided in WAC 173-340-709. Ecology has published information on background levels of certain metals (*Natural Background Soil Metals Concentrations in Washington State*, Publication No. 94-115).

Practical Quantitation Limit (PQL_s) for Soil (if known): This parameter is used to adjust the soil cleanup level, if necessary. The PQL_s is the lowest concentration of the contaminant that can be reliably measured within specified limits of precision, accuracy, representativeness, completeness, and comparability during routine laboratory operating conditions, using department approved methods. The analytical laboratory or site manager can assist in identifying the appropriate PQL_s .

Checkbox – Is an evaluation of the dermal pathway required? The checkbox item at the bottom of the first part of the worksheet requires the user to indicate whether an evaluation of the dermal pathway is required to calculate a soil concentration that is protective of human health based on direct contact. To determine whether an evaluation of the dermal pathway is required, see WAC 173-340-740(3)(c)(iii) and 173-340-745(5)(c)(iii). If an evaluation of the dermal pathway is required, then the user must enter a check in the checkbox and enter values for the following exposure parameters in **Part 3** below (see **Section 2.3.4.3**):

- Adherence Factor (AF);
- Dermal absorption fraction (ABS_d); and
- Gastrointestinal Absorption Conversion Factor (GI).

2.3.4.2 Input Data – Part 2: Toxicological Properties of the Chemical

The second part of the worksheet (illustrated in Figure 2-3) requires the user to input the following chemical-specific toxicological data:

Figure 2-3 Toxicological Properties

2. Toxicological Properties of the Chemical: Chemical-Specific			
Oral Reference Dose:	RfD_o	0.0005	mg/kg-day
Oral Carcinogenic Potency Factor:	CPF_o	0.34	kg-day/mg
Inhalation Reference Dose:	RfD_i		mg/kg-day
Inhalation Carcinogenic Potency Factor:	CPF_i	0.34	kg-day/mg

Oral Reference Dose (RfD_o): Enter the oral reference dose (mg/kg-day) for chemicals having non-carcinogenic toxicity. The applicable oral reference dose for a chemical is published in CLARC. Note that an oral reference dose may not be available for some chemicals. The process for establishing a reference dose is defined in WAC 173-340-708(7).

Oral Carcinogenic Potency Factor (CPF_o): Enter the oral carcinogenic potency factor (kg-day/mg) for chemicals having carcinogenic toxicity. The applicable oral cancer potency factor for a chemical is published in CLARC. Note that an oral cancer potency factor may not be available for some chemicals. The process for establishing a cancer potency factor is defined in WAC 173-340-708(8).

Inhalation Reference Dose (RfD_i): Enter the inhalation reference dose (mg/kg-day) for chemicals having non-carcinogenic toxicity. The applicable inhalation reference dose for a chemical is published in CLARC. Note that an inhalation reference dose may not be available for some chemicals. The process for establishing a reference dose is defined in WAC 173-340-708(7).

Inhalation Carcinogenic Potency Factor (CPF_i): Enter the inhalation carcinogenic potency factor (kg-day/mg) for chemicals having carcinogenic toxicity. The applicable inhalation cancer potency factor for a chemical is published in CLARC. Note that an inhalation cancer potency factor may not be available for some chemicals. The process for establishing a cancer potency factor is defined in WAC 173-340-708(8).

2.3.4.3 Input Data – Part 3: Exposure Parameters

The third part of the worksheet (illustrated in Figure 2-4) requires the user to input data for the following exposure parameters:

Figure 2-4 Exposure Parameters

3. Exposure Parameters			
Inhalation Correction Factor (default = "2" for volatiles; "1" for all others): for target ground water cleanup level	INH	1	unitless
Inhalation Absorption Fraction (default = "1"): for target air cleanup level	ABS_i	1	unitless
Gastrointestinal Absorption Fraction (default = "1"): for ingestion & dermal exposure pathways	ABI	1	unitless
Adherence Factor (default = "0.2"): for dermal exposure pathway	AF	0.2	mg/cm ² -day
Dermal Absorption Fraction (chemical-specific or defaults): for dermal exposure pathway	ABS_d	0.1	unitless
Gastrointestinal Absorption Conversion Factor (chemical-specific or defaults): for dermal exposure pathway	GI	0.5	unitless

Inhalation Correction Factor (*INH*): This parameter is used to calculate the ground water cleanup level. Enter the applicable default value ("2.0" for volatile organic compounds (as defined in WAC 173-340-200) and "1.0" for all other chemicals) or enter a chemical-specific value established under WAC 173-340-720(4)(c)(i). The applicable default value for a chemical is published in CLARC.

Inhalation Absorption Fraction (*ABS_i*): This parameter is used to calculate the air cleanup level. Enter the default value of "1.0" or enter a chemical-specific value established under WAC 173-340-750(3)(c)(i).

Gastrointestinal absorption fraction (*ABI*): This parameter is used to calculate a soil concentration that is protective of human health based on direct contact. Enter the default value of "1.0" or enter a chemical-specific value established under WAC 173-340-740(3)(c)(ii)(B) or 173-340-745(5)(c)(ii)(B).

Adherence Factor (*AF*): This parameter is used to calculate a soil concentration that is protective of human health based on direct contact. The parameter is specifically used to evaluate **dermal contact**. Enter the default value of "0.2" or enter a chemical-specific value established under WAC 173-340-740(3)(c)(ii)(C) or 173-340-745(5)(c)(ii)(C). If an evaluation of the dermal pathway is not required, then leave this input box blank.

Dermal Absorption Fraction (*ABS_d*): This parameter is used to calculate a soil concentration that is protective of human health based on direct contact. The parameter is specifically used to evaluate **dermal contact**. The parameter is chemical-specific. Enter a chemical-specific value established under WAC 173-340-740(3)(c)(ii)(C) or 173-340-745(5)(c)(ii)(C) or enter the applicable default value listed below:

- "0.01" for inorganic hazardous substances
- "0.0005" for volatile organic compounds with a vapor pressure \geq Benzene
- "0.03" for volatile organic compounds with a vapor pressure $<$ Benzene
- "0.1" for other organic hazardous substances

NOTE: Vapor pressure of Benzene is 0.125 atm (or, 95 mm Hg, 95 torr, 12.7 kPa) at 25°C.

The applicable default value for a chemical is published in CLARC. If an evaluation of the dermal pathway is not required, then leave this input box blank.

Gastrointestinal Absorption Conversion Factor (*GI*): This parameter is used to derive a **dermal** reference dose based on the oral reference dose or a **dermal** cancer potency factor based on the oral cancer potency factor. The dermal toxicity index is derived by dividing or multiplying the oral index by GI:

$$RfD_d = RfD_o \times GI \quad \underline{\text{OR}} \quad CPF_d = CPF_o \div GI$$

This parameter is chemical-specific. Enter a chemical-specific value established under WAC 173-340-740(3)(c)(ii)(C) or 173-340-745(5)(c)(ii)(C) or enter the applicable default value listed below:

- "0.2" for inorganic hazardous substances
- "0.8" for volatile organic compounds
- "0.5" for other organic hazardous substances

The applicable default value for a chemical is published in CLARC. If an evaluation of the dermal pathway is not required, then leave the input box blank.

2.3.4.4 Input Data – Part 4: Physical and Chemical Properties of the Chemical

The fourth part of the worksheet (illustrated in Figure 2-5) requires the user to input chemical-specific data for the following physical and chemical properties of the chemical:

Figure 2-5 Physical and Chemical Properties

4. Physical and Chemical Properties of the Chemical: Chemical-Specific			
Soil Organic Carbon-Water Partitioning Coefficient: for metals, enter K_d value here and enter "1" for f_{oc} value	K_{oc}	6.779E+05	l/kg
Henry's Law Constant: for the evaluation of ground water and vapor exposure pathway	H_{cc}	3.320E-04	unitless
*If the value for Henry's Law Constant is given in the unit of "atm.m ³ /mol", enter value here:	H	8.300E-06	atm.m ³ /mol
*Converted unitless form of H_{cc} @13° C: (Enter this converted value into " H_{cc} input Box" above for a calculation)	H_{cc}	3.535E-04	unitless
Solubility of the Chemical in Water: for the calculation of soil saturation limit	S	2.500E-02	mg/l

Soil Organic Carbon-Water Partitioning Coefficient (K_{oc}): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is chemical-specific.

- For **organic hazardous substances**, enter the K_{oc} value. The Workbook calculates a value for K_d using the K_{oc} value entered here and the f_{oc} value entered in the sixth part of the worksheet using Equation 747-2: $K_d = K_{oc} \times f_{oc}$. Default K_{oc} values are provided in Table 747-1 for selected nonionizing organics and Table 747-2 for selected ionizing organics. K_d values for other organic hazardous substances may be established as provided in WAC 173-340-747(5)(b).
- For **metals**, enter the distribution coefficient (K_d) instead of the K_{oc} value here and enter "1.0" for the f_{oc} value in the sixth part of the worksheet. Default values are provided in Table 747-3 for the selected metals. K_d values for other metals may be established as provided in WAC 173-340-747(5)(b).

The applicable default value for a chemical is published in CLARC; however, default values are not provided for all chemicals. As of this writing, Ecology is planning to publish in CLARC a more comprehensive database of K_{oc} or K_d (or K_{ow} octanol-water partition coefficient) values for organic and inorganic chemicals.

Henry's Law Constant (H_{cc} or H): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is chemical-specific.

- For metals except mercury, enter the default value of "0".
- For mercury, enter the default value of "0.47" or enter a value derived from the scientific literature, provided the requirements in WAC 173-340-702(14), (15) and (16) are met.
- For components of petroleum mixtures, enter the applicable default values provided in Table 747-4.
- For individual organic hazardous substances, enter a value derived from the scientific literature, provided the requirements in WAC 173-340-702(14), (15) and (16) are met.

The applicable default value for a chemical is published in CLARC; however, default values are not provided for all organic chemicals. As of this writing, Ecology is planning to publish in CLARC a more comprehensive database of H_{cc} values for organic chemicals.

To enter Henry's law constant, follow this set of instructions:

- IF Henry's law constant is provided as a **unitless** value, THEN enter that value in the " H_{cc} unitless" box.
- IF Henry's law constant is provided in units of **atm.m³/mol**, THEN the constant must be converted to a unitless value. The Workbook provides a conversion tool that allows the user to enter the constant in units of atm.m³/mol to determine the unitless form at 13°C. If the conversion tool is used, then the converted value provided by the Workbook must still be manually entered by the user in the " H_{cc} unitless" box. NOTE: ANY ENTRIES MADE INSIDE THE CONVERSION BOX ARE NOT USED IN THE PROGRAM.

Aqueous Solubility (S): This parameter is used to calculate the soil saturation limit (C_{sat}). This soil saturation limit corresponds to the theoretical chemical concentration in soil at which sorption limits of the soil particles, solubility limits of the soil pore water, and saturation of soil pore air have all been reached. The parameter is chemical-specific. The aqueous solubility of the contaminant must be entered as milligrams of contaminant per liter of water (mg/L). Information on solubility for common contaminants can be obtained from the scientific literature. These literature values may be used, provided the requirements in WAC 173-340-702(14), (15) and (16) are met.

2.3.4.5 Input Data – Part 5: Target Ground Water Cleanup Level

The fifth part of the worksheet (illustrated in Figure 2-6) requires the user to input the target ground water cleanup level for the site. The target ground water cleanup level is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the target ground water cleanup level). The parameter is site- and chemical-specific.

Figure 2-6 Target Ground Water Cleanup Level

5. Target Ground Water Cleanup Level	
<p>Target Ground Water Cleanup Level applicable for a soil cleanup level calculation:</p> <p><i>*Results from the Ground Water Cleanup Level Worksheet are not automatically transferred into this worksheet.</i></p>	<div> <div>Calc Ground Water CUL</div> <div>Method A CUL for Ground Water</div> </div> <div> C_w <div>0.2574 ug/l</div> </div>

The Workbook provides two methods for calculating the target ground water cleanup level. These two methods are described below.

Use and Adjustment of Method A Values in Table 720-1: For chemicals listed in Table 720-1 except petroleum mixtures, the value listed in Table 720-1 for a chemical may be used as the target ground water cleanup level, provided the value is manually adjusted based on the following:

- Consideration of potential surface water impacts (see WAC 173-340-720(4)(b)(ii) and 173-340-720(5)(b)(ii));
- Consideration of the nonaqueous phase liquid (NAPL) limitation (see WAC 173-340-720(7)(d)); and
- Consideration of total site risk (see WAC 173-340-720(7)(a)).

To see the values listed in Table 720-1, click the **Method A CUL for Ground Water** button to activate a “pop-up” list. The value from Table 720-1 must be manually adjusted as described above and then manually entered in the soil worksheet.

WARNING: The Workbook **DOES NOT** automatically enter a value from Table 720-1 in the soil worksheet.

Calculation of Method B or Method C Value: For chemicals not listed in Table 720-1, the user must calculate a potable ground water cleanup level using the ground water worksheet. To access the worksheet, click on the **Calc Ground Water CUL** button. See **Section 2.4** for instructions on calculating a potable ground water cleanup level.

Before calculating the potable ground water cleanup level (before clicking on the button), values for the following parameters must be entered in the soil worksheet:

- Oral Reference Dose (RfD_o) – Part 2
- Oral Carcinogenic Potency Factor (CPF_o) – Part 2
- Inhalation Correction Factor (INH) – Part 3

The Workbook calculates a potable ground water cleanup level based on the values entered for these parameters and the parameters listed in the ground water worksheet. The potable ground water cleanup level calculated using the ground water worksheet must be manually adjusted (as described in **Section 2.4**) and then manually entered in the soil worksheet (as noted in **Section 2.4**).

WARNING: The Workbook **DOES NOT** automatically enter the result from the ground water worksheet.

2.3.4.6 Input Data – Part 6: Hydrogeological Characteristics of the Site

The sixth part of the worksheet (illustrated in Figure 2-7) requires the user to input default or site-specific data for the following hydrogeological characteristics of the site:

Figure 2-7 Site-specific Hydrological Information

6. Site-Specific Hydrogeological Characteristics			
Total Soil Porosity (default = "0.43");	n	0.43	unitless
Volumetric Water Content (default = "0.30");	θ_w	0.3	unitless
Volumetric Air Content (default = "0.13");	θ_a	0.13	unitless
Dry Soil Bulk Density (default = "1.50");	ρ_b	1.5	kg/l
Fraction Soil Organic Carbon (default = "0.001"); for metals, enter "1" for f_{oc} value here	f_{oc}	0.005	unitless
Dilution Factor (default = "20" for unsaturated zone soil; "1" for saturated zone soil; or site-specific)	DF	12	unitless

Total Soil Porosity (n): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the default value of "0.43" or enter a site-specific value determined under WAC 173-340-747(6)(d)(iii)(D) using site-specific measurements. The site-specific soil porosity may be calculated using the following equation:

$$n = 1 - \frac{\rho_b}{\rho_s}$$

Table 2-1 Porosity and Density Information

Parameter	Definition	Default Value	Units
n	Total soil porosity	Calculated	unitless
ρ_b	Dry soil bulk density	1.50 (see note 1)	kg/L
ρ_s	Soil particle specific gravity	2.65 (see note 2)	kg/L

Footnotes:

- (1) Use the default value of 1.50 kg/L or use a site-specific value derived under WAC 173-340-747(5)(c). Use the same value as entered in Part 6 of the worksheet.
- (2) Use the default value of 2.65 kg/L or use a site-specific value derived under WAC 173-340-747(6)(d)(iii)(D). A site-specific value may be derived by measuring the soil particle specific gravity using ASTM Method D854-00.

Note that the sum of the volumetric water content and the volumetric air content must equal the total soil porosity.

Volumetric Water Content (θ_w): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the default value of "0.30" or enter a site-specific value derived under WAC 173-340-747(5)(d) using site-specific measurements. Note that the sum of the volumetric water content and the volumetric air content must equal the total soil porosity.

Volumetric Air Content (θ_a): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. The value for volumetric air content CANNOT be entered. The Workbook automatically calculates a value based on the values entered for total soil porosity (n) and volumetric water content (θ_w) using the following equation:

$$\theta_a = n - \theta_w$$

If the default values for total soil porosity ($n = 0.43$) and volumetric water content ($\theta_w = 0.3$) are entered, then the "default" volumetric air content is 0.13.

Dry Soil Bulk Density (ρ_b): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the default value of "1.50" or enter a site-specific value derived under WAC 173-340-747(5)(c) using site-specific measurements.

Fraction Soil Organic Carbon (f_{oc}): The fraction of soil organic carbon is the total mass of organic carbon divided by a unit mass of soil (mass of carbon/mass of soil). This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific.

- For **organic hazardous substances**, enter the default value of "0.001" or enter a site-specific value derived under WAC 173-340-747(5)(b)(i). The Workbook calculates a value for K_d using the f_{oc} value entered here and the K_{oc} value entered in the fourth part of the worksheet using Equation 747-2: $K_d = K_{oc} \times f_{oc}$.

- For **metals**, enter "1" for the f_{oc} value here and enter the distribution coefficient (K_d) instead of the K_{oc} value in the fourth part of the worksheet.

Soil samples that are analyzed for f_{oc} must be collected outside the area of contamination and below the root zone. The results are usually reported as percent organic carbon. The reported value can be converted to a fraction by dividing by 100.

Dilution Factor (DF): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the applicable default value ("20" for unsaturated zone soil and "1" for saturated zone soil) or enter a site-specific value derived under WAC 173-340-747(5)(f) using site-specific estimates of infiltration and ground water flow rate. Note that the default value of "20" might not be sufficiently protective of the ground water for a site where the source size is significantly larger than a half acre, as specified by the EPA.¹

2.3.4.7 Input Data – Part 7: Vapor Attenuation Factor for the Site

The seventh part of the worksheet (illustrated in Figure 2-8) requires the user to input the vapor attenuation factor for the site.

Figure 2-8 Vapor Attenuation Factor

7. Vapor Attenuation Factor due to Advection (building structure) & Diffusion (soil layer) Mechanisms		
* Vapor Attenuation Factor is the ratio of air concentration at the exposure point (e.g., within the building) to the vapor-phase contaminant concentration within the soil at the source		
Enter Vapor Attenuation Factor: for the evaluation of vapor exposure pathway	VAF	xxx unitless

Vapor Attenuation Factor (VAF): This parameter is used to calculate a soil concentration that is protective of air quality (that will not cause an exceedance of the air cleanup level at the point of compliance). This parameter is site- and chemical-specific.

The worksheet uses the 3-phase equilibrium partitioning model to predict the soil vapor concentration at the source based on the measured soil concentration. The worksheet then uses the vapor attenuation factor to predict the air concentration at the point of compliance based on the soil vapor concentration at the source. The vapor attenuation factor is based on several factors, including the emission rate of the contaminant from soil (due to diffusion and advection) and the amount of dilution that occurs through mixing with indoor and or outdoor ambient air.

WARNING: To calculate a soil cleanup level based on the vapor pathway, the user must enter a value for **VAF**. The user must enter a **site-specific** value because a default value has not been established.

¹ U.S. EPA, 1996. *Soil Screening Guidance: Technical Background Document*, EPA/540/R-95/128.

If it appears that the vapor pathway is a controlling factor at a site, the user needs to consult with the Ecology site manager to identify an appropriate method for evaluating the vapor pathway.

**THIS COMPLETES DATA ENTRY FOR THE SOIL WORKSHEET.
SAVE YOUR WORK BEFORE CONTINUING.**

2.3.5 Output – Interpreting the Result

The worksheet automatically calculates protective soil concentrations for the different pathways and then calculates a soil cleanup level based on those protective concentrations and other limits.

The worksheet displays the calculation results in two tables at the bottom of the active sheet (or in the lower window, if the screen is split).

2.3.5.1 Summary of Results

The first table (example shown below) displays the most stringent soil concentration based on soil direct contact and ground water protection, as well as other limits.

The first table requires the **user** to make **two decisions** that will affect the results displayed in the table.

(1) Can soil cleanup levels be established under Method C (industrial land use)?

To determine whether soil cleanup levels can be based on industrial land use (Method C), see WAC 173-340-745(1).

- If the site qualifies for use of Method C to establish soil cleanup levels, then enter a check in the box.
- If the site does not qualify for use of Method C to establish soil cleanup levels, then leave the checkbox blank.

(2) Can air cleanup levels be established under Method C?

To determine whether the air cleanup level can be based on industrial land use (Method C), see WAC 173-340-745(1).

- If the site qualifies for use of Method C to establish air cleanup levels, then enter a check in the box.
- If the site does not qualify for use of Method C to establish air cleanup levels, then leave the checkbox blank.

The first table then displays the results (example shown in Table 2-2). A description of the content of the table is provided below.

Table 2-2 Calculation Summary Table

B. SUMMARY OF SOIL CLEANUP LEVEL CALCULATIONS		
Chemical of Concern: DDT		
1. Summary of Results		
To calculate a soil cleanup level based on Industrial Land Use (Method C) for Direct Soil Contact, check here: <input checked="" type="checkbox"/>		
To calculate a soil concentration based on Method C vapor pathway, check here: <input checked="" type="checkbox"/>		
Basis for Soil Concentration	Conc	Units
Most stringent soil concentration based on Soil Direct Contact & Ground Water Protection:	1.047E+01	mg/kg
Natural Background concentration for Soil:	N/A	mg/kg
Practical Quantitation Limit for Soil:	0.008	mg/kg
Soil Cleanup Level (not considering vapor pathway):	1.047E+01	mg/kg
Soil concentration based on Vapor Pathway (informational purposes only):	2.628E+04	mg/kg
Soil Saturation Limit, C_{sat} :	8.475E+01	mg/kg
Retardation Factor, R :	11,825.4	unitless

C_{sat} corresponds to the total soil chemical concentration saturated in soil.
 R is the ratio of the ground water flow velocity to the contaminant migration velocity in saturated zone.

Chemical of Concern: The name of the chemical as entered by the user.

Most Stringent Soil Concentration based on Evaluation of the Direct Contact Pathway and the Leaching Pathway (mg/kg): The worksheet calculates protective soil concentrations based on the direct contact pathway and the leaching pathway (protection of ground water). The lower (most stringent) of these two concentrations is presented in the table.

Natural Background Soil Concentration (mg/kg): This is the chemical-specific natural background concentration entered by the user.

Practical Quantitation Limit for Soil (mg/kg): This is the chemical-specific practical quantitation limit entered by the user.

Soil Cleanup Level (mg/kg): The soil cleanup level presented in the table is the most stringent concentration based on evaluation of the direct contact pathway and the leaching pathway, unless that concentration is more stringent than either the natural background concentration or the PQL. If the calculated concentration is lower (more stringent) than either the natural background concentration or the PQL, then the worksheet adjusts the calculated concentration upward to the natural background concentration or the PQL, whichever is higher (less stringent).

Soil Saturation Limit (C_{sat}) (mg/kg): The soil saturation limit corresponds to the chemical concentration in soil at which sorption limits of the soil particles, solubility limits of the soil pore water, and saturation of soil pore air have all been reached. It is an indicator (a theoretical threshold) that the chemical may exist as a separate pure phase in

the soil and, if it is a liquid, may exist as a nonaqueous phase liquid with additional hazards to ground water quality.

Retardation Factor (R) (unitless): The retardation factor is the ratio of the ground water flow velocity to contaminant migration velocity. If the retardation factor is “10”, the contaminant plume in the saturated zone would move, on average, ten times slower than the ground water flow. This result is provided so that the user can assess the chemical’s relative mobility in the ground water. The result is not used in calculating the soil cleanup level.

2.3.5.2 Summary of Results by Exposure Pathway

The second table (example shown in Table 2-3) displays the results of more detailed calculations for the direct contact pathway, the leaching pathway, and vapor pathway to allow the user to determine the basis of the cleanup level.

Table 2-3 Summary of Calculation for Each Exposure Pathway

Table 2-3 Summary of Calculation for Each Exposure Pathway

2. Summary of Calculation for each Exposure Pathway

Summary by Exposure Pathway						
Soil Direct Contact			<u>Method B</u> Unrestricted Land Use @ HQ=1.0; RISK =1.0E-6		<u>Method C</u> Industrial Land Use @ HQ=1.0; RISK =1.0E-5	
			Ingestion only	Ingestion & Dermal	Ingestion only	Ingestion & Dermal
	Under the Current Condition	HQ? @ Exposure Point	1.250E-01	1.800E-01	2.857E-03	1.500E-02
		RISK? @ Exposure Point	1.700E-06	2.448E-06	1.295E-07	6.800E-07
	Target Soil	@HQ=1.0	4.000E+01	2.778E+01	1.750E+03	3.333E+02
CUL? mg/kg	@RISK =1.0E-6 or 1.0E-5	2.941E+00	2.042E+00	3.860E+02	7.353E+01	
Protection of Potable Ground Water			<u>Method B</u> @ HQ=1.0; RISK =1.0E-6		<u>Method C</u> @ HQ=1.0; RISK =1.0E-5	
	Under the Current Condition	Predicted Ground Water Conc? ug/l	1.229E-01			
		HQ? @ Exposure Point	1.536E-02		7.024E-03	
		RISK? @ Exposure Point	4.776E-07		4.776E-07	
	Target Ground Water CUL? ug/l		2.574E-01			
Target Soil CUL? mg/kg		1.047E+01				
Protection of Air Quality <i>(for informational purpose only)</i>			<u>Method B</u> @ HQ=1.0; RISK =1.0E-6		<u>Method C</u> @ HQ=1.0; RISK =1.0E-5	
	Under the Current Condition	Predicted Air Conc? ug/m ³ @Exposure Point	4.897E-05			
		HQ? @ Exposure Point	N/A		N/A	
		RISK? @ Exposure Point	1.903E-09		1.903E-09	
	Target Air CUL? ug/m ³	@ HQ=1.0	N/A		N/A	
		@ RISK=1.0E-6 or 1.0E-5	2.574E-02		2.574E-01	
Target Soil CUL? mg/kg	@ HQ=1.0	N/A		N/A		
	@ RISK=1.0E-6 or 1.0E-5	2.628E+03		2.628E+04		

For the **direct contact pathway**, the worksheet first calculates HQ and RISK under Method B and Method C based on the current site conditions.

- **Noncarcinogenic Risk under the Current Condition:** This is the hazard quotient (HQ) based on the measured soil concentration. The worksheet calculates the HQ using the direct contact equations in the regulation (ingestion only AND ingestion + dermal) and solving for HQ.
- **Carcinogenic Risk under the Current Condition:** This is the carcinogenic risk under the current condition based on the measured soil concentration. The worksheet calculates the carcinogenic risk using the direct contact equations in the regulation (ingestion only AND ingestion + dermal) and solving for carcinogenic RISK.

For the **direct contact pathway**, the worksheet next calculates protective soil concentrations under Method B and Method C based on the regulatory standards for HQ and RISK.

- **Target Soil CUL @ HQ = 1:** This is the protective soil concentration based on noncarcinogenic risk. The worksheet calculates the protective soil concentration using the direct contact equations in the regulation (ingestion only AND ingestion + dermal).
- **Target Soil CUL @ RISK = 1×10^{-6} (Method B) or 1×10^{-5} (Method C):** This is the protective soil concentration based on carcinogenic risk. The worksheet calculates the protective soil concentration using the direct contact equations in the regulation (ingestion only AND ingestion + dermal).

For the **leaching pathway**, the worksheet first calculates the predicted ground water concentration based on current site conditions using 3-phase model and then calculates the HQ and RISK under Method B and Method C based on the predicted ground water concentration.

- **Noncarcinogenic Risk under the Current Condition:** This is the hazard quotient (HQ) based on the measured soil concentration and the predicted ground water concentration. The worksheet calculates the HQ using the equation in the regulation and solving for HQ.
- **Carcinogenic Risk under the Current Condition:** This is the carcinogenic risk based on the measured soil concentration and the predicted ground water concentration. The worksheet calculates the RISK using the equation in the regulation and solving for carcinogenic RISK.

For the **leaching pathway**, the worksheet next calculates the soil concentration that is protective of ground water under either Method B or Method C using the 3-phase model.

The protective soil concentration is based on the target ground water cleanup level calculated using the ground water worksheet or defined by the user.

2.3.6 Output – Adjustment of Result

As noted previously (see **Section 2.3**), the soil cleanup levels calculated using the soil worksheet **DO NOT** account for several factors. Consequently, to establish a soil cleanup level under the regulation, the cleanup level calculated using the worksheet may need to be manually adjusted to account for the following:

- Concentrations established under applicable state and federal laws (WAC 173-340-740(3)(b)(i) or 173-340-745(5)(b)(i));
- Terrestrial ecological impacts (see WAC 173-340-740(3)(b)(ii) or 173-340-745(5)(b)(ii));
- Impacts on air quality (vapor pathway) (see WAC 173-340-740(3)(b)(iii)(C), (c)(iv) or 173-340-745(5)(b)(iii)(C), (c)(iv));
- Residual saturation (see WAC 173-340-747(2)(b) and (10)); and
- Total site risk (see WAC 173-340-740(5)(a) or 173-340-745(6)(a)).

2.4 Calculating Potable Ground Water Cleanup Levels (Ground Water Worksheet)

This worksheet calculates a Method B or Method C potable ground water cleanup level.

2.4.1 Accessing the Ground Water Worksheet

The ground water worksheet is accessed by selecting the **Calc Ground Water CUL** button in **Part 5** of the soil worksheet described in **Section 2.3.4.5** above.

2.4.2 Caution on Use of the Ground Water Worksheet

The potable ground water cleanup levels calculated using the ground water worksheet account for the following:

- Concentrations established under applicable state and federal laws;
- Concentrations based on protection of human health;
- Natural background concentrations; and
- Practical quantitation limits.

The potable ground water cleanup levels calculated using the ground water worksheet **DO NOT** account for the following:

- Concentrations based on potential surface water impacts;
- Nonaqueous phase liquid (NAPL) limitation; or

- Total site risk.

The ground water cleanup levels calculated using the ground water worksheet may need to be manually adjusted to account for these considerations.

2.4.3 Equations and Parameters

The worksheet uses the standard equations for calculating potable ground water cleanup levels provided in the regulation (**see Appendix A**). For each of the parameters used in the equations, default assumptions (values) are set forth in the regulation to calculate **standard** Method B or C cleanup levels. Under **modified** Methods B and C, specified default assumptions may be adjusted based on site-specific or chemical-specific data. The regulation specifically describes which parameters may be adjusted and how they may be adjusted.

- IF the regulation does not allow a parameter to be adjusted, THEN the worksheet uses the default value for that parameter provided in the regulation. Also, the parameter is not listed in the worksheet and the user may not input data for that parameter.
- IF the regulation allows a parameter to be adjusted, THEN the parameter is listed in the worksheet and the user may input either the default value provided in the regulation or a site-specific or chemical-specific value derived under the regulation.

2.4.4 User Input – Soil and Ground Water Worksheets

To calculate a potable ground water cleanup level, the Workbook requires the user to input data for several parameters, some of which are listed in the soil worksheet.

The following parameters necessary for calculating a potable ground water cleanup level are listed in the soil worksheet and must be entered there:

- Oral Reference Dose (*RfD_o*) – Part 2
- Oral Carcinogenic Potency Factor (*CPF_o*) – Part 2
- Inhalation Correction Factor (*INH*) – Part 3

The following parameters necessary for calculating a potable ground water cleanup level are listed in the ground water worksheet and must be entered there:

- Practical Quantitation Limit for Ground Water (if known)
- Natural Background Ground Water Concentration (if known)
- Most stringent ground water concentration based on applicable state and federal laws

This worksheet requires the user to provide information listed on the left side (see illustration shown in Figure 2-9). Data is entered in the corresponding non-shaded (white) boxes on the right.

Figure 2-9 Example: Method B Ground Water Cleanup Levels

1. Calculation of Method B Cleanup Levels for Potable Ground Water	
Basis for Ground Water Concentration	Concentration, ug/l
Concentration based on non-carcinogenic risk @ HQ=1.0	8.000E+00
Concentration based on carcinogenic risk @ Risk = 1 in 1,000,000 (1.0E-6)	2.574E-01
Concentration based on carcinogenic risk @ Risk = 1 in 100,000 (1.0E-5)	2.574E+00
Enter Practical Quantitation Limit of Ground Water	0.1
Enter Natural Background Level of Ground Water	0
Enter Most stringent concentration based on Applicable State or Federal Laws	N/A
Method B Potable Ground Water Cleanup Level = 2.574E-01	

Practical Quantitation Limit (PQL) for Ground Water (if known): This parameter is used to adjust the ground water cleanup level as provided in WAC 173-340-720(7)(c), if necessary. The parameter is chemical-specific. The PQL is the lowest concentration of the contaminant that can be reliably measured within specified limits of precision, accuracy, representativeness, completeness, and comparability during routine laboratory operating conditions, using Department-approved methods. The analytical laboratory or site manager can assist the user in identifying the appropriate PQL. Enter the PQL for the chemical, if known. If the PQL is not known, leave the entry box blank.

Natural Background Ground Water Concentration (if known): This parameter is used to adjust the ground water cleanup level as provided in WAC 173-340-720(7)(c), if necessary. The parameter is chemical- and site-specific. Enter the natural background ground water concentration, if known. Methods for defining natural background concentrations are provided in WAC 173-340-709. If the natural background concentration is not known, leave the entry box blank.

Most Stringent Ground Water Concentration Based on Applicable State or Federal Laws: This parameter is used to calculate a ground water cleanup level and is chemical-specific. Enter the most stringent (lowest) ground water concentration (criteria) established under applicable state or federal law for the chemical of concern. Ground water concentrations (criteria) established under applicable state or federal law are published in CLARC.

THIS COMPLETES DATA ENTRY FOR THE GROUND WATER WORKSHEET. SAVE YOUR WORK BEFORE CONTINUING.

2.4.5 Output – Interpreting the Result

For hazardous substances for which sufficiently protective, health-based concentrations have been established under applicable state and federal laws, the worksheet establishes a ground water cleanup level based on the most stringent of those concentrations. A concentration established under applicable state and federal laws is sufficiently protective if the excess cancer risk does not exceed 1 in 100,000 (1×10^{-5}) and the hazard quotient does not exceed one (1). If the concentration is not sufficiently protective, the worksheet calculates a protective concentration by adjusting the concentration downward in accordance with WAC 173-340-720(7)(b), using the equations provided in the regulation.

For hazardous substances for which health-based concentrations have not been established under applicable state and federal laws, the worksheet calculates a protective concentration using the equations provided in the regulation.

If the ground water cleanup level is lower (more stringent) than either the natural background concentration or the PQL, then the worksheet adjusts the cleanup level upward to the natural background concentration or the PQL, whichever is higher (less stringent).

2.4.6 Output – Adjustment of Result

As noted previously (see **Section 2.4.2**), the potable ground water cleanup levels calculated using the ground water worksheet **DO NOT** account for several factors. Consequently, to establish a potable ground water cleanup level under the regulation, the cleanup level calculated using the worksheet may need to be manually adjusted to account for the following:

- Concentrations based on potential surface water impacts (see WAC 173-340-720(4)(b)(ii) and (5)(b)(ii));
- Nonaqueous phase liquid (NAPL) limitation (see WAC 173-340-720(7)(d)); and
- Total site risk (see WAC 173-340-720(7)(a)).

2.4.7 Output – Transfer of Adjusted Result to Soil Worksheet

To calculate a corresponding soil cleanup level using the soil worksheet, the potable ground water cleanup level calculated using the ground water worksheet must be manually adjusted (as described above) and then manually entered in the soil worksheet. The Workbook DOES NOT automatically enter the result from the ground water worksheet.

Chapter 3 MTCATPH – Workbook for Calculating Cleanup Levels for a Petroleum Mixture

3.1 Overview

The **MTCATPH Workbook** allows the user to use pre-established chemical and toxicity data, risk-based and site-specific exposure assumptions, and user-defined and site-specific information to calculate either of the following for a **petroleum mixture**:

- **Risk under Current Conditions:** The Workbook provides the tools necessary to calculate the risk (carcinogenic and non-carcinogenic) under current conditions (site-specific analytical measurement). To calculate the risk under current conditions, the Workbook requires the user to enter a measured soil or ground water concentration. The Workbook then executes a "forward" calculation using the equations in the regulation and solving for risk. For soil measurements, the Workbook calculates the risk corresponding to the direct contact pathway, the leaching pathway (protection of ground water), and the vapor pathway (protection of air quality).
- **Site-specific and Risk-based Cleanup Levels for Soil and Ground Water (for Potable or Protection of Surface Water):** The Workbook provides the tools necessary to calculate protective soil concentrations under Method B and Method C. The Workbook "back-calculates" a protective concentration based on the target risk levels (carcinogenic and non-carcinogenic) set forth in the regulation. For soil, the Workbook calculates a protective concentration for the direct contact pathway, the leaching pathway (protection of ground water), and the vapor pathway (protection of air quality).

The **MTCATPH Workbook** consists of two sets of worksheets – the Worksheet set for:

- Calculating Soil TPH Cleanup Levels
- Calculating Ground Water TPH Cleanup Levels

3.2 Prerequisites for Use

To use the MTCATPH Workbook, the user should be familiar with the concept of TPH fractions and the analytical requirements for TPH mixtures. Special analyses are required for various types of TPH mixtures (see Table 830-1 in WAC 173-340-900) to adequately characterize TPH for evaluation using this Workbook tool. Depending on the type of TPH, analysis may also be required for specific volatile petroleum components (BTEX), fuel additives, semi-volatile compounds and other contaminants. A primer on TPH mixtures, fractions and analytical requirements is included in **Appendix E**.

The fundamental equations, associated parameters, physical-chemical properties of TPH fractions and default values for calculating soil cleanup levels based on the leaching pathway (protection of ground water) are set forth in WAC 173-340-747 and reproduced in **Appendices C and F (revised)**. An in-depth technical discussion of the model theory - equilibrium partitioning for soil-to-ground water exposure pathway is included in a separate article (Park and San Juan, 2000²).

3.3 Restrictions and Cautions on Use

The MTCATPH Workbook uses the three- and four-phase equilibrium partitioning models to calculate soil concentrations that are protective of ground water quality. The four-phase model may be used only on a case-by-case basis for soil containing fuels (e.g., gasoline) that have been enhanced with alcohol. If the model is used for alcohol-enhanced fuels, then it needs to be demonstrated that the effects of co-solvency have been adequately considered and, where necessary, taken into account when using the tools. Use of the model for alcohol-enhanced fuels without considering the effects of co-solvency and increased ground water contamination is prohibited. See WAC 173-340-747(6)(b).

The four-phase model is intended for use primarily on known fresh or weathered TPH mixtures. Use of the tool for other mixtures of organic compounds (a mixture of solvents and creosote compounds, for example) is not as well tested as for petroleum product applications and the results may not be as reliable. Such applications need to be thoroughly scrutinized (quality checked) to make sure the results are within reasonable bounds.

3.3.1 Calculating Soil Cleanup Levels

The soil cleanup levels calculated using the soil worksheet account for the following:

- Concentrations based on protection of soil direct contact pathway (human health) – two options:
 - Method B
 - Method C
- Concentrations based on protection of ground water quality (leaching pathway) - use either or both features when necessary and applicable:
 - Based on calculated Method B potable ground water cleanup level (which is based on protection of human health and does not account for several site-specific factors) and/or
 - Based on adjusted site-specific target ground water cleanup level
- Natural background concentrations; and
- Practical quantitation limits.

² Hun Seak Park and Charles San Juan, 2000. *A Method for Assessing Leaching Potential for Petroleum Hydrocarbons Release Sites: Multiphase and Multi-substance Equilibrium Partitioning*, Journal of Soil and Sediment Contamination, 9(6):611-632.

The soil cleanup levels calculated using the soil worksheet **DO NOT** account for the following:

- Concentrations established under applicable state and federal laws (as of this writing, there are no applicable soil criteria for substances that are part of a TPH mixture);
- Concentrations based on protection of air quality (vapor pathway);
- Concentrations based on protection of terrestrial ecological receptors;
- Residual saturation limit for protection of ground water; or
- Total site risk (where chemicals other than petroleum mixtures co-exist at a site; e.g., chlorinated solvents).

The soil cleanup levels calculated using the soil worksheet may need to be manually adjusted to account for these considerations (see **Section 3.7.5**).

Note: Unlike the previous version, the revised MTCATPH Workbook DOES provide the user the additional means to manually enter the target TPH ground water cleanup level (including a value that has been manually adjusted) in the soil worksheet so that the user can calculate the protective soil condition. In addition, IF the ground water cleanup level must be manually adjusted to account for total site risk as described above, THEN the MTCATPH Workbook can still be used to calculate a soil cleanup level by manually adjusting the target risk for the TPH mixture and using the "TPH Test (or Alternative)" button in Sheet A2. 2. See Section 3.7.

3.3.2 Calculating Ground Water Cleanup Levels

The potable ground water cleanup levels calculated using the ground water worksheet account for the following:

- Concentrations established under applicable state and federal laws;
- Concentrations based on protection of human health;
- Natural background concentrations; and
- Practical quantitation limits.

The potable ground water cleanup levels calculated using the ground water worksheet **DO NOT** account for the following:

- Concentrations based on potential surface water impacts;
- Nonaqueous phase liquid (NAPL) limitation; or
- Total site risk (where chemicals other than petroleum mixtures exist at a site; e.g., chlorinated solvents).

The ground water cleanup levels calculated using the ground water worksheet may need to be manually adjusted to account for these considerations. See **Section 3.8.4**.

3.4 What's New on MTCATPH 11 (Version 11)?

The calculation formulas used for this revised Workbook (Version 11) are exactly the same as those used in previous version (Version 10). However, several changes were made to the table of physical and chemical properties and the toxicological information for several petroleum fractions and individual hazardous substances. These changes do affect the calculation results. Some modifications were made to enhance the usability of program.

- Significant changes were made to the Table in Appendix F: “Properties of Chemicals commonly found at Petroleum Contaminated Sites” to incorporate updated and new scientific information. Click on the “Data Base” button to view Appendix F. Revised information in Appendix F will be used by MTCATPH Workbook to evaluate and develop TPH cleanup levels for hazardous waste sites contaminated with petroleum. Note that two additional chemicals have been added to the database of petroleum products.
 - The values for Naphthalene (CAS #91-20-3) no longer represent a total value for Naphthalene, 1-Methyl Naphthalene, and 2-Methyl Naphthalene. The values for now represent only the values for pure Naphthalene.
 - As a consequence of the change above, two chemicals were added to the database: 1-Methyl Naphthalene (CAS # 90-12-00) and 2-Methyl Naphthalene (CAS # 91-57-6).

NOTE: You do not need to specifically test for and determine the concentration of 1-Methyl Naphthalene in the media of concern. This is because 1-Methyl Naphthalene can be assessed as part of the aromatic fraction >EC12 to EC16 (which you must already test for). This is because the toxicity and the physical and chemical properties of 1-Methyl Naphthalene are very similar to those of the aromatic fraction >EC12 to EC16. In addition, there are no routine testing methods specifically for 1-Methyl Naphthalene; other testing methods would need to be modified to test for it (e.g., modification of calibration stock solution and/or GC/MS library scanning module).

- The references doses (inhalation and oral) for several petroleum fractions and individual hazardous substance were updated. Additional and more detailed information regarding the nature and basis for these changes can be found in Appendix F of this document and on the CLARC web site: <https://fortress.wa.gov/ecy/clarc/CLARCHome.aspx>.
<https://fortress.wa.gov/ecy/clarc/FocusSheets/petroToxParameters.pdf>
- New summary tables for soil TPH cleanup levels calculation (A2: Calculation and Summary of Results) and Ground Water TPH cleanup levels calculation were added.
- The Workbook was revised to allow users to automatically calculate both soil and ground water cleanup levels for TPH by clicking just one button. Previously, the user

had to either toggle with different back-calculation buttons or manually adjust the TPH levels to establish the protective concentrations. See Section 3.7.4.

- For the Soil Worksheet, the Workbook was revised to allow users to manually enter the target ground water cleanup level. As described in Section 3.3.2, the potable ground water cleanup level calculated by the Workbook does not account for (1) concentrations based on potential surface water impacts; (2) the nonaqueous phase liquid (NAPL) limitation; or (3) total site risk (where chemicals other than petroleum mixtures exist at a site). This new feature of the Workbook allows the user to manually adjust the calculated value and enter the adjusted value into the Soil Worksheet. The user may also use this feature to calculate the soil cleanup level that is protective of surface water by manually entering the ground water concentration that is protective of surface water. See Section 3.7.3.
- When the Workbook is loaded, typical EXCEL toolbar functions are turned off and revised codes provide the maximum area on the monitor screen to view the overall data without moving the horizontal scroll bar. If necessary, the user can resize the Workbook page with the percent box to make the sheet and cells larger or smaller.
- A “Clear” Button was added to properly clear all previously entered site-specific data.
- Footnotes were inserted for input parameters.
- The pop-up windows were updated to provide the user more information on the use of button.
- The codes were also modified to improve multi-tasking with other Windows programs while the calculations are being made.
- The codes were also revised to reduce memory requirements and simulation time and to increase calculation efficiency.
- The interface (Navigator) was modified to improve the usability of the program.

3.5 Overview of Equations and Parameters

3.5.1 Calculating Soil Cleanup Levels

The soil worksheet provides tools for evaluating the direct contact pathway, the leaching pathway (protection of ground water), and the vapor pathway (protection of air quality-informational purpose only).

3.5.1.1 *Direct Contact Pathway*

For evaluation of the direct contact pathway, the worksheet uses the standard equations provided in the regulation (see **Appendix B and Table 3-1 and Table 3-2**) and summarized below. For petroleum mixtures, evaluation of the direct contact pathway involves a concurrent evaluation of both soil ingestion and dermal contact.

Table 3-1 Method B Equations

TPH Mixture	
• Non-carcinogenic risk	Equation 740-3
TPH Components	
• Non-carcinogenic risk	Equation 740-4
• Carcinogenic risk	Equation 740-5

Table 3-2 Method C Equations

TPH Mixture	
• Non-carcinogenic risk	Equation 745-3
TPH Components	
• Non-carcinogenic risk	Equation 745-4
• Carcinogenic risk	Equation 745-5

For each of the parameters used in the equations, default assumptions (values) are set forth in the regulation to calculate **standard** Method B or C cleanup levels. Under **modified** Methods B and C, specified default assumptions may be adjusted based on site-specific or chemical-specific data. The regulation specifically describes which parameters may be adjusted and how they may be adjusted.

Irrespective of whether a parameter may be adjusted under the regulation, the worksheet uses the default value for that parameter provided in the regulation. Also, the parameter is not listed in the worksheet and the user may not input data for that parameter

The default values for parameters are documented in the “Data Base” [accessed using [MAIN](#)] (the tool navigator)] and in **Appendix F (revised)**. The user should refer to these sources to understand the basis for the cleanup levels calculated using the MTCATPH Workbook.

3.5.1.2 Leaching Pathway

For evaluation of the leaching pathway, the worksheet uses the three and four-phase equilibrium partitioning models (depending upon NAPL formulation) described in the regulation (see **Appendix C**) to calculate a cleanup level that will not cause an exceedance of the ground water cleanup level established under WAC 173-340-720. For each of the parameters used in the equations, the user may input either the default value provided in the regulation or a site-specific or chemical-specific value derived under the regulation.

3.5.1.3 Vapor Pathway

For evaluation of the vapor pathway, the worksheet **first** uses the standard equations provided in the regulation (**see Appendix D**) to calculate air cleanup levels. For each of the parameters used in the equations, default assumptions (values) are set forth in the regulation to calculate **standard** Method B or C cleanup levels. Under **modified** Methods B and C, specified default assumptions may be adjusted based on site-specific or chemical-specific data. The regulation specifically describes which parameters may be adjusted and how they may be adjusted. Irrespective of whether a parameter may be adjusted under the regulation, the worksheet uses the default value for that parameter provided in the regulation. Also, the parameter is not listed in the worksheet and the user may not input data for that parameter.

Second, the worksheet converts the calculated air cleanup level into a soil vapor concentration using the vapor attenuation factor manually entered by the user.

Third, the worksheet uses the three- or four-phase equilibrium partitioning models (**see Appendix C**) and the soil vapor concentration to calculate the associated soil concentration – the concentration that is protective of air quality at the exposure point (point of compliance).

Ecology is currently evaluating appropriate procedures for evaluating the vapor pathway, including the use of vapor attenuation factors, and intends to provide further guidance on this issue.

Note: The tools for evaluating the vapor pathway are provided for informational purposes only. Please consult the regulation and the site manager for more information regarding whether the pathway must be evaluated and how the pathway may be evaluated.

3.5.2 Calculating Ground Water Cleanup Levels

The ground water worksheet uses the standard equations provided in the regulation (**see Appendix A**). For each of the parameters used in the equations, default assumptions (values) are set forth in the regulation to calculate **standard** Method B or C cleanup levels. Under **modified** Methods B and C, specified default assumptions may be adjusted based on site-specific or chemical-specific data. The regulation specifically describes which parameters may be adjusted and how they may be adjusted.

Irrespective of whether a parameter may be adjusted under the regulation, the worksheet uses the default value for that parameter provided in the regulation. Also, the parameter is not listed in the worksheet and the user may not input data for that parameter.

The default values for parameters are documented in the “Data Base” [accessed using **MAIN**] (the tool navigator)] and in **Appendix F**. The user should refer to these sources to understand the basis for the cleanup levels calculated using the MTCATPH Workbook.


3.6 Navigating the Workbook and Visual Organization of the Workbook Interface

The Workbook uses a pop-up dialogue-sheet (Navigator) to guide the user through data entry, calculation execution, and calculation results summary worksheets.

Figure 3-1 below depicts a flow chart illustrating how the MTCATPH interface works. Details of how each window functions are provided in the following several sections.

Once the Workbook is successfully loaded into Excel®, the title sheet will appear as shown in Figure 1-2 (Installation). “Navigator” is a floating menu that pops up over the worksheet when the user click “Main” from any worksheet selected. To use the Workbook, click on the **START** button (to exit, click on the **END** button). When the **START** button is selected, the Workbook loads a navigation box as shown below:

Figure 3-1 Overview of MTCATPH Interface (Navigator)

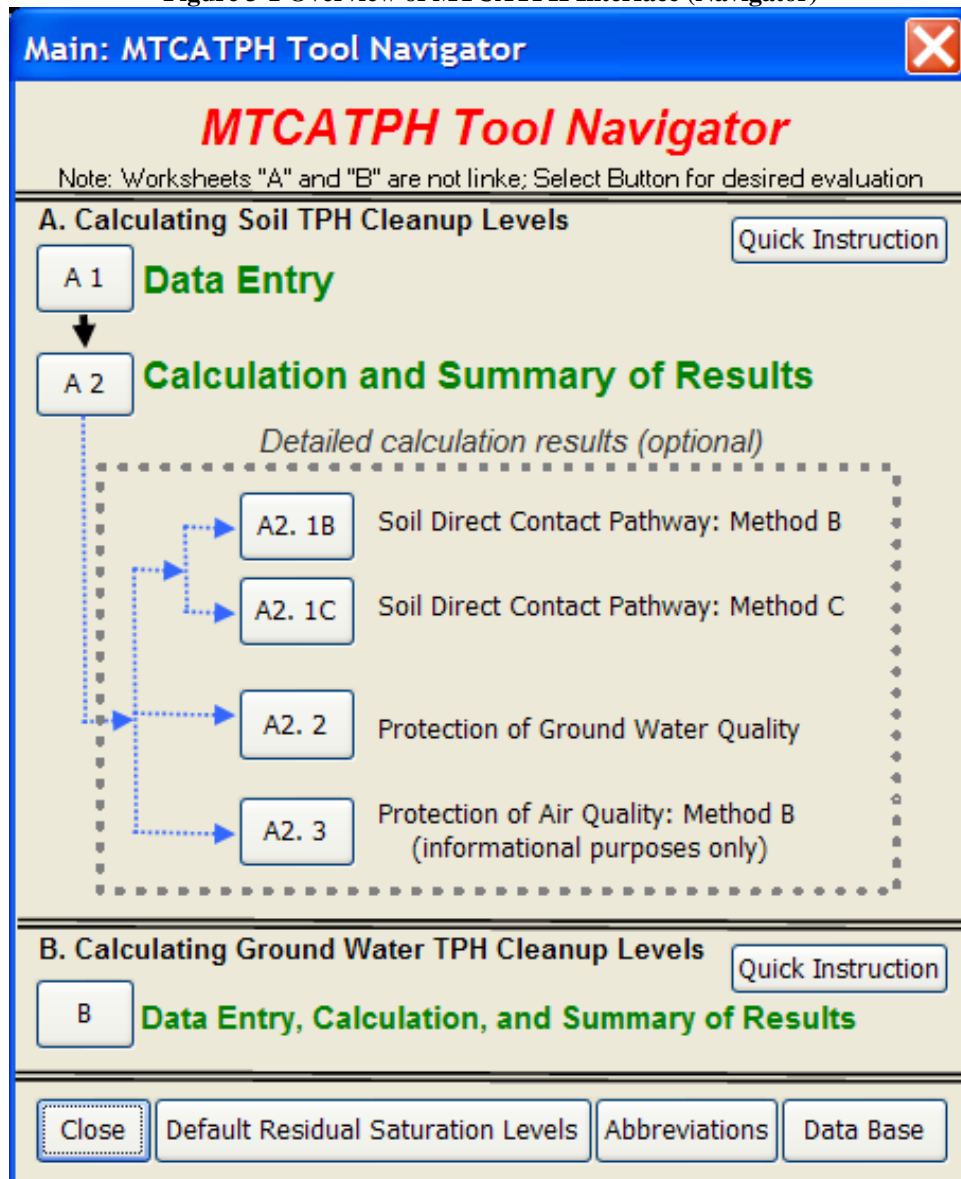

*NOTE: EACH WORKSHEET IN THE WORKBOOK CONTAINS A BUTTON LABELED **MAIN**. THIS BUTTON CAN BE USED TO GO BACK TO THE NAVIGATION BOX SHOWN ABOVE. ONCE YOU ARRIVE AT A PARTICULAR WORKSHEET USING THE NAVIGATION BOX (MTCATPH Tool Navigator), YOU MUST CLICK ON THE **Close** BUTTON (AT BOTTOM) BEFORE CONTINUING. WORKSHEETS “A” AND “B” ARE NOT LINKED TO EACH OTHER.*

As shown in the hierarchical structure, only sheets **A1** and **B** are used for data entry. Sheet **A2** is used for the execution of calculation and calculation summary results for establishing soil TPH cleanup levels. Sheets **A2. 1B** and **A2. 1C** are used to examine the detailed calculation results for the soil direct contact pathway under the unrestricted and industrial land use scenarios that result from the data entry for soil. **Section 3.7** of this User’s Guide provides additional discussion of the results and evaluation options presented in these sheets. This detail is useful in determining what TPH fractions or other compounds are actually causing a risk exceedance, and therefore what components may be “driving” a site cleanup action. Similar information is provided in sheets **A2. 2** and **A2. 3** for the leaching pathway (protection of ground water) and the vapor pathway (protection of air quality). Sheet B is used for entering data and evaluating the potable ground water cleanup level.

Additional buttons provided at the MTCATPH Tool Navigator are:

Quick Instruction: There are two quick instruction buttons which show the user how to calculate soil TPH cleanup levels and ground water TPH cleanup levels. These buttons explain how to enter the data and to execute the calculation for establishing the TPH cleanup levels.

Default Residual Saturation Screening Levels: This shows the default residual saturation screening levels for different TPH mixtures as set forth in WAC 173-340-900, Table 747-5. For a soil concentration to be protective of ground water, the regulation requires that the concentration must not result in the accumulation of non-aqueous phase liquid (NAPL) on or in the ground water. WAC 173-340-747(2)(b). The default residual saturation screening levels may be used to determine whether the soil concentration calculated using the three- and four-phase models meets the regulatory requirement. Site-specific residual saturation screening levels may also be established. See WAC 173-340-747(10).

Abbreviations: This shows the list of abbreviations used in the MTCATPH Workbook.


Data Base: This shows the supporting physical-chemical and toxicological information used in the Workbook calculations for TPH fractions and associated hazardous compounds. Click on **MAIN** in the upper left corner to return to the navigation tool.

3.7 Calculating Soil TPH Cleanup Levels

3.7.1 Quick Instruction on How to Calculate the Soil TPH Cleanup Levels

See Figure 3-2 for the quick instruction for calculating soil TPH cleanup levels.

Figure 3-2 Quick Calculation Instruction for Soil TPH Cleanup Levels

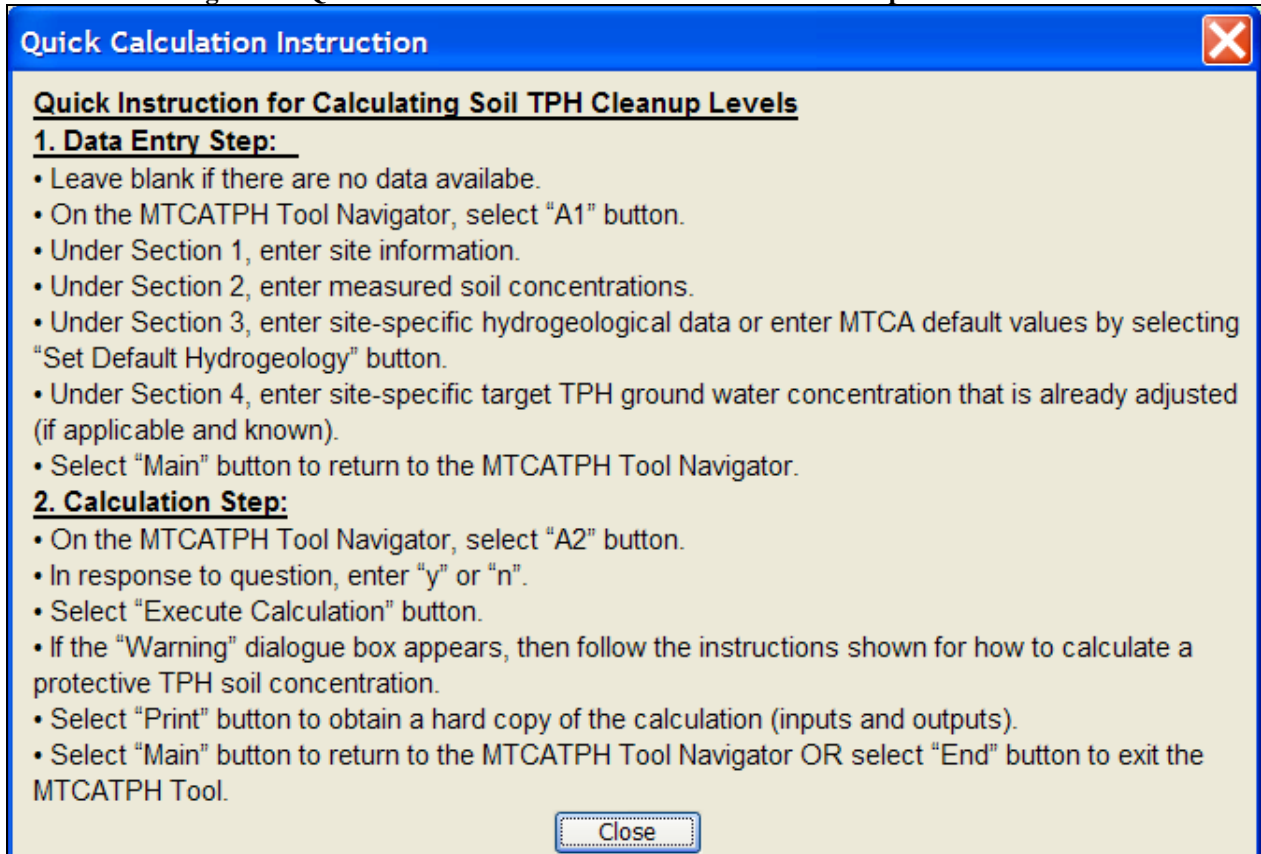

The "Execute Calculation" button is located at the right top corner of the worksheet (A2) and allows the user to simultaneously and automatically evaluate the site-specific risk under the current site condition entered the "A1" worksheet and develop the soil TPH cleanup levels for both soil direct contact and soil-to-ground water exposure pathways.

Depending on the speed of your computer, the calculations may take several minutes to complete. You can follow the changes in the numbers that appear in the trial solution and set cell by watching the Status Bar box on the left bottom of the screen shown. The calculation summary results will appear in the blue-colored table section 1 row at the top of the main table (**1. Summary of Calculation Results** of the sheet "**A2: Soil Cleanup Levels**"). The table stores all information used to calculate the TPH cleanup levels during the course of the calculations, and this information in the gray portion of the lower table is provided for informational purpose.

3.7.2 Entering Data – Input A1

The user is required to enter all necessary site data and analytical data before performing any data analysis. The user can always go back to change data that has been entered previously by clicking on the appropriate button on the Navigator box.

3.7.2.1 Accessing the Soil Worksheet

In the MTCATPH Workbook Navigator Box, select Worksheet A1 (Data Entry).

3.7.2.2 Input Data – Part 1: Enter Logistical Site Information

User-specified text format is entered here. As shown in Figure 3-3, enter descriptive text for the identification of a particular site (or a sample or a project) such as date, site name, sample name, and additional information if necessary. MTCATPH does not require the user to enter information for any of these entries, as they are solely there for the benefit of the user.

Figure 3-3 Site Information

<u>1. Enter Site Information</u>	
Date:	
Site Name:	ABC stop
Sample Name:	ECY fresh gasoline default

3.7.2.3 Input Data – Part 2: Enter Measured Soil Concentration

The second part of the worksheet (illustrated in Figure 3-4) requires the user to input analytical data (soil concentrations: dry basis mg/kg) in the non-shaded (white) cells for the chemicals of concern and petroleum EC groups appropriate for the type of TPH mixture being evaluated.

Note that the right-hand column automatically calculates the percentage of the total mixture represented by the particular fraction/compound. Be sure that the correct and consistent units are used for all chemical concentrations (milligrams/kilogram = mg/kg = ppm) and that you use the same number of significant figures as reported by the laboratory. Enter zero (0) for substances that are not analyzed (i.e., for gasoline, you probably would not test for the cPAHs, so these entries would all be zero). For values below the method detection limit, substitute one-half the method detection limit. For values above the method detection limit but below the practical quantitation limit, substitute the method detection limit. However, for a hazardous substance or petroleum fraction that has never been detected in any sample at a site and these substances are not suspected of being present at the site based on site history or other knowledge, enter “0” for that value. If the sample has been analyzed using both the VPH (Volatile Petroleum Hydrocarbons) and EPH (Extractable Petroleum Hydrocarbons) methods, use the higher value for the fraction where there is an overlap between these two methods.

All entries must be numeric values. Any text entry will cause a #VALUE# error to appear in the column to the right. This must be corrected or the Workbook will not execute its calculations correctly.

Figure 3-4 Entering Soil Concentration Measured

<u>2. Enter Soil Concentration Measured</u>		
Chemical of Concern or Equivalent Carbon Group	Measured Soil Conc dry basis mg/kg	Composition Ratio %
<u>Petroleum EC Fraction</u>		
AL_EC >5-6	35	4.14%
AL_EC >6-8	20	2.37%
AL_EC >8-10	40	4.73%
AL_EC >10-12	57	6.74%
AL_EC >12-16	125	14.79%
AL_EC >16-21	300	35.48%
AL_EC >21-34		0.00%
AR_EC >8-10	1	0.12%
AR_EC >10-12	24	2.84%
AR_EC >12-16	55	6.51%
AR_EC >16-21	145	17.15%
AR_EC >21-34		0.00%
Benzene	0.03	0.00%
Toluene	5	0.59%
Ethylbenzene	7	0.83%
Total Xylenes	13	1.54%
Naphthalene	15	1.77%
1-Methyl Naphthalene	0.1	0.01%
2-Methyl Naphthalene	0.2	0.02%
n-Hexane		0.00%
MTBE		0.00%
Ethylene Dibromide (EDB)		0.00%
1,2 Dichloroethane (EDC)		0.00%
Benzo(a)anthracene		0.00%
Benzo(b)fluoranthene		0.00%
Benzo(k)fluoranthene	1	0.12%
Benzo(a)pyrene	0.07	0.01%
Chrysene	1	0.12%
Dibenzo(a,h)anthracene	0.05	0.01%
Indeno(1,2,3-cd)pyrene	1	0.12%
Sum	845.45	100.00%

Avoid Double Counting: The petroleum fractions include hazardous substances that may also be individually quantified, depending upon the type of mixture(s) present at a site (see Table 830-1 in WAC 173-340-900). If you have quantified one or more

hazardous substances that are included in one of the TPH Equivalent Carbon (EC) - fractions, you need to make sure to subtract those concentrations from the appropriate EC-fraction concentrations. Otherwise, you are “double-counting” that particular substance. Table 3-3 provides information on the individual substances that are represented by a particular EC-fraction:

Table 3-3 Equivalent Carbon Numbers

Hazardous Substance	Equivalent Carbon	Number of Carbon	Associated EC-Fraction
n-Hexane (C ₆ H ₆)	6.00	6	AL_EC>5 -6
Ethylbenzene and Xylenes (C ₈ H ₁₀)	8.5 – 8.8	8	AR_EC>8-10
Naphthalene (C ₁₀ H ₈)	11.69	10	AR_EC>10-12
1-Methyl Naphthalene (C ₁₁ H ₁₀)	12.99	11	AR_EC>12 -16
2-Methyl Naphthalene (C ₁₁ H ₁₀)	12.84	11	AR_EC>12-16
Benzo(a)anthracene (C ₁₈ H ₁₂)	26.37	18	AR_EC>21-34
Benzo(b)fluoranthene (C ₂₀ H ₁₂)	30.14	20	AR_EC>21-34
Benzo(k)fluoranthene (C ₂₀ H ₁₂)	30.14	29	AR_EC>21-34
Benzo(a)pyrene (C ₂₀ H ₁₂)	31.34	20	AR_EC>21-34
Chrysene (C ₁₈ H ₁₂)	27.41	18	AR_EC>21-34
Dibenz(a,h)anthracene (C ₂₂ H ₁₄)		22	AR_EC>21-34
Indeno(1,2,3-cd)pyrene (C ₂₂ H ₁₂)	35.01	22	AR_EC>21-34

3.7.2.4 Input Data – Part 3: Enter Hydro-geological Characteristics of the Site

The third part of the worksheet (illustrated in Figure 3-5) requires the user to input default or site-specific data for the following hydro-geological characteristics of the site:

Figure 3-5 Entering Site-specific Hydrological Data

3. Enter Site-Specific Hydrogeological Data		
Total soil porosity:	<input type="text" value="0.43"/>	Unitless
Volumetric water content:	<input type="text" value="0.3"/>	Unitless
Volumetric air content:	<input type="text" value="0.13"/>	Unitless
Soil bulk density measured:	<input type="text" value="1.5"/>	kg/L
Fraction Organic Carbon:	<input type="text" value="0.003"/>	Unitless
Dilution Factor:	<input type="text" value="20"/>	Unitless

Total Soil Porosity (*n*): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the default value of "0.43" or enter a site-specific value determined under WAC 173-340-747(6)(d)(iii)(D) using site-specific measurements. Note that the sum of the volumetric water content and the volumetric air content must equal the total soil porosity. The site-specific soil porosity may be calculated using the following equation:

$$n = 1 - \frac{\rho_b}{\rho_s}$$

Table 3-4 Porosity Calculation

Parameter	Definition	Default Value	Units
n	Total soil porosity	Calculated	unitless
ρ_b	Dry soil bulk density	1.50 (see note 1)	kg/L
ρ_s	Soil particle specific gravity	2.65 (see note 2)	kg/L

Footnotes:

- (1) Use the default value of 1.50 kg/L or use a site-specific value derived under WAC 173-340-747(5)(c).
- (2) Use the default value of 2.65 kg/L or use a site-specific value derived under WAC 173-340-747(6)(d)(iii)(D). A site-specific value may be derived by measuring the soil particle specific gravity using ASTM Method D854-00.

Volumetric Water Content (θ_w): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the default value of "0.30" or enter a site-specific value derived under WAC 173-340-747(5)(d) using site-specific measurements. Note that the sum of the volumetric water content and the volumetric air content must equal the total soil porosity.

Volumetric Air Content (θ_a): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. The value for volumetric air content CANNOT be entered. The Workbook automatically calculates a value based on the values entered for total soil porosity (n) and volumetric water content (θ_w) using the following equation:

$$\theta_a = n - \theta_w$$

If the default values for total soil porosity ($n = 0.43$) and volumetric water content ($\theta_w = 0.3$) are entered, then the "default" volumetric air content is 0.13.

Dry Soil Bulk Density (ρ_b): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the default value of "1.50" or enter a site-specific value derived under WAC 173-340-747(5)(c) using site-specific measurements.

Fraction Soil Organic Carbon (f_{oc}): The fraction of soil organic carbon is the total mass of organic carbon divided by a unit mass of soil (mass of carbon/mass of soil). This parameter is used to calculate a soil concentration that is protective of ground water (that

will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the default value of "0.001" or enter a site-specific value derived under WAC 173-340-747(5)(b)(i). The Workbook calculates a value for K_d using the f_{oc} value entered here and the K_{oc} value in the database using Equation 747-2: $K_d = K_{oc} \times f_{oc}$.

Soil samples that are analyzed for f_{oc} must be collected outside the area of contamination and below the root zone. The results are usually reported as percent organic carbon. The reported value can be converted to a fraction by dividing by 100.

Dilution Factor (DF): This parameter is used to calculate a soil concentration that is protective of ground water (that will not cause an exceedance of the ground water cleanup level). The parameter is site-specific. Enter the applicable default value ("20" for unsaturated zone soil and "1" for saturated zone soil) or enter a site-specific value derived under WAC 173-340-747(5)(f) using site-specific estimates of infiltration and ground water flow rate. Note that the default value of "20" might not be sufficiently protective of the ground water for a site where the source size is significantly larger than a half acre, as specified by the EPA.³

3.7.2.5 *Input Data – Part 4: Enter target TPH ground water concentration, if adjusted (optional)*

If you adjusted the target TPH ground water concentration, enter the adjusted value here. As described in Section 3.3.2, the potable ground water cleanup level calculated by the Workbook does not account for (1) concentrations based on potential surface water impacts; (2) the nonaqueous phase liquid (NAPL) limitation; or (3) total site risk (where chemicals other than petroleum mixtures exist at a site). This new feature of the Workbook allows the user to manually adjust the calculated value and enter the adjusted value into the Soil Worksheet.

The user may also use this feature to:

- Calculate a soil concentration that is protective of non-potable ground water (by entering the non-potable ground water cleanup level); or
- Calculate a soil concentration that is protective of surface water quality (by entering the ground water concentration that is protective of surface water).


Figure 3-6 Entering Target TPH Ground Water Concentration

4. Target TPH Ground Water Concentration (if adjusted)		
If you adjusted the target TPH ground water		
concentration, enter adjusted	<input type="text" value="355"/>	ug/L
value here:		

³ U.S. EPA, 1996. *Soil Screening Guidance: Technical Background Document*, EPA/540/R-95/128.

3.7.2.6 Notes for Data Entry

Figure 3-7 Notes for Data Entry

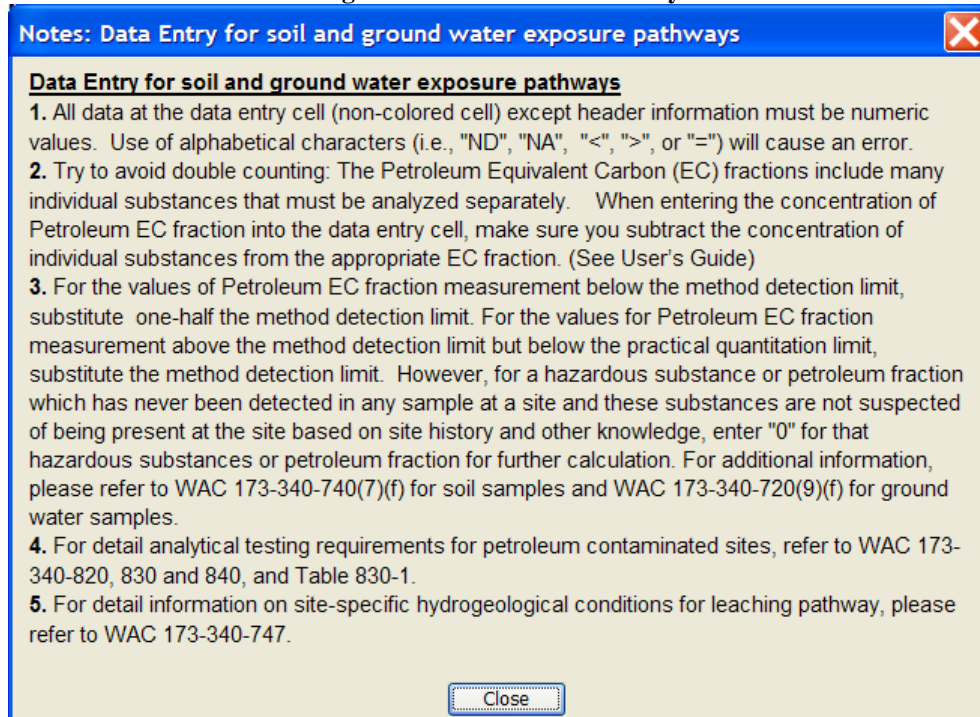


THIS COMPLETES DATA ENTRY FOR THE SOIL WORKSHEET. SAVE YOUR WORK BEFORE CONTINUING. You should save the file under a new file name that pertains to the particular site and sample.

3.7.3 Executing the Calculation and Analyzing the Output (Calculation Summary Table)

Click on **MAIN** in the upper right corner to return to the navigation tool. Open the MTCATPH Tool Navigator and click the button of "A2: Calculation and Summary of Results" Worksheet. Then enter "y" if new soil data entered or existing data edited; enter "n" otherwise in response to the question shown in Figure 3-8.

Figure 3-8 Calculating with New Data Entered

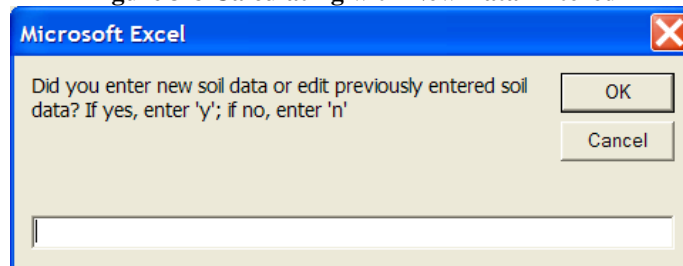

Additional buttons provided at this A2 Worksheet are:

Cautions: This button shows the cautionary statement on the use of this Workbook.

Main: This button allows the user to always return to the navigator.

Clear Calculation: This lets the user clear all previously calculated values stored in the A2 Worksheet. Once cleared, the cleared data is irretrievable.

Direct Contact Calculations: This lets the user execute the calculation for soil direct contact exposure pathway only.

Find the button “Execute Calculation” and click it to execute the calculation to establish the soil TPH cleanup levels to be protective of both pathways of direct soil contact and soil to ground water exposure pathways. This button runs all the calculations needed to generate the site-specific soil TPH cleanup level (backward-calculation) and the current risk (forward-calculation) under the site-specific data entered previously.

As shown in Table 3-5, the calculation summary will appear in the section 1 of the worksheet “A2.” The maximum TPH soil concentrations to be protective of each decision criteria are shown in the table along with associated carcinogenic risk and Hazardous Index values. The two protective soil concentrations are shown for Methods B and C, correspondingly.

The user needs to show that both the carcinogenic risk from individual hazardous substances and the non-carcinogenic risk from both TPH fractions and individual hazardous substances are acceptable.

Table 3-5 Summary of Calculation Results for Soil TPH

1. Summary of Calculation Results					
Exposure Pathway	Method/Goal	Protective Soil TPH Conc, mg/kg	With Measured Soil Conc		Does Measured Soil Conc Pass or Fail?
			RISK @	HI @	
Protection of Soil Direct Contact: Human Health	Method B	168	5.00E-06	2.51E-01	Fail
	Method C	6,778	1.24E-06	1.90E-02	Pass
Protection of Method B Ground Water Quality (Leaching)	Potable GW: Human Health Protection	4	2.14E-06	1.14E+00	Fail
	Target TPH GW Conc. @ 355 ug/L	46	NA	NA	Fail
Warning! Check to determine if a simplified or site-specific Terrestrial Ecological Evaluation may be required (Refer to WAC 173-340-7490 through ~7494).					

Depending on the speed of your computer and site-specific data entered previously, the calculation may take from several seconds to several minutes to complete. Do not disturb or stop the calculation. It may cause the erroneous calculation results. Click “Print” or “Preview” button for a hardcopy or a screen-view of inputs and outputs (Soil Cleanup Levels: Calculation Result Summary.) If the “Warning” dialogue box appears, then follow the instructions shown for how to calculate a protective soil TPH cleanup levels.

Occasionally, for the evaluation of soil-to-ground water exposure pathway, TPH soil cleanup level exceeds the theoretical maximum TPH that would be reached if all of the

air space in the porous medium is filled with petroleum product. It means the risk is acceptable even at this high soil TPH concentration. In this case, “***Soil-to-Ground Water is not a critical pathway!***” will appear in the Section 3 in the gray portion of lower summary table (**A2 Soil Cleanup Levels**). Also, “100% NAPL” will appear in the protective soil TPH concentration box in the Section 1 row at the top blue-colored portion of the main table. Then, the user should check the residual saturation TPH levels specified in WAC 173-340-747(10).

The **Execute Calculation** button should be clicked in order to run all the calculations needed to generate the results. Once the calculations are updated, the detailed calculation results for each exposure pathway are displayed. Additional information (e.g., why a particular assessment passed or failed?) can be obtained by clicking the **Main** button and navigating to the appropriate sheet (A2.1B, A2.1C, A2.2, or A2.3) and will appear in sections 2 and 3 in the gray portion of lower summary table for the particular pathway:

- **A2.1B:** Direct Contact Pathway – Unrestricted Land Use; Method B
- **A2.1C:** Direct Contact Pathway – Industrial Land Use; Method C
- **A2.2:** Leaching Pathway (Protection of Ground Water Quality)
- **A2.3:** Vapor Pathway (Protection of Air Quality)

Each sheet provides additional observations and “what if” options as described further in later sections.

3.7.4 Advanced Features (Optional)

Every worksheet in the **MTCATPH Workbook** provides a means for observing and evaluating the results based on the entered data. The following discussion of these observations and analytical tools are **organized by worksheet**. As described previously, the Workbook allows the user to examine **two situations**.

- **First**, the Workbook provides the tools necessary to calculate the risk (carcinogenic and non-carcinogenic) under current conditions. To calculate the risk under current conditions, the Workbook requires the user to enter a measured soil or ground water concentration. The Workbook then executes a “forward” calculation using the equations in the regulation and solving for risk.
- **Second**, the Workbook provides the tools necessary to calculate protective concentrations under Method B and Method C. The Workbook “back-calculates” a protective concentration based on the target risk levels (carcinogenic and non-carcinogenic) set forth in the regulation.

Confirmation Step to Verify Calculation Results: The user can verify information shown in the Calculation Results Summary table discussed in Section 3.7.4 by conducting the following steps:

- **Evaluation of Soil Direct Contact:** open “A2. 1B” (for Method B) or “A2. 1C” (for Method C) Worksheet depending upon the applicable Method.
 - a. Click “Test Adjusted TPH Soil Conc” button and enter the value of “maximum protective Soil TPH Concentration to pass” shown in outputs (refer to Section 3.7.3 of “Soil Cleanup Levels: Calculation Result Summary”).
 - b. Confirm the calculation result is “Pass.” If a “Fail” sign appears, then users need to find the maximum soil TPH concentration to pass by entering (fine-tuning) specific soil TPH concentrations and check the results.
- **Evaluation of Soil to Ground Water:** open “A2. 2” Worksheet Based on Calculated Method B Potable Ground Water Cleanup Level (which is based on protection of human health and does not account for several site-specific factors):
 - a. Click on the button “Calculate or Test” and the subsequent button “TPH Test” and enter the value of “maximum protective Soil TPH Concentration to pass” shown in outputs (refer to Section 3.7.3 of “Soil Cleanup Levels: Calculation Result Summary”).
 - b. Confirm that the calculation result is “Pass.” If a “Fail” sign appears, then users need to find the maximum soil TPH concentration to pass by entering (fine-tuning) specific soil TPH concentrations and check the results.

Based on Adjusted Site-Specific TPH Ground Water Cleanup Level:

- a. Click on the button “Calculate or Test” and the subsequent button “TPH Test” and enter the value of “Corresponding soil TPH concentration” shown in outputs (refer to Section 3.7.3 of “Soil Cleanup Levels: Calculation Result Summary.”)
- b. Confirm that “Predicted TPH @well” would match with target TPH ground water concentration previously entered in the data sheet (A1). If both do not match, users need to find the soil TPH concentration by entering (fine-tuning) specific soil TPH concentrations and check the results.

3.7.4.1 Sheet A2. 1B – Evaluation of the Direct Contact Pathway under Method B (Unrestricted Land Use)

Current Condition: Results for the current condition (based on the soil data entered in Sheet A) are shown in two places in the sheet. First, a summary box (shown in Figure 3-9) is located in the upper right-hand portion of the sheet.

Figure 3-9 Test Current Condition Box

TEST CURRENT CONDITION	
Measured TPH Soil Conc, mg/kg=	845.450
HI=	2.609E-01
RISK=	2.751E-06
Pass or Fail? Pass	

This box provides the total concentration (mg/kg) of all the TPH fractions and compounds entered by the user, and the corresponding hazard index and cancer risk. In this particular example, the Pass/Fail indicates a “Pass” since both the carcinogenic and non-carcinogenic risks do not exceed the allowable level established for Method B for mixtures under 173-340-708(5).

Second, the three columns located to the right of the data entry columns (heading: “Current Condition”) provide the detail necessary to determine which fractions and chemicals are contributing to the hazard index and carcinogenic risk. The sums of the hazard quotient and total carcinogenic risk are shown at the bottom of their respective columns.

Pass/Fail Criteria: A failure is registered IF either of the following conditions is true:

- For a single hazardous substance (TPH component and a cPAHs mixture), the hazard quotient exceeds 1 or the carcinogenic risk exceeds 1×10^{-6} ; or
- For total site risk (TPH mixture), the hazard index exceeds 1 or the sum of the carcinogenic risk exceeds 1×10^{-5} .

Calculating Protective Condition: This tool allows the user to calculate protective TPH soil concentration based on several soil quality criteria. The Workbook uses the same composition ratio as for the measured data. See Figure 3-10.


Figure 3-10 Calculate Protective Condition Box

CALCULATE PROTECTIVE CONDITION	
<p style="color: #800080; font-size: small;">This tool allows the user to calculate protective TPH soil concentration based on various soil quality criteria. The Workbook uses the same composition ratio as for the measured data.</p>	<div style="border: 1px solid black; background-color: #D2B48C; padding: 10px; width: fit-content; margin: 0 auto;"> Calculate Protective TPH Soil Conc </div>
<p>Selected Criterion: @Benzene Risk=1E-6</p> <p>Most Stringent? NO</p>	
<p>Protective TPH Soil Conc, mg/kg = 511801.33</p> <p>HI = 1.58E+02</p> <p>RISK = 1.67E-03</p>	

The “**Calculate Protective TPH Soil Conc**” back-calculates a TPH concentration (using the relative fraction/compound percentages based on the entered data) that meets the non-carcinogenic hazard index of 1, or the 1×10^{-5} carcinogenic risk for multiple hazardous substances (total site risk) depending on the soil quality criterion buttons selected. See floating buttons shown in Figure 3-11. The result is immediately shown in the box below the buttons.

For all various conditions, the details are provided in the four columns to the left under the heading “Adjusted Condition.” The column shows the soil concentration corresponding to the total “adjusted” concentration and the corresponding hazard index or carcinogenic risk. The pass/fail criteria are the same as those for the “Test current condition”.

Figure 3-11 Floating Calculation Buttons

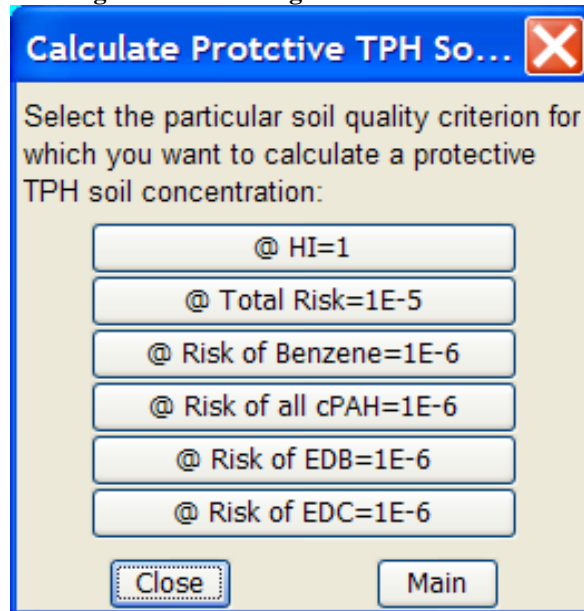


Testing Adjusted Condition: The button “Test Adjusted TPH Soil Conc” allows the user to enter a specific concentration and check the results.

One of the most useful tools included in the Workbook is the ability to determine, based on the relative composition ratio of the sample, what TPH concentration would meet the risk-based limitations. This concentration would be the “target soil cleanup level.” This can be done using the buttons and the box located at the right low portion of the sheet as shown in Figure 3-12 and Figure 3-13.


Figure 3-12 Test Adjusted Condition Box

TEST ADJUSTED CONDITION	
<p>This tool allows the user to test whether a particular TPH soil concentration is protective of human health. The Workbook uses the same composition ratio as for the measured data.</p>	Test Adjusted TPH Soil Conc
Tested TPH Soil Conc, mg/kg =	
HI =	
RISK =	
Pass or Fail?	

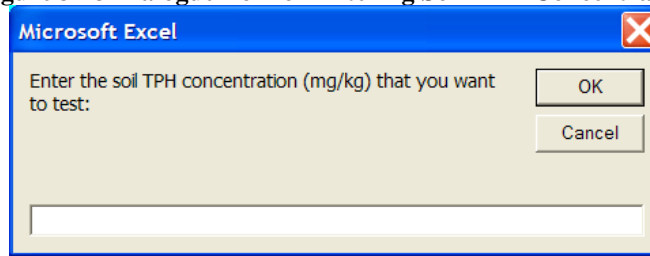Figure 3-13 Dialogue Box for Entering Soil TPH Concentration

3.7.4.2 *Sheet A2. 1C – Evaluation of the Direct Contact Pathway under Method C (Industrial Land Use)*

The sheet for evaluating the direct contact pathway under Method C (industrial land use) has all the same features as described in **Section 3.7.4.1** above for the unrestricted land use scenario. Under Method C, cleanup levels are calculated the same as under Method B, except that concentrations that are protective of human health are calculated using a less stringent target cancer risk for individual hazardous substances (1×10^{-5}) and less stringent default exposure assumptions (see **Appendix B** and **Figure 3-14**).

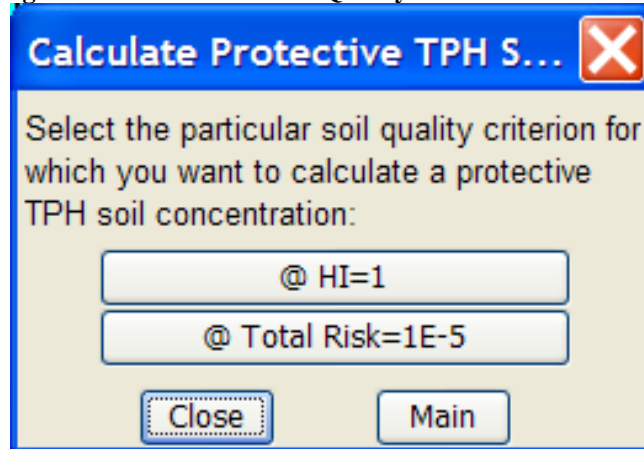Figure 3-14 Buttons for Soil Quality Criteria for Method C

3.7.4.3 *Sheet A2.2 – Evaluation of the Leaching Pathway (Protection of Ground Water)*

Sheet A2.2 provides additional detail regarding the evaluation of the leaching pathway (protection of ground water). The sheet is divided into different columns and boxes that can be used to view results or develop “what-if” analyses. These areas are shown in the figure on the next page.

Current Condition: When first viewed, the results displayed are for the current condition. Check to see that the total soil concentration being tested at the bottom of the column is the same as the total concentration listed in Sheet A1.

The information provided in the columns (from left to right) is as follows:

- **Measured Soil Concentration – dry weight basis (mg/kg):** These concentrations correspond to the data entered in Sheet A. It is provided for reference and is not changed by any of the “adjusted condition” calculations.
- **Ground Water Cleanup Level – Method A (ug/L):** These concentrations are the Method A ground water cleanup levels listed in Table 720-1. The Method A cleanup level is used to determine whether a chemical meets applicable requirements under state and federal law (ARARs) and the risk criteria for individual hazardous substances under Method B (RISK = 1×10^{-6} for carcinogens and HQ = 1 for non-carcinogens). The Method A cleanup levels in Table 720-1 were calculated under Method B and account for ARARs, protection of human health, natural background concentrations, and practical quantitation limits.
- **Predicted Concentration at Well (ug/L):** The predicted ground water concentration based on the partitioning equations presented in Appendix C.
- **Hazard Quotient (HQ) at Well:** The hazard quotient for each fraction or hazardous substance that contributes to the total hazard index for exposure to potable ground water (sum at bottom of column).
- **Risk at Well:** The carcinogenic risk for each fraction or hazardous substance that contributes to the total cancer risk is summed at the bottom of the column.
- **Pass or Fail:** If any predicted individual chemical concentration at the well exceeds the applicable Method A ground water cleanup level, a “FAIL” is indicated in the column. Also, at the bottom of the column, a “FAIL” is indicated if the hazard index exceeds 1 or the total cancer risk exceeds 1×10^{-5} , or when a predicted concentration at a well becomes higher than the ground water cleanup levels specified.

Also, the site-specific hydrogeological properties and ground water concentration protective of surface water quality (if any) previously entered are shown at the right upper corner of worksheet A2.2.

Calculating Protective Condition for Ground Water Quality: The “Adjusted Condition” is displayed at the request of the user by clicking the “Calculate or Test” button. See Figure 3-15. The user may calculate the protective soil concentration by selecting one of the following back-calculation buttons on the floating menu that pops up over the worksheet as shown in Figure 3-16.

Figure 3-15 Protective Condition or Testing Box

CALCULATE PROTECTIVE CONDITION OR TEST ADJUSTED CONDITION	
<input type="button" value="Calculate or Test"/>	
TPH Test button used.	
Pass or Fail? Pass	
Tested TPH Soil Conc, mg/kg = 100.00	
Predicted TPH GW Conc, ug/L = 1.23E+02	
RISK @ Well = 2.67E-07	
HI @ Well = 2.11E-01	

Figure 3-16 Floating Buttons for Soil-to-Ground Water Exposure Pathway

CALCULATE PROTECTIVE CONDITION OR TEST ADJUSTED CONDITION		
<p><u>Calculate Protective Condition for Method B Potable Ground Water Quality (Human Health):</u> This tool allows the user to calculate a protective TPH soil concentration based on various potable ground water quality criteria. The Workbook uses the same composition ratio as for the measured data and the same hydrogeological data previously entered by the user.</p> <p>Select the particular potable ground water quality criterion for which you want to calculate a protective TPH soil concentration:</p> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">@ HI=1</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">@ Total Risk=1E-5</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">@ Risk=1E-6</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">@ Benzene MCL=5ug/L</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">@ MTBE=20ug/L</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">@ Risk of all cPAHs=1E-5</div> <div style="border: 1px solid black; padding: 2px;">@ Naphthalene=160ug/L</div>	<p><u>Test Adjusted Condition:</u> This tool allows the user to test whether a particular TPH soil concentration is protective of ground water quality. The Workbook uses the same composition ratio as for the measured data and the same hydrogeological data previously entered by the user.</p> <div style="border: 1px dashed black; padding: 5px; margin-bottom: 10px;"> 1. For a complete calculation with "Solver Function", click the button right below. <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 5px;"> TPH Test </div> </div> <div style="border: 1px dashed black; padding: 5px;"> 2. If the button right above does not work, then use "Alternative" right below. For an alternative calculation with "Goal Seek" function, the volume of NAPL formed is not considered. The calculation error is within 0.1% with this alternative when comparing the complete solution. <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 5px;"> TPH Test (Alternative) </div> </div>	<p><u>Calculate Protective Soil Condition for Adjusted Site-specific TPH Ground Water Cleanup Level previously entered:</u> This tool allows the user to calculate a protective TPH soil concentration based on the site-specific Target TPH ground water concentration that is previously adjusted and entered by the user.</p> <p>This target TPH ground water concentration could be the value that is protective of surface water quality or non-potable ground water quality, etc.</p> <p>The Worksheet uses the same composition ratio as for the measured data and the same hydrogeological data previously entered by the user.</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> Protection of Target TPH GW Conc. </div>
<div style="display: flex; justify-content: space-around;"> <input type="button" value="Close"/> <input type="button" value="Main"/> </div>		

This tool allows the user to calculate a protective TPH soil concentration based on various ground water quality criteria. The worksheet uses the same composition ratio as for the measured data and the same hydrogeological data previously entered by the user.

Select the particular potable ground water quality criterion for which you want to calculate a protective TPH soil concentration:

- Target Soil Cleanup Level @ HI = 1

- Target Soil Cleanup Level @ $RISK = 1 \times 10^{-5}$
- Target Soil Cleanup Level based on benzene ground water cleanup level
- Target Soil Cleanup Level based on MTBE ground water cleanup level
- Target Soil Cleanup Level based on cPAHs (@ Risk 1×10^{-5}) ground water cleanup level

Testing Adjusted Condition: Using the buttons “TPH Test” or “TPH Test (Alternative)”, the adjusted concentration is scaled up or down (by proportionality) based on the same relative percentages as those for the actual measured soil concentrations.

“TPH Test” Button allows the user to test whether a particular TPH soil concentration is protective of ground water quality. The Workbook uses the same composition ratio as for the measured data and the same hydrogeological data previously entered by the user. An MS Excel built-in function “Solver” is used for the exact calculation with this “TPH Test” button.

If the button “TPH Test” does not work properly, then use “TPH Test (Alternative)” right below. For an alternative calculation with "Goal Seek" function, the volume of NAPL formed is not considered. The calculation error is within 0.1% with this alternative when comparing the complete solution. This is an alternative back-up button.

Calculating Protective Soil Condition for Adjusted Site-Specific TPH Ground Water Cleanup Level previously entered: This tool allows the user to calculate a protective TPH soil concentration based on the adjusted site-specific target TPH ground water concentration that was previously entered by the user. Instead of entering the adjusted potable ground water cleanup level, the user may also have entered a non-potable ground water cleanup level or the ground water concentration that is protective of surface water quality. See Section 3.7.2.5. The Worksheet uses the same composition ratio as for the measured data and the same hydrogeological data previously entered by the user.

Detailed Model Results: Figure 3-17 contains detailed model simulation results such as:

- Type of model used for computation;
- Initial Weighted Average Molecular Weight of NAPL;
- Equilibrated Weighted Average MW of NAPL;
- Initial Weighted Average Density of NAPL;
- Volumetric NAPL Content;
- NAPL Saturation (% by volume);
- TPH concentration when air space is filled with petroleum product at 100%; and
- Mass Distribution Pattern @ 4-phase in soil pore system; in water, air, solid, NAPL phases.

Figure 3-17 Model Results

DEDAILED MODEL RESULTS		TPH Range Test
Type of model used for computation:	4-Phase Model	
Computation completed?	Yes!	
Initial Weighted Average MW of NAPL, g/mol:	178.7	
Equilibrated Weighted Average MW of NAPL, g/mol:	201.5	
Initial Weighted Average Density of NAPL, kg/L:	0.836	
Volumetric NAPL Content, θ_{NAPL} :	1.1E-04	
NAPL Saturation (%), θ_{NAPL}/n :	0.03%	
100% NAPL, mg/kg	72480.8	
Mass Distribution Pattern @ 4-phase in soil pore system:	Mass Balance Pattern	
Total Mass distributed in Water Phase: 0.99%		in Solid: 35.97%
Total Mass distributed in Air Phase: 2.70%		in NAPL: 60.34%

Additional buttons provided at this A2.2 Worksheet are:

- TPH Range Test:** This button lets the user conduct the partitioning equilibrium calculation for the graphical output for the range of user-defined soil concentration. The user can view five trend-lines to display for:
 - Soil TPH concentration vs. Predicted TPH concentration at well: See Figure 3-18
 - Soil TPH concentration vs. Predicted HI at well
 - Soil TPH concentration vs. Predicted Risk at well
 - Soil TPH concentration vs. Predicted concentration of each TPH component and hazardous substance at well: See Figure 3-19
 - Soil TPH concentration vs. Predicted TPH mass distribution in each soil matrix (at four phases): See Figure 3-20

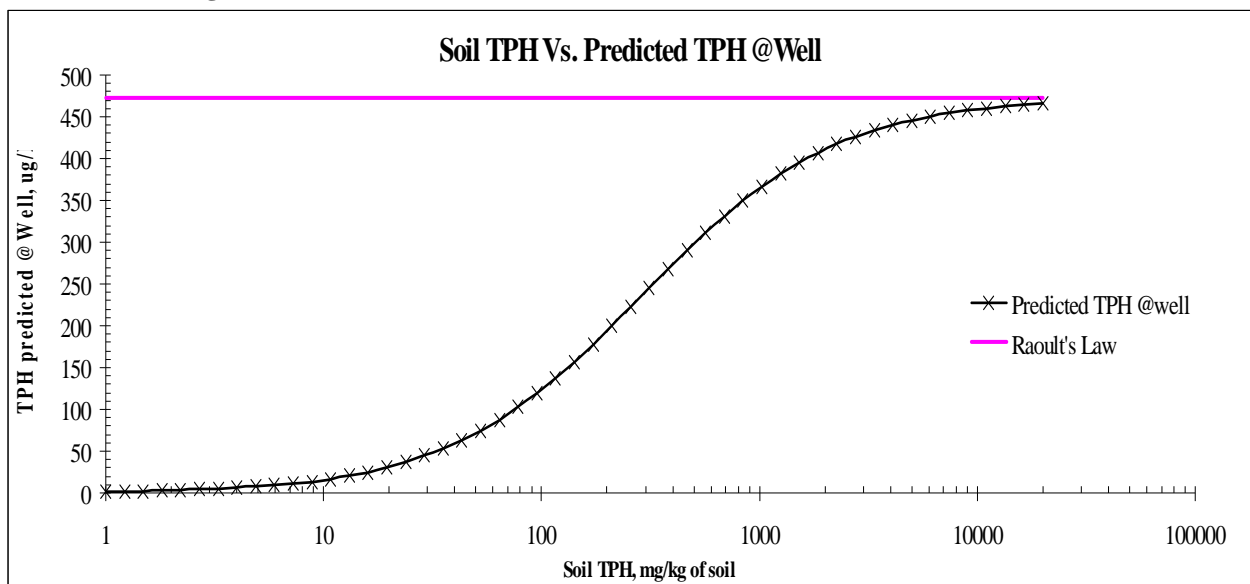
Figure 3-18 Soil Vs. Ground Water Concentration Predicted for TPH

Figure 3-19 Soil Vs. Ground Water Concentration Predicted for each Component


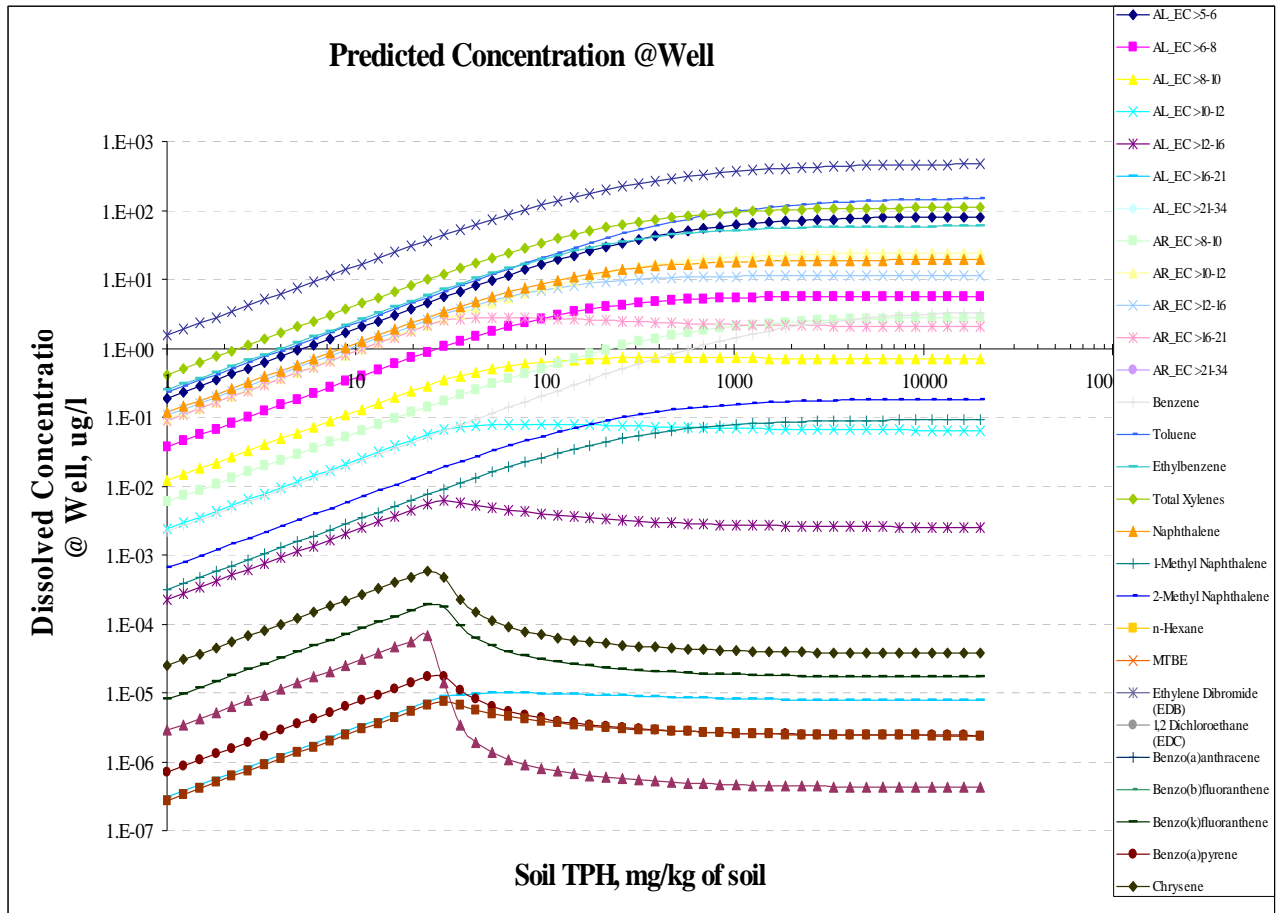


Figure 3-20 TPH Mass Distribution in Soil Matrix

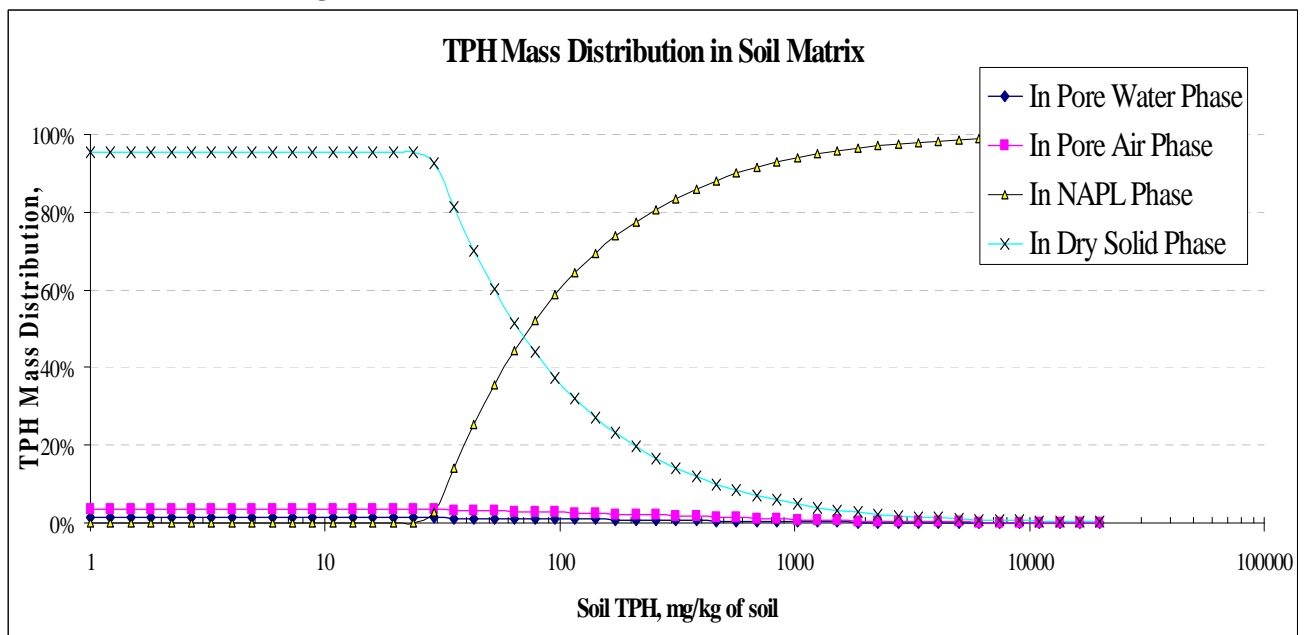

- **Mass Balance Pattern:** This button allows the user to evaluate the pattern of mass balance with the soil TPH concentration given/tested under the same composition ratio as for the measured data and the same hydrogeological data previously entered by the user. See Figure 3-21. Three options that the user can choose are:
 - Mass Distribution Pattern for each Component @ 4-phase: See Figure 3-22
 - Component Mass Distribution @ Soil & Well
 - Total TPH Mass Distribution in 4-phase @ Well

Figure 3-21 Mass Balance Navigator


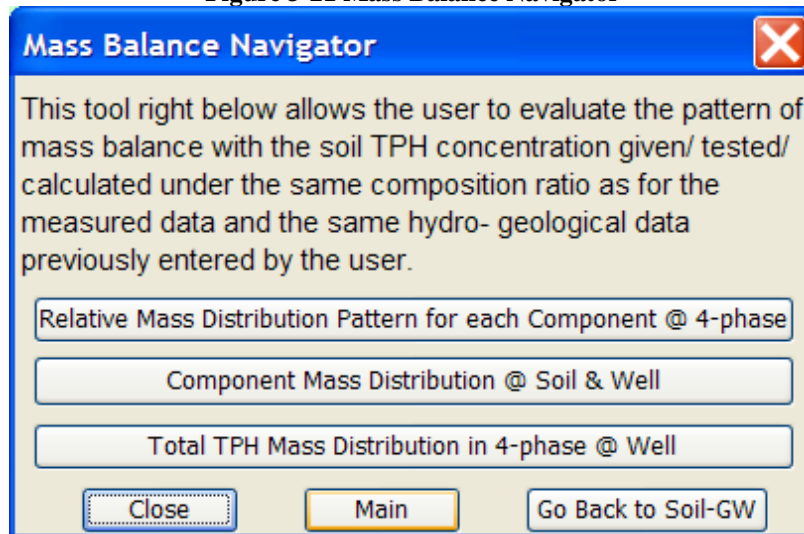


Figure 3-22 Mass Distribution of Individual Component in Soil Matrix

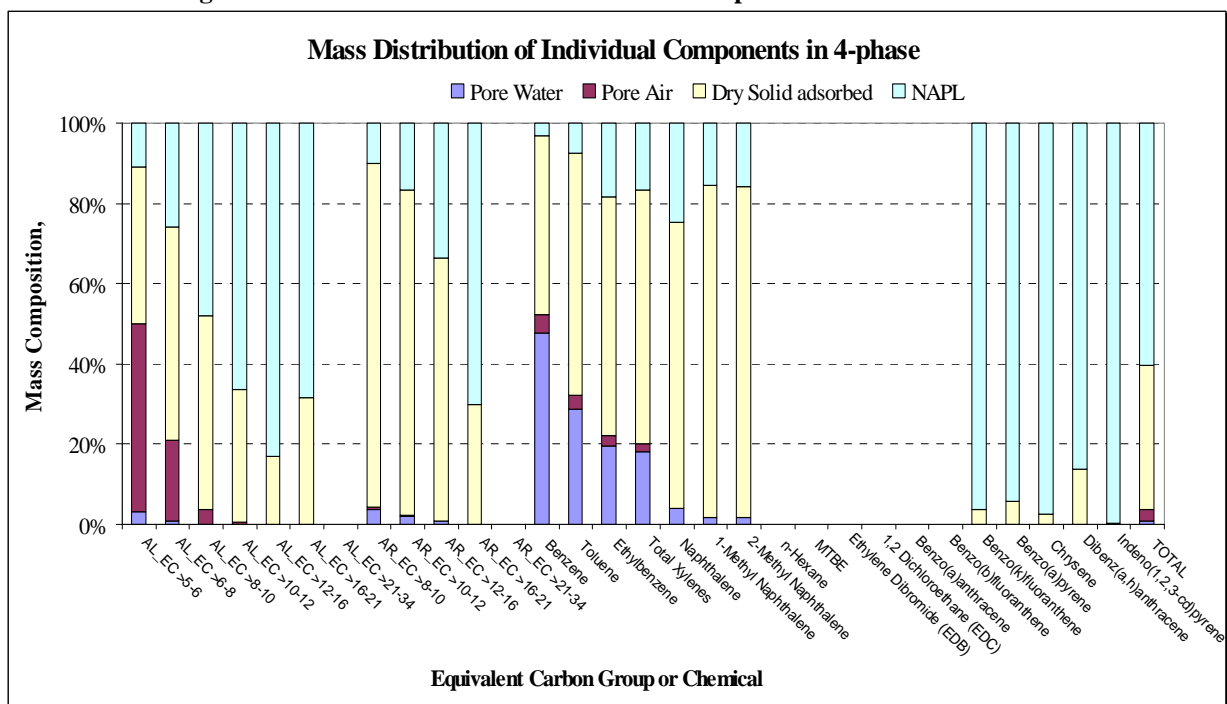

3.7.5 Output-Adjusting the Results (Optional)

As noted previously (see **Section 3.3**), the soil cleanup levels calculated using the soil worksheet **DO NOT** account for several factors. Consequently, to establish a soil cleanup level under the regulation, the cleanup level calculated using the worksheet may need to be manually adjusted to account for the following:


- Concentrations established under applicable state and federal laws (WAC 173-340-740(3)(b)(i) or 173-340-745(5)(b)(i));
- Terrestrial ecological impacts (see WAC 173-340-740(3)(b)(ii) or 173-340-745(5)(b)(ii));
- Impacts on air quality (vapor pathway) (see WAC 173-340-740(3)(b)(iii)(C), (c)(iv) or 173-340-745(5)(b)(iii)(C), (c)(iv));
- Residual saturation (see WAC 173-340-747(2)(b) and (10)); and
- Total site risk (see WAC 173-340-740(5)(a) or 173-340-745(6)(a)).

3.8 Calculating Ground Water TPH Cleanup Levels

3.8.1 Quick Instruction on How to Calculate the Ground Water TPH Cleanup Levels

See Figure 3-23.

Figure 3-23 Quick Instruction for Calculating TPH Ground Water Cleanup Levels

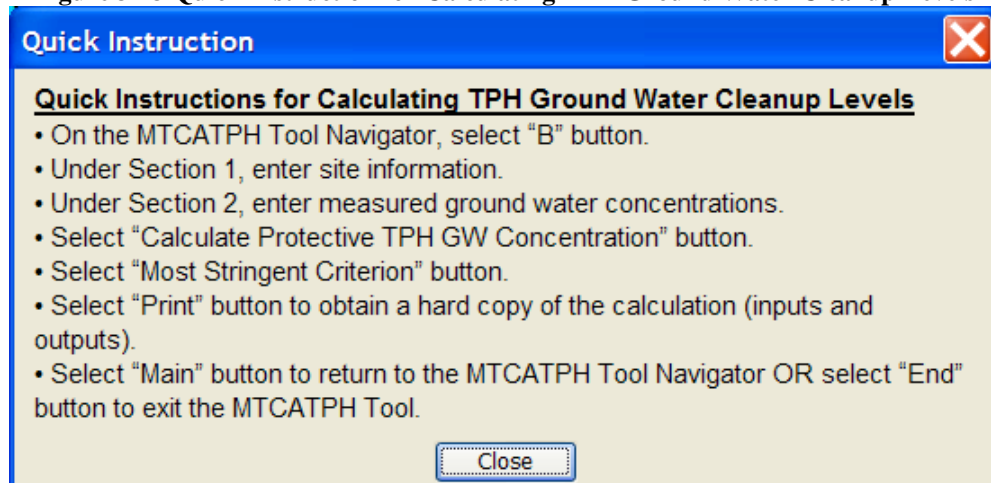

3.8.2 Entering Data- Input

3.8.2.1 Accessing the Ground Water Worksheet

In the MTCATPH Workbook Navigator Box, select Worksheet B “Calculating Ground Water TPH Cleanup Levels.”

3.8.2.2 Input Data – Part 1: Enter Logistical Site Information

As shown in Figure 3-24, enter the logistical information on the site to be evaluated. Enter descriptive text for the identification of a particular site (or a sample or a project) including date, site name, sample name, and additional information if necessary.

Figure 3-24 Entering Site Information

1. Enter Site Information	
Date:	10/30/2005
Site Name:	xyz site; VPH and EPH data analysis; ND = zero out
Sample info:	GW sample: MW-8; sample type: N

3.8.2.3 Input Data – Pat 2: Enter Measured Ground Water Concentrations

The ground water worksheet (illustrated in Figure 3-25) requires the user to input analytical data (ground water concentrations: µg/L) in the non-shaded (white) cells for

the chemicals of concern and EC groups appropriate for the type of TPH mixture being evaluated.

Figure 3-25 Entering Ground Water Concentration Measured

2. Enter Ground Water Concentration Measured		
Chemical of Concern or EC Group	Measured GW Conc	GW Cleanup Level
	ug/L	ug/L
<u>Petroleum EC Fraction</u>		
AL_EC >5-6	0	
AL_EC >6-8		
AL_EC >8-10	1	
AL_EC >10-12	1	
AL_EC >12-16	1	
AL_EC >16-21	1	
AL_EC >21-34	1	
AR_EC >8-10	1	
AR_EC >10-12	1	
AR_EC >12-16		
AR_EC >16-21	1	
AR_EC >21-34	0	
Benzene	7	5
Toluene	23	1000
Ethylbenzene	23	700
Total Xylenes	200	1000
Naphthalene	5	
1-Methyl Naphthalene	2	
2-Methyl Naphthalene	22	
n-Hexane	2	
MTBE	1	20
Ethylene Dibromide (EDB)		0.01
1,2 Dichloroethane (EDC)		5
Benzo(a)anthracene	0	for
Benzo(b)fluoranthene	0.03	all
Benzo(k)fluoranthene	0	cPAHs
Benzo(a)pyrene	0.02	Risk =
Chrysene	0.2	1E-05
Dibenz(a,h)anthracene	0	
Indeno(1,2,3-cd)pyrene	0	
Sum	293.25	

Be sure that the correct and consistent units are used for all chemical concentrations (micrograms/liter = ug/L = ppb) and that you use the same number of significant figures as reported by the laboratory. Enter zero (0) for substances that are not analyzed (i.e., for gasoline, you probably would not test for the cPAHs, so these entries would all be zero). For values below the method detection limit, substitute one-half the method detection limit. For values above the method detection limit but below the practical quantitation limit, substitute the method detection limit.

For a hazardous substance or petroleum fraction that has never been detected in any sample at a site and these substances are not suspected of being present at the site based on site history or other knowledge, enter “0” for that value. If the sample has been analyzed using both the VPH (Volatile Petroleum Hydrocarbons) and EPH (Extractable Petroleum Hydrocarbons) methods, use the higher value for the fraction where there is an overlap between these two methods.

All entries must be numeric values. A text entry will cause a #VALUE# error to appear in one or more columns to the right. This must be corrected or the Workbook will not execute its calculations correctly.

Note that the right-hand column provides, where available, the listed Method A ground water cleanup levels for certain chemicals to facilitate direct comparison.

Avoid Double Counting: Refer to Section 3.7.2 for details.

THIS COMPLETES DATA ENTRY FOR THE GROUND WATER WORKSHEET. SAVE YOUR WORK BEFORE CONTINUING.

3.8.3 Executing the Calculation and Analyzing the Output

Click on **MAIN** in the upper right corner to return to the navigation tool. Open the MTCATPH Tool Navigator and click the button “B.”

Current Condition: Results for the current condition (with ground water concentration measured) are shown in two places in the sheet. First, a summary box (shown in Figure 3-26) is located in the upper right-hand portion of the sheet.

Figure 3-26 Testing Current Condition Box

TEST CURRENT CONDITION	
Measured TPH GW Conc, ug/L =	293.25
HI =	1.164E+00
RISK =	1.089E-05
Pass or Fail?	Fail

Figure 3-26 provides the total concentration (µg/L) of all the TPH fractions and compounds entered by the user, and the corresponding hazard index and cancer risk. In this particular example, the Pass/Fail indicates a “Fail” since both the carcinogenic and

non-carcinogenic risks exceed the acceptable levels for total site risk ($HI = 1$ and $RISK = 1 \times 10^{-5}$).

Second, the three columns located to the right of the data entry columns (with the heading “Current Condition”) provide the detail necessary to determine why the sample has failed and which fractions and chemicals are contributing to the hazard index and carcinogenic risk. The sums of the hazard quotient and total carcinogenic risk are shown at the bottom of their respective columns.

Pass/Fail Criteria: A failure is registered IF either of the following conditions is true:

- For a single hazardous substance (TPH component), the hazard quotient exceeds 1 or the carcinogenic risk exceeds 1×10^{-6} (i.e., the ground water concentration exceeds the applicable Method A concentration (listed immediately to the right of the data entry field)); or
- For total site risk (TPH mixture), the hazard index exceeds 1 or the sum of the carcinogenic risk exceeds 1×10^{-5} .

Calculating Protective Condition: This tool allows the user to calculate a protective TPH ground water concentration based on various ground water quality criteria. The Workbook uses the same composition ratio as for the measured data. See Figure 3-27

Figure 3-27 Calculate Protective Condition Box

CALCULATE PROTECTIVE CONDITION	
<p>This tool allows the user to calculate a protective TPH ground water concentration based on various ground water quality criteria. The Workbook uses the same composition ratio as for the measured data.</p>	<p>Calculate Protective TPH GW Conc</p>
<p>Selected Criterion: Benzene MCL = 5 ug/L</p>	
Most Stringent?	YES
<p>Protective TPH GW Conc, ug/L = 209.46</p> <p>HI = 8.31E-01</p> <p>RISK = 7.78E-06</p>	

The Button “Calculate Protective TPH GW Conc” allows the user select the particular water quality criterion for which the user wants to calculate a protective TPH ground water conc. This button displays seven tabs to choose as shown in Figure 3-28. Click the “@ Most stringent criterion” button. Then click “Print” button for a hardcopy of inputs and outputs; this will be used for the confirmation. Click the “Test Adjusted TPH GW Conc” button and enter the value of protective TPH ground water concentration which is maximum ground water TPH concentration to pass shown in the output table. Confirm that the calculation result is “Pass.” If the “Fail” sign appears, then users need to find the maximum ground water TPH concentration to pass by entering (fine-tuning) specific ground water TPH concentrations and check the results.

Figure 3-28 Floating Buttons for Calculating Protective Ground Water TPH

These **buttons** back-calculate a TPH concentration (using the relative fraction/ compound percentages based on the entered data) that meets various criteria shown below. The result is immediately shown in the box below the buttons.

- Total Ground Water TPH Cleanup Level @ HI = 1
- Total Ground Water TPH Cleanup Level @ RISK = 1×10^{-5}
- Total Ground Water TPH Cleanup Level based on benzene ground water cleanup level
- Total Ground Water TPH Cleanup Level based on MTBE ground water cleanup level
- Total Ground Water TPH Cleanup Level based on cPAHs (@Risk 1×10^{-5}) ground water cleanup level

For all “adjusted” conditions, the details are provided in the four columns to the left under the heading “Adjusted Condition.” The column shows the ground water concentration corresponding to the total “adjusted” concentration and the corresponding hazard index or carcinogenic risk. The pass/fail criteria are the same as those for the “current condition.”

Testing Adjusted Condition: One of the most useful tools included in the Workbook is the ability to determine, based on the relative composition of the sample, what TPH concentration would meet the risk-based limitations. This concentration would be the “target ground water cleanup level.” This can be done using the buttons and the box located at the right side of the sheet as shown in Figure 3-29.

Figure 3-29 Test Adjusted Condition Box

TEST ADJUSTED CONDITION	
This tool allows the user to test whether a particular TPH soil concentration is protective of human health. The Workbook uses the same composition ratio as for the measured data.	Test Adjusted TPH GW Conc
Tested TPH GW Conc, ug/L= 100 HI= 3.97E-01 RISK= 3.71E-06	
Pass or Fail? Pass	

The button “Test Adjusted TPH GW Conc” allows the user to enter a specific concentration and the results.

3.8.4 Output-Adjusting the Results

As noted previously (see **Section 3.4.2**), the potable ground water cleanup levels calculated using the ground water worksheet **DO NOT** account for several factors. Consequently, to establish a potable ground water cleanup level under the regulation, the cleanup level calculated using the worksheet may need to be manually adjusted to account for the following:

- Concentrations based on potential surface water impacts (see WAC 173-340-720(4)(b)(ii) and (5)(b)(ii));
- Nonaqueous phase liquid (NAPL) limitation (see WAC 173-340-720(7)(d)); and
- Total site risk (see WAC 173-340-720(7)(a)).

Appendix A

Equations and Default Values for Calculating Potable Ground Water Cleanup Levels

Equation 720-1: Potable Ground Water Cleanup Levels – Noncarcinogens

$$\text{Potable Ground Water Cleanup Level (ug / L)} = \frac{RfD_o \times ABW \times UCF \times HQ \times AT}{DWIR \times INH \times DWF \times ED}$$

Parameter	Definition	Default Value		Units
		Method B	Method C	
<i>RfD_o</i>	Oral Reference Dose	Chemical-specific	Chemical-specific	mg/kg-day
<i>ABW</i>	Average Body Weight over the exposure duration	16	70	kg
<i>UCF</i>	Unit Conversion Factor	1,000	1,000	ug/mg
<i>HQ</i>	Hazard Quotient	1.0	1.0	unitless
<i>AT</i>	Averaging Time	6	6	years
<i>DWIR</i>	Drinking Water Ingestion Rate	1.0	2.0	L/day
<i>INH</i>	Inhalation Correction Factor (1)	See Note (1)	See Note (1)	unitless
<i>DWF</i>	Drinking Water Fraction	1.0	1.0	unitless
<i>ED</i>	Exposure Duration	6	6	years

Footnotes:

(1) Use value of 2 for volatile organic compounds and 1 for all other substances.

Equation 720-2: Potable Ground Water Cleanup Levels – Carcinogens

$$\text{Potable Ground Water Cleanup Level (ug / L)} = \frac{RISK \times ABW \times AT \times UCF}{CPF_o \times DWIR \times ED \times INH \times DWF}$$

Parameter	Definition	Default Value		Units
		Method B	Method C	
<i>RISK</i>	Acceptable Cancer Risk Level	1.0E-6	1.0E-5	unitless
<i>ABW</i>	Average Body Weight over the exposure duration	70	70	kg
<i>AT</i>	Averaging Time	75	75	years
<i>UCF</i>	Unit Conversion Factor	1,000	1,000	ug/mg
<i>CPF_o</i>	Oral Carcinogenic Potency Factor	Chemical-specific	Chemical-specific	kg-day/mg
<i>DWIR</i>	Drinking Water Ingestion Rate	2.0	2.0	L/day
<i>INH</i>	Inhalation Correction Factor	See Note (1)	See Note (1)	unitless
<i>DWF</i>	Drinking Water Fraction	1.0	1.0	unitless
<i>ED</i>	Exposure Duration	30	30	years

Footnotes:

(1) Use value of 2 for volatile organic compounds and 1 for all other substances.

**Equation 720-3: Potable Ground Water Cleanup Levels – Petroleum Mixtures
(Non-Carcinogenic Risk)**

$$C_w = \frac{HI \times AT}{\left[\frac{DWIR \times DWF \times ED}{ABW \times UCF} \right] \times \sum_{i=1}^n \frac{F_{(i)} \times INH_{(i)}}{RfD_{o(i)}}$$

Parameter	Definition	Default Value		Units
		Method B	Method C	
C_w	TPH ground water cleanup level	---	---	ug/L
HI	Hazard Index	1.0	1.0	unitless
AT	Averaging Time	6	6	years
$DWIR$	Drinking Water Ingestion Rate	1.0	2.0	L/day
DWF	Drinking Water Fraction	1.0	1.0	unitless
ED	Exposure Duration	6	6	years
ABW	Average Body Weight over the exposure duration	16	70	kg
UCF	Unit Conversion Factor	1,000	1,000	ug/mg
$F_{(i)}$	Fraction (by weight) of petroleum component (i)	Chemical-specific	Chemical-specific	unitless
$INH_{(i)}$	Inhalation Correction Factor for petroleum component (i)	See Note (1)	See Note (1)	unitless
$RfD_{o(i)}$	Oral Reference Dose of Petroleum component (i)	Chemical-specific	Chemical-specific	mg/kg-day
n	The number of petroleum components (petroleum fractions plus volatile organic compounds with an RfD_o) present in the petroleum mixture (See Table 830-1.)	Mixture-specific	Mixture-specific	unitless

Footnotes:

(1) Use value of 2 for volatile organic compounds and 1 for all other substances.

Appendix B

Equations and Default Values for Calculating Protective Soil Concentrations based on the Direct Contact Pathway

Equations 740-1 and 745-1: Soil Direct Contact (Ingestion Only) – Noncarcinogens

$$\text{Soil Cleanup Level (mg / kg)} = \frac{RfD_o \times ABW \times UCF \times HQ \times AT}{SIR \times AB1 \times EF \times ED}$$

Parameter	Definition	Default Value		Units
		Method B Equation 740-1	Method C Equation 745-1	
<i>RfD_o</i>	Oral Reference Dose	Chemical-specific	Chemical-specific	mg/kg-day
<i>ABW</i>	Average Body Weight over the exposure duration	16	70	kg
<i>UCF</i>	Unit Conversion Factor	1.0E+6	1.0E+6	mg/kg
<i>SIR</i>	Soil Ingestion Rate	200	50	mg/day
<i>AB1</i>	Gastrointestinal Absorption fraction	1.0	1.0	unitless
<i>EF</i>	Exposure Frequency	1.0	0.4	unitless
<i>HQ</i>	Hazard Quotient	1.0	1.0	unitless
<i>AT</i>	Averaging Time	6	20	years
<i>ED</i>	Exposure Duration	6	20	years

Equations 740-2 and 745-2: Soil Direct Contact (Ingestion Only) – Carcinogens

$$\text{Soil Cleanup Level (mg / kg)} = \frac{RISK \times ABW \times AT \times UCF}{CPF_o \times SIR \times AB1 \times ED \times EF}$$

Parameter	Definition	Default Value		Units
		Method B Equation 740-2	Method C Equation 745-2	
<i>RISK</i>	Acceptable cancer risk level	1.0E-6	1.0E-5	mg/kg-day
<i>ABW</i>	Average Body Weight over the exposure duration	16	70	kg
<i>UCF</i>	Unit Conversion Factor	1.0E+6	1.0E+6	mg/kg
<i>CPF_o</i>	Oral Carcinogenic Potency Factor	Chemical-specific	Chemical-specific	kg-day/mg
<i>AT</i>	Averaging Time	75	75	years
<i>SIR</i>	Soil Ingestion Rate	200	50	mg/day
<i>AB1</i>	Gastrointestinal Absorption fraction	1.0	1.0	unitless
<i>ED</i>	Exposure Duration	6	20	unitless
<i>EF</i>	Exposure Frequency	1.0	0.4	years

**Equations 740-3 and 745-3: Soil Direct Contact (Ingestion + Dermal) –
Petroleum Mixtures (Non-Carcinogenic Risk)**

$$C_{soil} = \frac{HI \times ABW \times AT}{EF \times ED \times \left[\left(\frac{SIR \times AB1}{10^6 \text{ mg / kg}} \sum_{i=1}^n \frac{F_{(i)}}{RfD_{o(i)}} \right) + \left(\frac{SA \times AF}{10^6 \text{ mg / kg}} \sum_{i=1}^n \frac{F_{(i)} \times ABS_{d(i)}}{RfD_{d(i)}} \right) \right]}$$

Parameter	Definition	Default Value		Units
		Method B Equation 740-3	Method C Equation 745-3	
<i>C_{soil}</i>	TPH soil cleanup level	---	---	mg/kg
<i>HI</i>	Hazard Index	1	1	unitless
<i>ABW</i>	Average Body Weight over the exposure duration	16	70	kg
<i>AT</i>	Averaging Time	6.0	20	years
<i>EF</i>	Exposure Frequency	1.0	0.7	unitless
<i>ED</i>	Exposure Duration	6.0	20	years
<i>SIR</i>	Soil Ingestion Rate	200	50	mg/day
<i>AB1</i>	Gastrointestinal Absorption fraction	1.0	1.0	unitless
<i>F_(i)</i>	Fraction (by weight) of petroleum component (i)	Chemical-specific	Chemical-specific	unitless
<i>SA</i>	Dermal Surface Area	2,200	2,500	cm ²
<i>AF</i>	Adherence Factor	0.2	0.2	mg/cm ² -day
<i>ABS_{d(i)}</i>	Dermal Absorption Fraction for petroleum component (i).	See Note (1)	See Note (1)	unitless
<i>RfD_{o(i)}</i>	Oral Reference Dose for petroleum component (i)	Chemical-specific	Chemical-specific	mg/kg-day
<i>RfD_{d(i)}</i>	Dermal Reference Dose for petroleum component (i)	See Note (2)	See Note (2)	mg/kg-day
<i>GI</i>	Gastrointestinal Absorption conversion factor	See Note (3)	See Note (3)	unitless
<i>n</i>	The number of petroleum components (petroleum fractions plus volatile organic compounds with an <i>RfD_o</i>) present in the petroleum mixture (See Table 830-1.)	Mixture-specific	Mixture-specific	unitless

Footnotes:

- (1) May use chemical-specific values or the following defaults: 0.0005 for volatile petroleum components with vapor pressure ≥ benzene; 0.03 for volatile petroleum components with vapor pressure < benzene; 0.1 for other petroleum components.
- (2) Derived by *RfD_o* x *GI* (see note 3).
- (3) May use chemical-specific values or the following defaults: 0.8 for volatile petroleum components; 0.5 for other petroleum components.

Equations 740-4 and 745-4: Soil Direct Contact (Ingestion + Dermal) – Noncarcinogens

For hazardous substances that are part of a petroleum mixture, cleanup levels must be calculated using Equations 740-4 and 745-4 for noncarcinogens and Equations 740-5 and 745-5 for carcinogens. See WAC 173-340-740(3)(b)(iii)(B)(III) and 173-340-745(5)(b)(iii)(B)(III).

For hazardous substances other than petroleum mixtures, cleanup levels for dermal contact with the soil must be evaluated whenever the proposed changes to Equations 740-1/745-1 or 740-2/745-2 would result in a significantly higher soil cleanup level than would be calculated without the proposed changes. See WAC 173-340-740(3)(c)(iii) and 173-340-745(5)(c)(iii).

$$C_{soil} = \frac{HQ \times ABW \times AT}{EF \times ED \times \left[\left(\frac{1}{RfD_o} \times \frac{SIR \times ABI}{10^6 \text{ mg / kg}} \right) + \left(\frac{1}{RfD_d} \times \frac{SA \times AF \times ABS_d}{10^6 \text{ mg / kg}} \right) \right]}$$

Parameter	Definition	Default Value		Units
		Method B Equation 740-4	Method C Equation 745-4	
C_{soil}	Soil cleanup level	---	---	mg/kg
HQ	Hazard Quotient	1	1	unitless
ABW	Average Body Weight over the exposure duration	16	70	kg
AT	Averaging Time	6.0	20	years
EF	Exposure Frequency	1.0	0.7	unitless
ED	Exposure Duration	6.0	20	years
SIR	Soil Ingestion Rate	200	50	mg/day
ABI	Gastrointestinal Absorption fraction	1.0	1.0	unitless
SA	Dermal Surface Area	2,200	2,500	cm ²
AF	Adherence Factor	0.2	0.2	mg/cm ² -day
ABS_d	Dermal Absorption Fraction	See Note (1)	See Note (1)	unitless
RfD_o	Oral Reference Dose	Chemical-specific	Chemical-specific	mg/kg-day
RfD_d	Dermal Reference Dose	See Note (2)	See Note (2)	mg/kg-day
GI	Gastrointestinal Absorption conversion factor	See Note (3)	See Note (3)	unitless

Footnotes:

- (1) May use chemical-specific values or the following defaults: 0.01 for inorganic hazardous substances; 0.0005 for volatile organic compounds with vapor pressure \geq benzene; 0.03 for volatile organic compounds with vapor pressure < benzene; 0.1 for other hazardous substances.
- (2) Derived by $RfD_o \times GI$ (see note 3).
- (3) May use chemical-specific values or the following defaults: 0.2 for inorganic hazardous substances; 0.8 for volatile organic compounds; 0.5 for other organic hazardous substances.

Equations 740-5 and 745-5: Soil Direct Contact (Ingestion + Dermal) – Carcinogens

For hazardous substances that are part of a petroleum mixture, cleanup levels must be calculated using Equations 740-4 and 745-4 for noncarcinogens and Equations 740-5 and 745-5 for carcinogens. See WAC 173-340-740(3)(b)(iii)(B)(III) and 173-340-745(5)(b)(iii)(B)(III).

For hazardous substances other than petroleum mixtures, cleanup levels for dermal contact with the soil must be evaluated whenever the proposed changes to Equations 740-1/745-1 or 740-2/745-2 would result in a significantly higher soil cleanup level than would be calculated without the proposed changes. See WAC 173-340-740(3)(c)(iii) and 173-340-745(5)(c)(iii).

$$C_{soil} = \frac{RISK \times ABW \times AT}{EF \times ED \times \left[\left(\frac{SIR \times ABI \times CPF_o}{10^6 \text{ mg / kg}} \right) + \left(\frac{SA \times AF \times ABS_d \times CPF_d}{10^6 \text{ mg / kg}} \right) \right]}$$

Parameter	Definition	Default Value		Units
		Method B Equation 740-5	Method C Equation 745-5	
C_{soil}	Soil cleanup level	---	---	mg/kg
$RISK$	Acceptable cancer risk level	1.0E-6	1.0E-5	unitless
ABW	Average Body Weight over the exposure duration	16	70	kg
AT	Averaging Time	75	75	years
EF	Exposure Frequency	1.0	0.7	unitless
ED	Exposure Duration	6.0	20	years
SIR	Soil Ingestion Rate	200	50	mg/day
ABI	Gastrointestinal Absorption fraction	1.0	1.0	unitless
SA	Dermal Surface Area	2,200	2,500	cm ²
AF	Adherence Factor	0.2	0.2	mg/cm ² -day
ABS_d	Dermal Absorption Fraction	See Note (1)	See Note (1)	unitless
CPF_o	Oral Cancer Potency Factor	Chemical-specific	Chemical-specific	mg/kg-day
CPF_d	Dermal Cancer Potency Factor	See Note (2)	See Note (2)	mg/kg-day
GI	Gastrointestinal Absorption conversion factor	See Note (3)	See Note (3)	unitless

Footnotes:

- (1) May use chemical-specific values or the following defaults: 0.01 for inorganic hazardous substances; 0.0005 for volatile organic compounds with vapor pressure ≥ benzene; 0.03 for volatile organic compounds with vapor pressure < benzene; 0.1 for other hazardous substances.
- (2) Derived by $CPF_o \div GI$ (see note 3).
- (3) May use chemical-specific values or the following defaults: 0.2 for inorganic hazardous substances; 0.8 for volatile organic compounds; 0.5 for other organic hazardous substances.

Appendix C

Equations and Default Values for Calculating Protective Soil Concentrations based on the Leaching Pathway

(Protection of Ground Water)

THREE-PHASE PARTITIONING

Equation 747-1: Three-Phase Partitioning Equilibrium Equation.

$$C_s = C_w \times UCF \times DF \times \left[K_d + \frac{\theta_w + \theta_a \times H_{cc}}{\rho_b} \right]$$

Parameter	Definition	Default Value	Units
C_s	Soil concentration	(calculated)	mg/kg
C_w	Ground water cleanup level established under WAC 173-340-720	Chemical-specific	ug/L
UCF	Unit Conversion Factor	1E-3	mg/ug
DF	Dilution Factor	20	unitless
K_d	Distribution Coefficient	Chemical-specific (1)	L/kg
θ_w	Water-filled soil porosity	0.3	unitless, ml/ml
θ_a	Air-filled soil porosity	0.13	unitless, ml/ml
H_{cc}	Henry's law constant	Chemical-specific (2)	unitless
ρ_b	Dry soil bulk density	1.5	kg/L

Footnotes:

- (1) The regulation specifies default values for certain chemicals and procedures for establishing chemical-specific values. See WAC 173-340-747(4)(c).
- (2) The regulation specifies default values for certain chemicals and procedures for establishing chemical-specific values. See WAC 173-340-747(4)(d).

Equation 747-2: Derivation of a Distribution Coefficient (K_d) for Organic Hazardous Substances based on the Soil Organic Carbon-Water Partitioning Coefficient (K_{oc})

$$K_d = K_{oc} \times f_{oc}$$

Parameter	Definition	Default Value	Units
K_d	Distribution coefficient	(calculated or site-specific)	ml/g, L/kg
K_{oc}	Soil organic carbon-water partitioning coefficient	Chemical-specific (1)	ml/g, L/kg
f_{oc}	Soil fraction of organic carbon	0.001	unitless, g/g

Footnotes:

- (1) The regulation specifies default values for certain chemicals and procedures for establishing chemical-specific values. See WAC 173-340-747(4)(c)(i).

Equation 747-3: Deriving a Dilution Factor from Site-Specific Estimates of Infiltration and Ground Water Flow Volume

$$DF = \frac{(Q_p + Q_a)}{Q_p} = 1 + \frac{Q_a}{Q_p}$$

Parameter	Definition	Default Value	Units
<i>DF</i>	Dilution Factor	(calculated)	unitless
<i>Q_p</i>	Flowrate of water infiltrating (see Equation 747-5)	(calculated)	m ³ /yr
<i>Q_a</i>	Ground water flowrate (see Equation 747-4)	(calculated)	m ³ /yr

Equation 747-4: Calculating Ground Water Flowrate (*Q_a*)

$$Q_a = K \times A \times I$$

Parameter	Definition	Default Value	Units
<i>Q_a</i>	Ground water flowrate	(calculated)	m ³ /yr
<i>K</i>	Hydraulic conductivity	Site-specific measurement	m/yr
<i>A</i>	Cross-sectional Area of Aquifer mixing zone (1)	Site-specific measurement	m ²
<i>I</i>	Hydraulic Gradient	Site-specific measurement	unitless, m/m

Footnotes:

- (1) The aquifer mixing zone thickness shall not exceed 5 meters in depth and be equal to a unit width of 1 meter, unless it can be demonstrated empirically that the mixing zone thickness exceeds 5 meters.

Equation 747-5: Calculating the Flowrate of Water Infiltrating (*Q_p*)

$$Q_p = L \times W \times Inf$$

Parameter	Definition	Default Value	Units
<i>Q_p</i>	Flowrate of water infiltrating	(calculated)	m ³ /yr
<i>L</i>	Estimated length of contaminant source area parallel to ground water flow	Site-specific measurement	m
<i>W</i>	Unit width of contaminant source area	1.0	m
<i>Inf</i>	Infiltration rate	Site-specific measurement (1)	m/yr

Footnotes:

- (1) A default value may be used. For sites **west** or **east** of the Cascade Mountains, the default annual infiltration value shall be **70 percent** or **25 percent**, respectively, of the average annual precipitation amount.

FOUR-PHASE PARTITIONING

Equation 747-6: Conservation of Volume Equation.

$$n = \theta_w + \theta_a + \theta_{NAPL}$$

n	Total soil porosity (ml total pore space/ml total soil volume). Use a default value of 0.43 ml/ml or use a value determined from site-specific measurements.
θ_w	Volumetric water content (ml water/ml soil). For unsaturated soil use a default value of 0.3 or a value determined from site-specific measurements. For saturated soil this value is unknown and must be solved for. Volumetric water content equals the total soil porosity minus volume occupied by the NAPL.
θ_a	Volumetric air content (ml air volume/ml total soil volume). For unsaturated soil this value is unknown and must be solved for. Volumetric air content equals the total soil porosity minus the volume occupied by the water and NAPL. For saturated soil this value is zero.
θ_{NAPL}	Volumetric NAPL content (ml NAPL volume/ml total soil volume). For both unsaturated and saturated soil this value is unknown and must be solved for.

Equation 747-7: Four-Phase Partitioning Equilibrium Equation

$$\frac{M_T^i}{m_{soil}} = \frac{x_i S_i}{\rho_b} \left[\theta_w + K_{oc}^i f_{oc} \rho_b + H_{cc}^i \theta_a + \frac{GFW_i}{S_i} \rho_{NAPL} \theta_{NAPL} \right]$$

M_T^i	Total mass of each component in the system (mg). This value is derived from site-specific measurements.
m_{soil}	Total soil mass (kg). This value is derived from site-specific measurements.
x_i	Mole fraction (at equilibrium) of each component (dimensionless). This value is unknown and must be solved for.
S_i	Water Solubility of each component (mg/L). See Table 747-4 for petroleum hydrocarbons; see the scientific literature for other hazardous substances.
ρ_b	Dry soil bulk density (default is 1.5 kg/L).
K_{oc}^i	Soil organic carbon-water partitioning coefficient for each component (L/kg). See Table 747-4 for petroleum hydrocarbons; see WAC 173-340-747(4)(b) for other hazardous substances.
f_{oc}	Mass fraction of soil natural organic carbon (default is 0.001 g soil organic/g soil).
H_{cc}^i	Henry's law constant for each component (dimensionless). See Table 747-4 for petroleum hydrocarbons; see WAC 173-340-747(4)(c) for other hazardous substances.
GFW_i	Gram formula weight, or molecular weight of each component (mg/mol). See Table 747-4 for petroleum hydrocarbons; see the scientific literature for other hazardous substances.
ρ_{NAPL}	Molar density of the mixture (mol/L). See Equation 747-8.
Component	For petroleum mixtures, this means the petroleum fractions, and organic hazardous substances with a reference dose; for other hazardous substances, this means each organic hazardous substance that is found in the NAPL.

Equation 747-8: Molar Density Equation

$$\rho_{NAPL} = \frac{\left[\frac{\sum x_i GFW_i}{\left(\sum x_i GFW_i / \rho_i \right)} \right]}{\sum x_i GFW_i}$$

$$= \frac{1}{\sum (x_i GFW_i / \rho_i)}$$

GFW_i	Gram formula weight, or molecular weight of each component (mg/mol). See Table 747-4 for petroleum hydrocarbons; see the scientific literature for other hazardous substances.
x_i	Mole fraction (at equilibrium) of each component (dimensionless) after equilibration. This value is unknown and must be solved for.
ρ_i	Density of each component (mg/L). See Table 747-4 for petroleum hydrocarbons; see the scientific literature for other hazardous substances.
Component	For petroleum mixtures, this means the petroleum fractions plus organic hazardous substances with a reference dose; for other hazardous substances, this means each organic hazardous substance that is found in the NAPL.

Appendix D

Equations and Default Values for Calculating Air Cleanup Levels

Equation 750-1: Air Cleanup Levels – Noncarcinogens

$$\text{Air Cleanup Level (ug / m}^3\text{)} = \frac{RfD_i \times ABW \times UCF \times HQ \times AT}{BR \times ABS_i \times ED \times EF}$$

Parameter	Definition	Default Value		Units
		Method B Equation 750-1	Method C Equation 750-1	
<i>RfD_i</i>	Inhalation Reference Dose	Chemical-specific	Chemical-specific	mg/kg-day
<i>ABW</i>	Average Body Weight over the exposure duration	16	70	kg
<i>UCF</i>	Unit Conversion Factor	1.0E+3	1.0E+3	ug/mg
<i>BR</i>	Breathing Rate	10	20	m ³ /day
<i>ABS_i</i>	Inhalation Absorption fraction	1.0	1.0	unitless
<i>HQ</i>	Hazard Quotient	1.0	1.0	unitless
<i>AT</i>	Averaging Time	6	6	years
<i>ED</i>	Exposure Duration	6	6	years
<i>EF</i>	Exposure Frequency	1.0	1.0	unitless

Equation 750-2: Air Cleanup Levels – Carcinogens

$$\text{Air Cleanup Level (ug / m}^3\text{)} = \frac{RISK \times ABW \times AT \times UCF}{CPF_i \times BR \times ABS_i \times ED \times EF}$$

Parameter	Definition	Default Value		Units
		Method B Equation 750-2	Method C Equation 750-2	
<i>RISK</i>	Acceptable cancer risk level	1.0E-6	1.0E-5	mg/kg-day
<i>ABW</i>	Average Body Weight over the exposure duration	70	70	kg
<i>AT</i>	Averaging Time	75	75	years
<i>UCF</i>	Unit Conversion Factor	1,000	1,000	ug/mg
<i>CPF_i</i>	Inhalation Carcinogenic Potency Factor	Chemical-specific	Chemical-specific	kg-day/mg
<i>BR</i>	Breathing Rate	20	20	m ³ /day
<i>ABS_i</i>	Inhalation Absorption fraction	1.0	1.0	unitless
<i>ED</i>	Exposure Duration	30	30	unitless
<i>EF</i>	Exposure Frequency	1.0	1.0	years

Appendix E

Primer on TPH Fractions and Analytical Requirements for TPH Mixtures

Unlike individual hazardous substances, petroleum hydrocarbon mixtures such as gasoline, diesel fuel, lubricating oils, etc. are comprised of thousands of chemical compounds. Typically, the concentration of these mixtures is measured as “total petroleum hydrocarbons” or “TPH” that represents the expected range of these materials such as the “gasoline range” or the “diesel range”. In reality, these measured concentrations are the collective concentrations of the individual petroleum compounds. A laboratory test result for NWTPH-Gx expressed as 235 mg/kg (milligrams of TPH per kilogram of soil) for example, represents the measured total TPH concentration in the sample within the range of compounds typically contained in gasoline.

TPH mixtures can also contain specific chemicals of concern and, depending on the type of mixture, they may need to be tested to make sure a site is adequately characterized and that all cleanup requirements are considered. These include volatile compounds such as benzene, toluene, ethylbenzene and xylenes (collectively referred to as “BTEX”), n-Hexane, and Naphthalene, but may also include fuel additives such as Methyl tertiary-butyl ether (MTBE). Information contained in WAC 173-340-830 provides a more detailed discussion of the types of testing required for petroleum releases. Table 830-1 in WAC 173-340-900 is a summary of the required testing for different types of petroleum releases.

The MTCA Cleanup Regulation allows for “mixture-specific” chemical characterization of released petroleum in order to develop a cleanup level tailored to the types of compounds actually present in soil or ground water. This method, known as “TPH fractionation”, measures the concentration of twelve sub-groups or “fractions” of TPH within the released mixture and is based on work by a consortium of national experts (TPH Criteria Working Group, 1997⁴). These fraction groups are defined based upon their relative average molecular “size”, with the lighter-weight (and typically more volatile and soluble) compounds in one group, and heavier, less volatile and soluble compounds in others. The measured concentrations of each of the twelve groups are then assessed, together with their individual chemical and toxicological properties, to determine the appropriate cleanup level. Depending on the particular TPH mixture present, certain hazardous substances (i.e., benzene, carcinogenic PAHs or MTBE) must still also be measured, in addition to the individual TPH fractions.

The detailed analytical methods, including VPH (Volatile Petroleum Hydrocarbons) and EPH (Extractable Petroleum Hydrocarbons) for petroleum hydrocarbons, are described in a separate Ecology document (Analytical Methods for Petroleum Hydrocarbons, 1997⁵).

⁴ TPH Criteria Working Group, 1997. *Total Petroleum Hydrocarbon Criteria Working Group Series. Volume III: Selection of Representative Total Petroleum Hydrocarbon (TPH) Fractions Based on Fate and Transport Considerations*, Ed.: J. B. Gustafson, J. G. Tell, and D. Orem, Amherst Scientific Publishers.

NOTE: As of this writing, this and other volumes are available on the Internet through Amherst Scientific Publishers at: <http://www.aehs.com/publications/catalog/tph.htm>.

⁵ Washington State Department of Ecology, 1997. *Analytical Methods for Petroleum Hydrocarbons*, Publication No. ECY 97-602.

Appendix F

Properties of Chemicals commonly found at Petroleum Contaminated Sites

(Revised August 2006)

Revised Properties of Chemicals commonly found at Petroleum Contaminated Sites

Note: Please refer to "CLARC" for the source of Database

Revised on August 2006: Red colored and italic-typed values are revisions.

		Physical-Chemical Properties					Toxicological Properties						
CAS NO	Compound or Petroleum Equivalent Carbon Fraction	Molecular Weight	Aqueous Solubility	Henry's Law Constant	Soil Organic Carbon-Water Partitioning Coef	Liquid Density	Oral Reference Dose	Inhalation Correction Factor	Inhalation Reference Dose	Dermal Absorption Fraction	Gastrointestinal Absorption Conversion Factor	Oral Carcinogenic Potency Factor (with CalEPA's TEF for cPAHs)	Inhalation Carcinogenic Potency Factor (with CalEPA's TEF for cPAHs)
		<i>GFW</i>	<i>S</i>	<i>H_{cc}</i>	<i>K_{oc}</i>	<i>ρ</i>	<i>RfD_o</i>	<i>INH</i>	<i>RfD_i</i>	<i>ABS_d</i>	<i>GI</i>	<i>CPF_o</i>	<i>CPF_i</i>
		mg/mol	mg/L	unitless	L/kg	mg/L	mg/kg-day	unitless	mg/kg-day	unitless	unitless	kg-day/mg	kg-day/mg
	Petroleum EC Fraction												
	AL_EC >5-6	8.100E+04	3.600E+01	3.300E+01	8.000E+02	6.700E+05	<i>1.7</i>	2	<i>1.7</i>	0.03	0.8		
	AL_EC >6-8	1.000E+05	5.400E+00	5.000E+01	3.800E+03	7.000E+05	<i>1.7</i>	2	<i>1.7</i>	0.03	0.8		
	AL_EC >8-10	1.300E+05	4.300E-01	8.000E+01	3.020E+04	7.300E+05	0.03	2	0.085	0.03	0.8		
	AL_EC >10-12	1.600E+05	3.400E-02	1.200E+02	2.340E+05	7.500E+05	0.03	2	0.085	0.03	0.8		
	AL_EC >12-16	2.000E+05	7.600E-04	5.200E+02	5.370E+06	7.700E+05	0.03	1	<i>0.085</i>	0.1	0.5		
	AL_EC >16-21	2.700E+05	1.300E-06	4.900E+03	9.550E+09	7.800E+05	2	1		0.1	0.5		
	AL_EC >21-34	4.000E+05	1.500E-11	1.000E+05	1.070E+10	7.900E+05	2	1		0.1	0.5		
	AR_EC >8-10	1.200E+05	6.500E+01	4.800E-01	1.580E+03	8.700E+05	<i>0.1</i>	2	<i>0.114</i>	0.03	0.8		
	AR_EC >10-12	1.300E+05	2.500E+01	1.400E-01	2.510E+03	9.000E+05	<i>0.02</i>	2	<i>0.00086</i>	0.03	0.8		
	AR_EC >12-16	1.500E+05	5.800E+00	5.300E-02	5.010E+03	1.000E+06	0.05	1	<i>0.05</i>	0.1	0.5		
	AR_EC >16-21	1.900E+05	5.100E-01	1.300E-02	1.580E+04	1.160E+06	0.03	1		0.1	0.5		
	AR_EC >21-34	2.400E+05	6.600E-03	6.700E-04	1.260E+05	1.300E+06	<i>0.04</i>	1		0.1	0.5		
71-43-2	Benzene	7.800E+04	1.750E+03	2.280E-01	6.200E+01	8.765E+05	<i>0.004</i>	2	<i>0.00855</i>	0.0005	0.95	0.055	0.027
108-88-3	Toluene	9.200E+04	5.260E+02	2.720E-01	1.400E+02	8.669E+05	<i>0.08</i>	2	<i>1.4</i>	0.03	1		
100-41-4	Ethylbenzene	1.060E+05	1.690E+02	3.230E-01	2.040E+02	8.670E+05	0.1	2	0.286	0.03	0.92		
	Total Xylenes	1.060E+05	1.710E+02	2.790E-01	2.330E+02	8.752E+05	<i>0.2</i>	2	<i>0.029</i>	0.03	0.9		
91-20-3	Naphthalene	1.280E+05	3.100E+01	1.980E-02	1.191E+03	1.145E+06	0.02	2	0.00086	0.13	0.89		
90-12-00	1-Methyl Naphthalene	<i>1.422E+05</i>	<i>2.500E+01</i>	<i>2.100E-02</i>	<i>3.038E+03</i>	<i>1.025E+06</i>	<i>0.05</i>	2	<i>0.05</i>	<i>0.01</i>	0.8		
91-57-6	2-Methyl Naphthalene	<i>1.422E+05</i>	<i>2.460E+01</i>	<i>2.120E-02</i>	<i>2.976E+03</i>	<i>9.900E+05</i>	<i>0.004</i>	2	<i>0.00086</i>	<i>0.01</i>	0.8		
110-54-3	n-Hexane	8.600E+04	9.500E+00	7.400E+01	3.410E+03	6.594E+05	0.06	2	0.2	0.03	0.8		
1634-04-4	MTBE	8.800E+04	5.000E+04	1.800E-02	1.090E+01	7.440E+05		2	<i>0.857</i>				
106-93-4	Ethylene Dibromide (EDB)	1.879E+05	3.400E+03	1.290E-02	6.600E+01	2.170E+06	<i>0.009</i>	2	<i>0.00257</i>	0.03	0.8	85	0.76
107-06-2	1,2 Dichloroethane (EDC)	9.900E+04	8.520E+03	4.010E-02	3.800E+01	1.253E+06	0.03	2	0.0014	0.03	0.8	0.091	0.091
56-55-3	Benzo(a)anthracene	2.283E+05	9.400E-03	1.370E-04	3.575E+05	1.274E+06		1		0.13	0.89	0.73	0.61
205-99-2	Benzo(b)fluoranthene	2.523E+05	1.500E-03	4.550E-03	1.230E+06	1.300E+06		1		0.13	0.89	0.73	0.61
207-08-9	Benzo(k)fluoranthene	2.523E+05	8.000E-04	3.400E-05	1.230E+06	1.300E+06		1		0.13	0.89	0.73	0.61
50-32-8	Benzo(a)pyrene	2.523E+05	1.620E-03	4.630E-05	9.688E+05	1.300E+06		1		0.13	0.89	7.3	6.1
218-01-9	Chrysene	2.283E+05	1.600E-03	3.880E-03	3.980E+05	1.274E+06		1		0.13	0.89	0.073	0.061
57-70-3	Dibenz(a,h)anthracene	2.780E+05	2.490E-03	6.030E-07	1.789E+06	1.260E+06		1		0.13	0.89	2.92	2.44
193-39-5	Indeno(1,2,3-cd)pyrene	2.763E+05	2.200E-05	6.560E-05	3.470E+06	1.300E+06		1		0.13	0.89	0.73	0.61