



Welcome to the CLU-IN Internet Seminar

Superfund Research Program Sediment Bioavailability Assays - Kick-off
Webinar Featuring New Research Projects

Sponsored by: NIEHS Superfund Research Program

Delivered: May 7, 2012, 3:00 PM - 5:00 PM, EDT (19:00-21:00 GMT)

Instructors:

Rolf U. Halden, Arizona State University-Tempe Campus (Halden@asu.edu)

James Ranville, Colorado School of Mines (jranvill@mines.edu)

Jay Gan, University of California Riverside (jgan@ucr.edu)

Upal Ghosh, University of Maryland Baltimore County Campus (ughosh@umbc.edu)

Michael Unger, Virginia Institute of Marine Science (munger@vims.edu)

Moderator:


Heather Henry, Program Administrator for the Superfund Research Program at the National Institute of Environmental Health Sciences (NIEHS)

Visit the Clean Up Information Network online at www.cluin.org

1

Housekeeping

- Please mute your phone lines, Do NOT put this call on hold
- Q&A
- Turn off any pop-up blockers
- Move through slides using # links on left or buttons

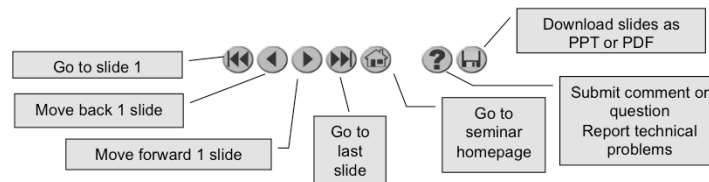

- This event is being recorded
- Archives accessed for free <http://clu.in.org/live/archive/>

2

Although I'm sure that some of you have these rules memorized from previous CLU-IN events, let's run through them quickly for our new participants.

Please mute your phone lines during the seminar to minimize disruption and background noise. If you do not have a mute button, press *6 to mute #6 to unmute your lines at anytime. Also, please do NOT put this call on hold as this may bring delightful, but unwanted background music over the lines and interrupt the seminar.

You should note that throughout the seminar, we will ask for your feedback. You do not need to wait for Q&A breaks to ask questions or provide comments. To submit comments/questions and report technical problems, please use the ? Icon at the top of your screen. You can move forward/backward in the slides by using the single arrow buttons (left moves back 1 slide, right moves advances 1 slide). The double arrowed buttons will take you to 1st and last slides respectively. You may also advance to any slide using the numbered links that appear on the left side of your screen. The button with a house icon will take you back to main seminar page which displays our agenda, speaker information, links to the slides and additional resources. Lastly, the button with a computer disc can be used to download and save today's presentation materials.

With that, please move to slide 3.



engineering.asu.edu

IRA A. FULTON SCHOOLS OF ENGINEERING

Leading engineering discovery and innovative education for global impact on quality of life.

In Situ Sampling Tool for Assessing Bioavailability (IS2B)



Rolf U. Halden	Nancy Denslow
Sam Supowit	Viet Dang
Isaac Roll	Kevin Kroll


UF UNIVERSITY of
FLORIDA
The Foundation for The Gator Nation

Srp
Superfund
Research Program

ASU ARIZONA STATE
UNIVERSITY

3

Can Bioavailability be Assessed Without Analyzing Exposed Organisms?

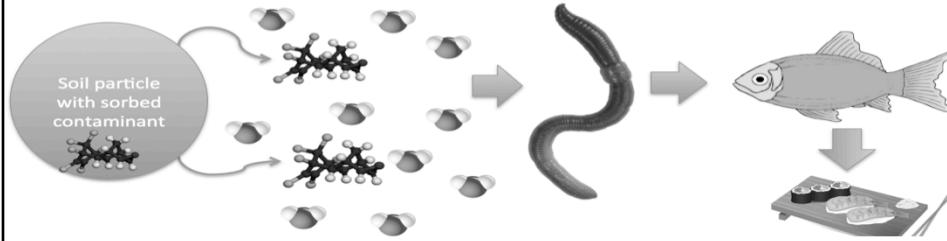


Organochlorine Pesticides




- Most uses banned for decades
- Ecologically persistent
- High rate of use in Florida
- Aquatic sediment contamination
- ENDOCRINE DISRUPTORS

Contaminants in largemouth bass before and after living in mesocosms for 4 months



Approach: Performing SPE In Situ

Solid phase extraction (SPE) resins (C_{18} etc.) are charged in situ in a sampler that actively concentrates analytes from porewater using a peristaltic pump and slow flow rates.

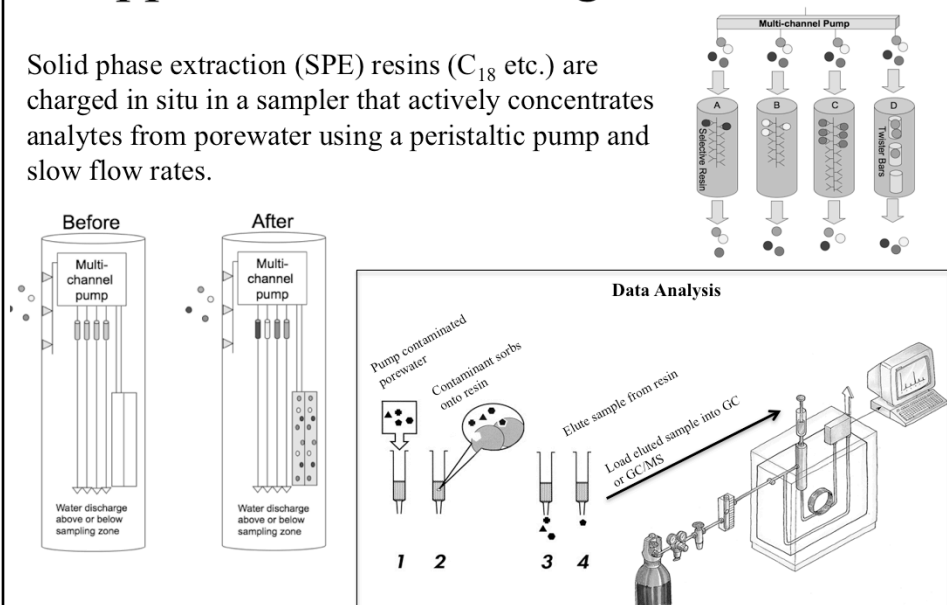


Halden, R. U. and I. B. Roll. Devices and Methods for the Determination of the Bioavailability of Pollutants. Provisional Patent Application, ASU, 2011.


5

Project Overview

Goal: create an empirical model that relates sediment/bulk-water toxicant levels to their associated adverse effects in animals (worms/fish), so that a simple physical measurement of both concentrations can inform on the bioavailability and toxicity of sediment-borne pollutants.

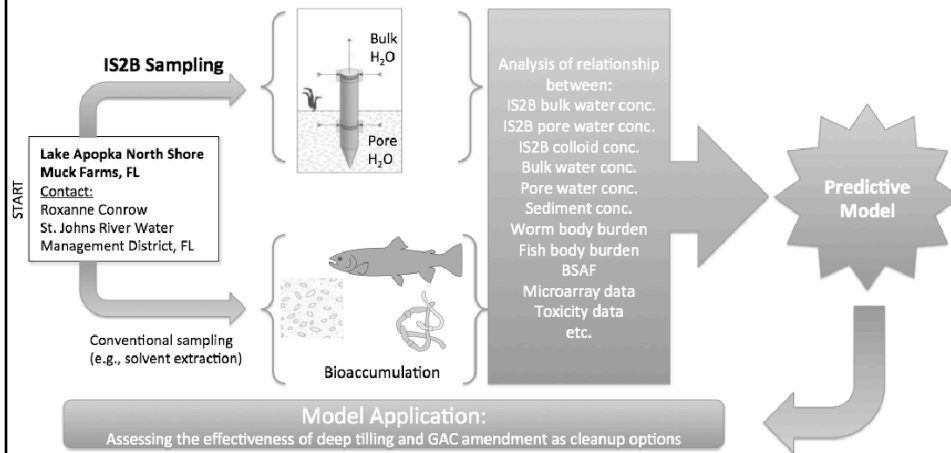

Tools for Method Development and Validation

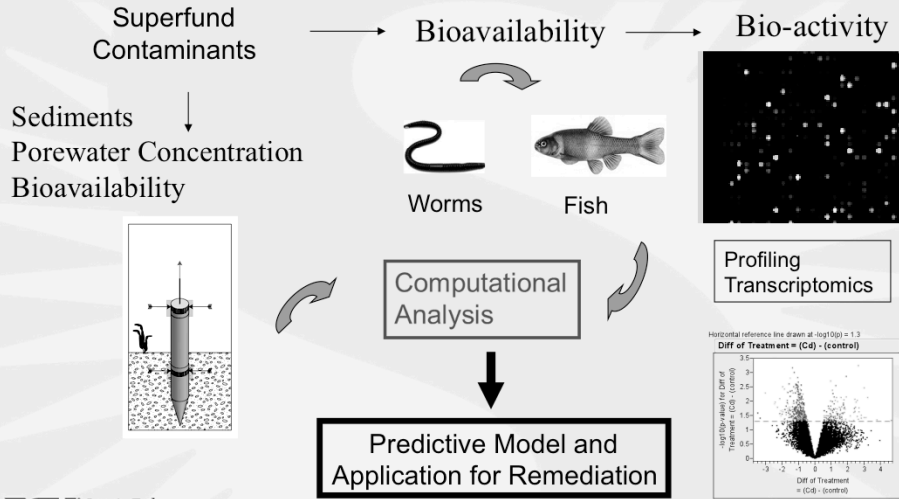

ASU Ira A. Fulton
Schools of Engineering
ARIZONA STATE UNIVERSITY

UF UNIVERSITY of
FLORIDA
The Foundation for The Gator Nation

engineering.asu.edu

Remediation Effectiveness for Mining Sites: Hysteresis and Metal Mixture Effects

Principal Investigators

James Ranville
Christopher Higgins

James Shine
William Clements
Joseph Meyer

Colorado School of Mines



Harvard School of Public Health



Colorado State University



Arcadis





Site Collaborator

Mike Holmes

USEPA Region VIII



Field Study: Blackhawk/Central City Superfund Site

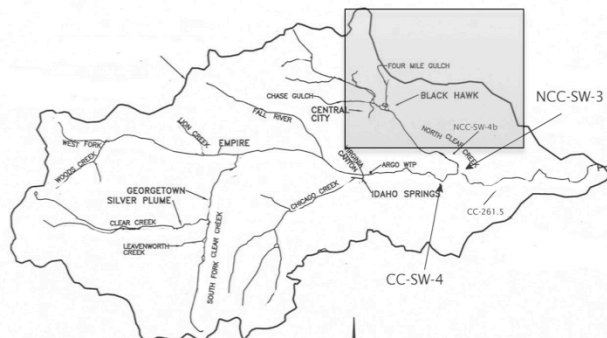

Problem:


- Two AMD sources introduce dissolved metals (Cu, Zn, Cd)
- Stream sediments have accumulated Fe, Al, Mn oxide precipitates and associated metals

Opportunity:

- Examine the recovery of the stream following restoration (late 2013)

Research Approach


- laboratory/mesocosm/in-stream experiments & field observations

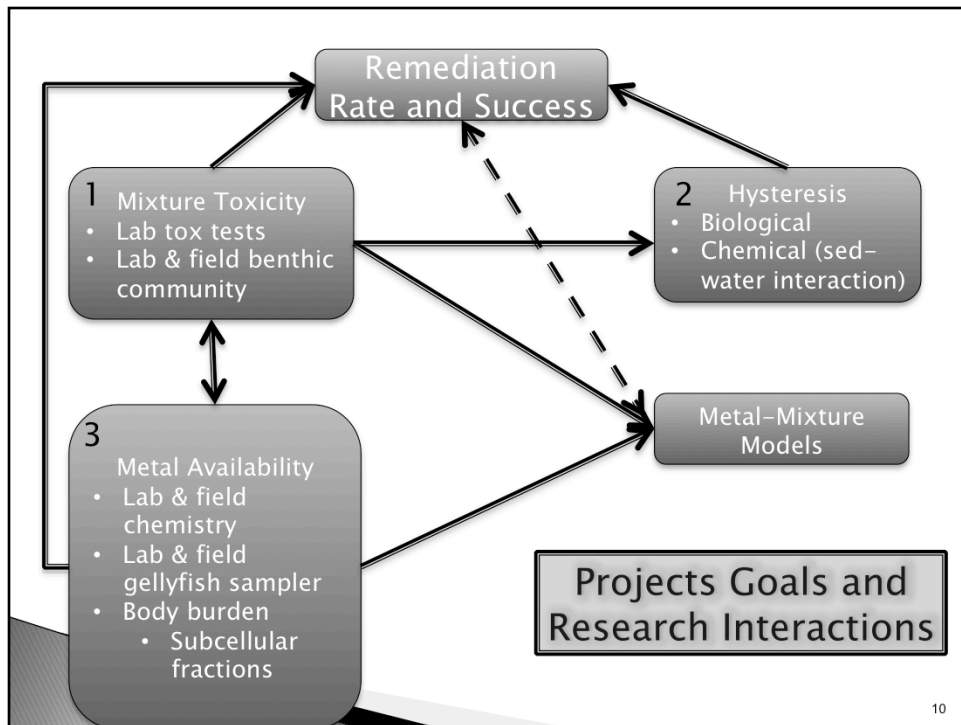

- Metals are regulated on an individual basis but usually occur in mixtures in aquatic systems
- Metal-mixture toxicity can be:
 - additive
 - less-than-additive
 - more-than-additive

1 Mixture Toxicity

- Lab tox tests
- Lab & field benthic community


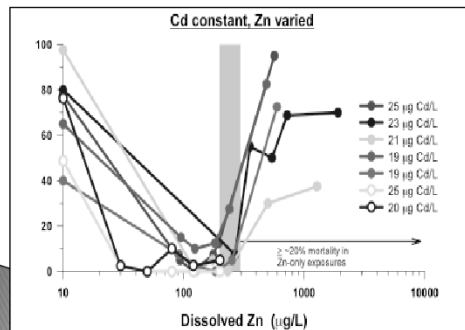


Addition of low levels of Zn reduces Cd toxicity to *D. magna*

Concentrations of individual dissolved metals might not be good predictors of mixture toxicity

► Physical and Chemical Aspects of Stream Sediments

- Sediments can be loosely deposited flocs or armored coating on rocks
- These forms of metal-containing sediments may be removed at different rates and by different processes
 - Desorption
 - Dissolution
 - Mechanical scouring

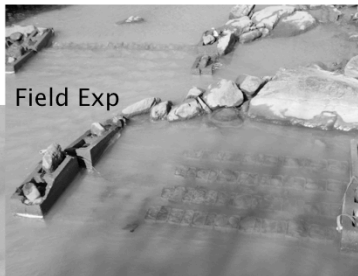

2 Hysteresis

- Biological
- Chemical (sed-water interaction)

- There may be a delay (hysteresis) in recovery following remediation
- Different degrees of chemical and biological hysteresis may result for different metals

3

Metal Availability

- Lab & field chemistry
- Lab & field gellyfish sampler
- Body burden
 - Subcellular fractions



Gellyfish:

-Iminodiacetate (IDA) metal-binding resin held within a polyacrylamide wafer equilibrates with free metal ions

-Calculate free metal-ion concentrations in surrounding solution (Cu^{2+} , Ni^{2+} , Cd^{2+} , Pb^{2+} , Zn^{2+}); can account/correct for competitive metal-metal interactions

-Test whether Gellyfish results correlate with instream invertebrate community responses

⇒ will help explain bioavailability mechanisms

COMBINING BIOAVAILABILITY ASSAYS WITH MODELING TO PREDICT PCBS IN FISH AFTER REMEDIATION

Upal Ghosh and Hilda F. Khoei

Dept. of Chemical, Biochemical, and Environmental Engineering, UMBC

Allen Place and Aaron Watson

Institute of Marine and Environmental Technology, UMCES

John Connolly


Anchor QEA

SRP Webinar for Sediment Bioavailability May 7 2012



14

ASSESSING REMEDIATION EFFECTIVENESS

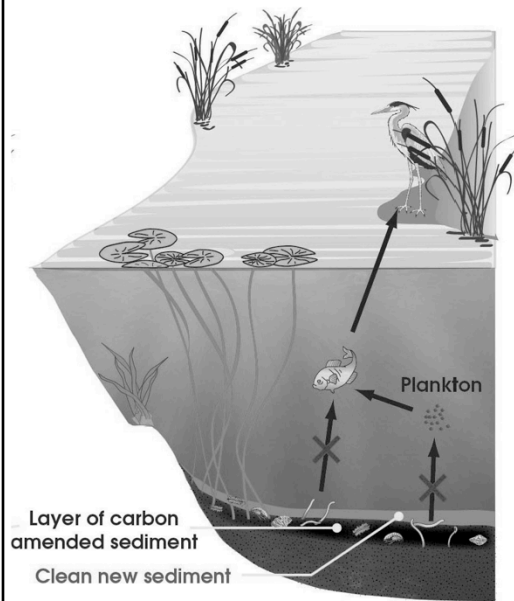

Our recent work has demonstrated that activated carbon amended to surficial sediments reduces contaminant exposure to food chain through:


- Reduced bioaccumulation in benthic organisms
- Reduced flux into water column and uptake in the pelagic food web.

• **Evaluation of in-situ remedy requires measurement of exposure pathways**

• **Traditional measurement of residual surface concentration not useful in assessing bioavailability reduction**

PASSIVE SAMPLERS USEFUL IN ASSESSING EXPOSURE

Bioavailability measurements useful when they can be used to measure exposure pathways

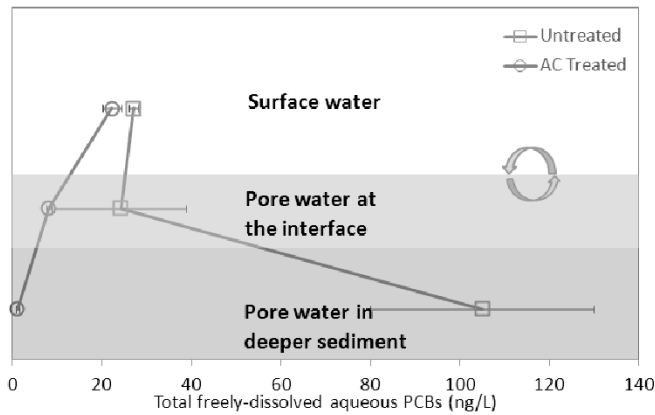

RESEARCH AIMS

Specific aim 1: Develop the fundamental basis of passive sampling.

Approach: Using a combination of thin sectioning and micro-scale analytical techniques quantify PCB diffusion in and out of common polymers used for measurement.

Specific aim 2: Use passive sampling to measure bioavailability processes and uptake in fish.

Approach: Perform laboratory aquaria studies to assess uptake in a pelagic and benthic feeding fish for treated and untreated PCB impacted sediment.

Specific aim 3: Incorporate passive sampling inputs to PCB fate and bioaccumulation model.

Approach: Model PCB exposure to: 1) interpret results from the mesocosm exposure experiments, and 2) use these results and field observations to explore the efficacy of in situ remediation on PCB accumulation in fish

FIRST SET OF LABORATORY EXPOSURE EXPERIMENTS



Treatments: clean sediment, PCB impacted sediment, PCB impacted sediment-AC treated
Replicate aquaria with passive samplers in water column and sediment
Two species of fish: a pelagic feeder and a benthic feeder
Uptake in algae, daphnia, and oligochaetes
Sediment Source: Grasse River NY

ACKNOWLEDGEMENTS

Students: Hilda Fadei Khoei (UMBC), Aaron Watson (IMET)

Source of funding: NIEHS Superfund Research Program

Source of PCB-impacted sediments: Grasse River, NY. Larry McShea Alcoa.

A real-time antibody-based field assay to predict contaminant bioavailability in sediments

VIMS | WILLIAM & MARY
VIRGINIA INSTITUTE OF MARINE SCIENCE

PIs: Michael Unger, Stephen Kaattari, Wolfgang Vogelbein
Virginia Institute of Marine Science, College of William & Mary, Gloucester Point, VA
Collaborator: Josef Rieger, The Elizabeth River Project, Portsmouth, VA



Bioaccumulation models are needed

- Analysis of biota expensive/ time consuming
- Variability can hinder model predictions
- Real-time analysis of the bioavailable component is needed


For this NIEHS-SRP project we will evaluate, refine and validate a quantitative, monoclonal antibody (mAb)-based sensor to measure polycyclic aromatic hydrocarbons (PAH) in sediment-associated water as a rapid predictor of PAH bioaccumulation in the oyster.



20

Measuring contaminant uptake in biota is time consuming and expensive so models have been developed to predict contaminant fate and disposition. However, temporal variability and heterogeneity of natural and remediated habitats make it difficult to apply models to reliably predict bioaccumulation for risk assessments. Recent advances in biosensor technology now allows near real-time measurement of contaminants in the field at sub part per billion concentrations that should provide good prediction of bioaccumulation.


Antibody Biosensor Technology




**Sāpidyne
Instruments Inc.**

KinExA Inline Sensor

Fluorescence detection, rapid (minutes), small sample volume (1mL)




PAH selective antibody (Spier et al, 2009, Anal. Biochem.)




Sensitive (sub-ppb)
and precise

Antibodies can be
selected for various
targets (ie. 3-5 rings)

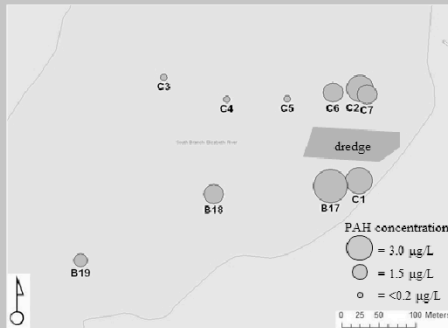

Field tested during
Elizabeth River
sediment
remediation efforts



Good correlation with
GC-MS results
(Spier et al, 2011,
Environ. Chem. Tox.)


Aim 1. Conduct on-site PAH measurements of water using a rapid, cost-effective real-time biosensor and test its ability to predict tissue burdens in oysters from PAH-contaminated environments.



Six sites with wide range of PAH contamination: Reference sites and Superfund clean-up of creosote contaminated sediment

Measure PAH in water and pore water by Biosensor and GC-MS measurement of PAH in water, pore water, sediment and oyster tissues (natives and transplants)

Aim 2. Conduct controlled laboratory dosing of oysters to validate the biosensor as an effective predictor of oyster tissue burdens as a strict function of dose (concentration, time).

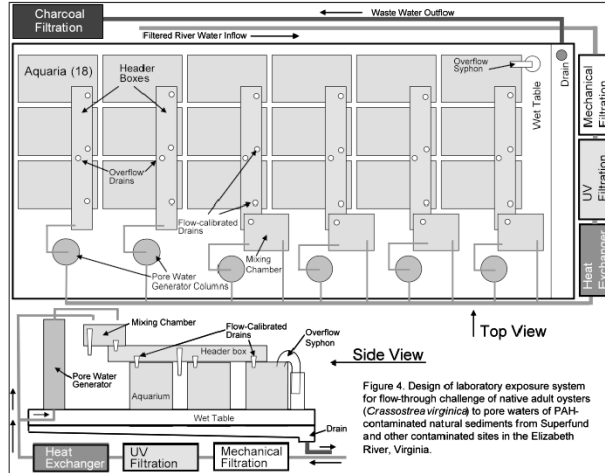


PAH contaminated sediments collected in the field will be used to generate pore water solutions to dose oysters with a range of PAH concentrations and distributions to evaluate bioaccumulation

These exposures will assess biosensor performance at predicting PAH bioaccumulation under controlled laboratory conditions

The system will also be used to evaluate sediment remediation techniques and how they alter PAH concentrations in the aqueous phase and how that alters bioavailability

Aim 3. Extend current Biosensor capabilities via development of a bi- or multi-analyte biosensor that permits rapid, combined monitoring of different PAH classes within a single site.



Preliminary work has shown that our biosensor platform can be adapted to use more than one antibody to quantify multiple analytes in a sample

Based on the results of our field and laboratory evaluations, a repertoire of PAH antibodies will be incorporated to improve the biosensor prediction capabilities for specific PAH or groups of PAH

Summary-The three specific aims of this project are designed to help us understand how:

- PAH concentrations measured by antibody detection in the aqueous phase can predict the biologically available fraction of the total contaminant pool in sediments
- Sediment characteristics and remediation approaches influence the bioavailability and steady state bioaccumulation of PAH from the aqueous phase
- Additional antibody specificities can be used in combination to better predict contaminant bioavailability to aquatic organisms.



Use of Stable Isotopes in Bioavailability Assessment

PI: Jay Gan, University of California, Riverside

Co-PI: Dan Schlenk, UC Riverside

Collaborators: K. Maruya, SCCWRP, CA

Joe Gully, LA Sanitation District



25

UC RIVERSIDE

Why Bioavailability?




- Caused by phase partition
- Driven by hydrophobicity

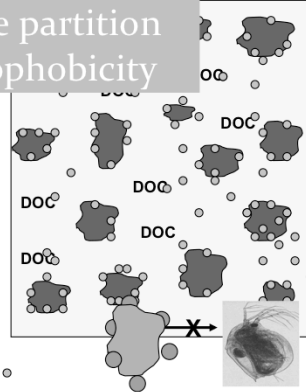

Contaminant ◦



Measuring Bioavailability

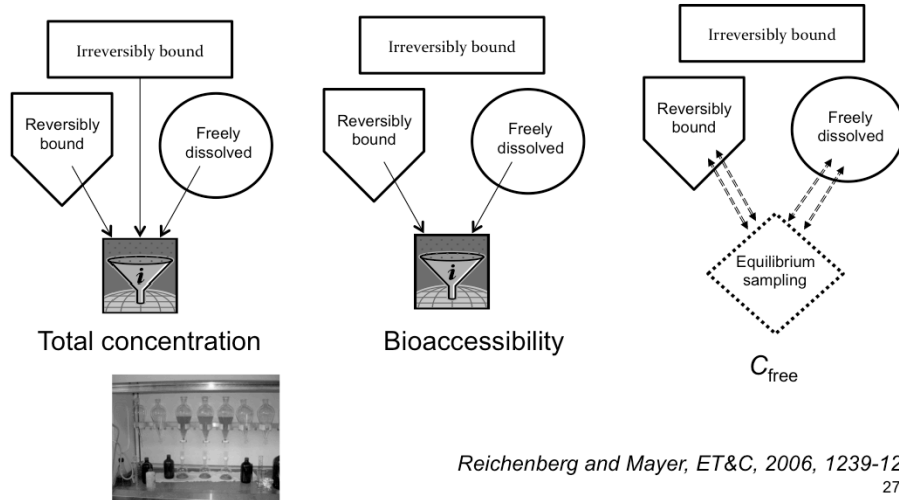

Reichenberg and Mayer, ET&C, 2006, 1239-1245
27

Current Methods and Limitations

Bioaccessibility


- Partially depletive
 - Mild solvent extraction
 - Gut fluid extraction
 - Cyclodextrin extraction
 - Tenax adsorption extraction

Limitations

- Mild solvent extraction
 - Varies with solvent strength
 - Influenced by extraction time or conditions
- Tenax, HPCD
 - Multi-step extractions
 - Tedious
 - Impractical

Isotope Exchange/Dilution

- HOC in a soil (or sediment) (C_t) is distributed in different forms:

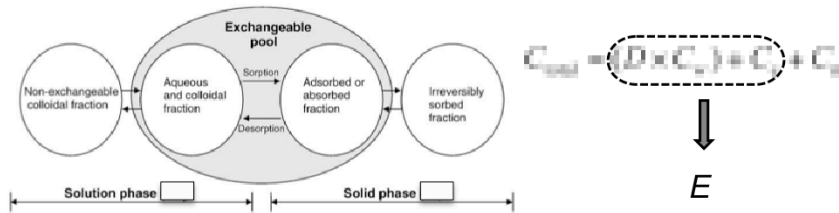



C_w = soluble (isotopically dilutable)

C_e = reversible sorbed (isotopically exchangeable)

C_n = irreversible fixed (non-isotopically exchangeable)

E Predicts Bioaccumulation

Results

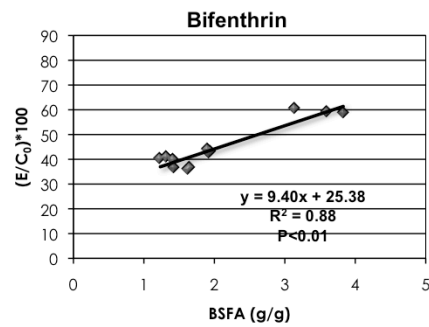
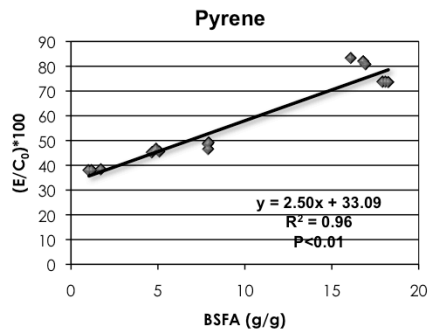


➤ Feasibility:

- Labeled compounds commonly available, at low cost
- GC-MS commonly available in labs
- No safety concerns

30

Palos Verdes Superfund Site



Method application:

- Palos Verdes Shelf
- Sediments severely contaminated with DDT, PCBs
- Scheduled for capping in 2012-2013
- In collaboration with LA County Sanitation District (Mr. J. Gully) and SCCRWP (Dr. K. Maruya)

Resources & Feedback

- To view a complete list of resources for this seminar, please visit the **Additional Resources**
- Please complete the **Feedback Form** to help ensure events like this are offered in the future

The screenshot shows a web form titled "U.S. EPA Technical Support Project Engineering Forum Green Remediation: Opening the Door to Field Use Session C (Green Remediation Tools and Examples) Seminar Feedback Form". It includes a sidebar with links like "Go to Seminar", "Links", "Feedback", "Home", "CLU-IN Studio", and "Delivery Media". The main form area contains fields for "First Name", "Last Name", "Email", "Daytime Phone Number", and "Email Address". Below these fields is a checkbox labeled "Please send a copy of my feedback confirmation as a record of my participation to this address." and a "Submit" button.

Need confirmation of your participation today?

Fill out the feedback form and check box for confirmation email.

New Ways to stay connected!

- Follow CLU-IN on Facebook or Twitter starting April 1, 2012



<https://www.facebook.com/EPACleanUpTech>



<https://twitter.com/#!/EPACleanUpTech>